MIL-C-10015D
26 August 1982
SUPERSEDING
MIL-C-10015C
15 June 1967

MILITARY SPECIFICATION

CHEST, TOOL KIT, EMPTY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type and size of tool kit chest, complete with padlock, for the electricians No. 1 tool kit.

2. APPLICABLE DOCUMENTS

2.1 Government documents. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-H-111	-	Hardware, Builders'; Shelf and Miscellaneous
RR-C-271	-	Chains and Attachments, Welded and Weldless
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-E-529	-	Enamel, Alkyd, Semi-Gloss
TT-P-636	-	Primer Coating, Alkyd, Wood and Ferrous Metal
TT-V-71	-	Varnish, Interior, Floor and Trim
MMM-A-125	-	Adhesive, Casein-Type, Water and Mold Resistant
MMM-A-188	-	Adhesive, Urea-Resin-Type (Liquid and Powder)
PPP-T-60	-	Tape: Packaging, Waterproof

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-H-10044 - Hinges, Chest, Offset

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services
FED-STD-595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment
MIL-STD-1363 - Measurement of Wood Moisture Content
MS 35647 - Padlocks, Key Operated

DRAWINGS

U.S. ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

3-3-43 - Chest, Tool-Kit, Empty, Illustrations, Top, Front and End Views
3-3-44 - Chest, Tool-Kit, Empty, Details

(Miniature copies of Drawings 3-3-43 and 3-3-44, identified as figures 1 and 2, are attached for information purposes only.)

(Copies of documents required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. Unless otherwise specified, the following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this document to the extent specified herein.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 29 - Steel Bars, Carbon and Alloy, Hot Wrought and Cold Finished General Requirements for
A 109 - Steel, Carbon, Cold-Rolled Strip

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified, a sample shall be subjected to first article inspection (see 4.3, 6.2 and 6.3).

3.2 Materials. Materials shall conform to the requirements specified herein and in the subsidiary documents applicable thereto (see 6.4).

3.2.1 Wood. Wood shall be uniformly dried, without brashness, honeycombing or case hardening. At time of fabrication, the wood shall have a moisture content of 8 to 12 percent when tested as specified in 4.4.1.1. The wood shall be any of the following species:

Hardwoods

Red Alder
Ash
Aspen
Basswood
Beech
Birch
Buckeye
Cottonwood
Elm
Gum
Magnolia
Maple
Oak
Sycamore
Willow
Yellow Poplar

Soft woods

Cedar
Cypress
Douglas Fir
Fir (Abies Sp.)
Hemlock
Larch
Pine
Redwood
Spruce

3.2.2 Adhesives.

3.2.2.1 Adhesive, casein-type. Adhesive shall conform to any type of MMM-A-125.

3.2.2.2 Adhesive, urea-resin-type. Adhesive shall conform to any type of MMM-A-188.

3.2.3 Steel strip, low carbon. Low carbon strip shall conform to ASTM A 109. The steel strip shall be cold-rolled temper No. 3. Composition, when applicable, shall be as specified on drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

3.2.4 Steel bar, carbon. Carbon steel bar stock shall be round, hot rolled, cold finished, 1015 - 1025, conforming to ASTM A 29.

3.2.5 Primer. Primer shall conform to TT-P-636.

3.2.6 Varnish. The varnish shall conform to TT-V-71.

3.2.7 Enamel. The enamel shall conform to TT-E-529. The color shall be olive drab No. X24087 of FED-STD-595.

3.2.8 Hinge, chest, offset. The hinges shall conform to size 2 by 7/8-inch of MIL-H-10044.

3.2.9 Hasp and staple plate. The hasp and staple plate shall conform to type F1405, size 4-1/2-inch, finish US2C of FF-H-111.

3.2.10 Chain, sash. The sash chain shall be steel, conforming to type II, class 3, trade number 40, zinc coated finish of RR-C-271.

3.2.11 Padlock with clevis and chain. The padlock with clevis and chain shall be size 1-1/2 inch conforming to MS 35647-3, except that the chain shall be zinc coated steel.

3.2.12 Hardware, miscellaneous. All screws, nuts, bolts, washers, lockwashers, and rivets shall be of commercial quality. All threaded hardware shall be in accordance with the applicable requirements of FED-STD-H28.

3.3 Construction. The construction of the chest shall conform to the design, details and dimensions shown on Drawings 3-3-43 and 3-3-44, and as specified hereinafter. After assembly, with the tray in place, the lid shall fit on the body with not more than 1/32 inch opening at any point. Nails shall not be driven out through the sides of the wood. All wood screws shall be securely fastened. Lead holes shall be provided for all wood screws prior to fastening.

3.3.1 Body and tray. The body and tray shall be constructed of wood specified in 3.2.1, providing that the body and tray of any one chest are of the same species. The exposed surfaces of all wood shall be evenly and smoothly dressed. Wood parts shall be free of decay, holes, loose knots, splits, warps and brashness. Tight knots shall not exceed 3/4 inch in diameter. Checks or shakes shall not be more than 1/32 inch in width and 8 inches long. Bark, gum or pitch pockets shall not be more than 1/8 inch in width by 8 inches long.

3.3.1.1 Body. The exterior panels shall be fabricated from wood not less than 2 inches in width and of the thickness shown on applicable drawings. The lid, bottom, sides, and ends, when made with two or more widths of wood, shall have edges glued with adhesive specified in 3.2.2.1 or 3.2.2.2. Adhesive shall be uniformly applied to joint surfaces, and all joints shall be clamped after application. Clamping, pressure, and pressure time shall be in accordance with the recommendations of the adhesive manufacturer. The bindings shall be fabricated from steel specified in 3.2.3 and shall fit flush to the wood surface without ripples. The handle shall be fabricated from steel specified in 3.2.4. Rivets shall be neatly and securely headed.

Source: https://assist.dla.mil -- Downloaded: 2026l0-17T13:21Z
Check the source to verify that this is the current version before use.

3.3.1.2 Tray. The tray shall be easily removable, fit securely on the tray supports, and shall not interfere with the operation of the chest lid.

3.4 Finish.

3.4.1 Pretreatment. Before assembly to the chest, all hardware, except the nails and the padlock with chain, shall be pretreated in accordance with type I or II of TT-C-490.

3.4.2 Priming. After assembly of sides, ends, bottom, and lid of the chest, but before any hardware is attached, all wood surfaces, including tray and treated metal surfaces, shall be coated with primer specified in 3.2.5.

3.4.3 Varnishing. After priming, the inside of the chest, including the tray, shall be coated with varnish specified in 3.2.6.

3.4.4 Enameling. After complete assembly of hardware to chest, the entire exterior surfaces of the chest and hardware shall be coated with enamel specified in 3.2.7.

3.5 Marking. The chests shall be marked in accordance with MIL-STD-130, and in the location shown on applicable drawing.

3.6 Workmanship. The tool chest and components shall be free of burrs, slivers, splinters and rough or sharp edges. Components shall not be broken, cracked or malformed. The enamel shall level out to a continuous dry adherent film thickness without runs, drops, streaks or areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking, or blistering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

4.3 First article. When a first article is required (see 6.2), it shall be examined for the defects specified in table II and III and for the dimensions specified. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Moisture content testing. Testing for moisture content shall be performed in accordance with MIL-STD-1363 for compliance with 3.2.1. Three determinations shall be taken on each sample unit and the results for the unit shall be the average of the three determinations. The lot shall be all the wood offered for inspection at one time. The sample unit shall be one piece of wood. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5.

4.4.2 In-process inspection.

4.4.2.1 Manufacturing operation examination. Examination shall be made during the manufacturing process for conformance to requirements to establish that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and processes.

TABLE I. Manufacturing operation

Requirement	Requirement paragraph
Lead holes for wood screws	3.3
Pretreatment of hardware	3.4.1
Priming of wood and treated metal surfaces	3.4.2

4.4.2.2 Visual examination of intermediate product. An examination shall be made of the partially assembled chest for defects listed in table II. The sample unit shall be one assembled chest, including tray, before hardware is attached and prior to priming. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

TABLE II. Visual examination of intermediate product

Examine	Defect
Wood	Not specified species
	Body and tray not same species
	Exposed surfaces not evenly and smoothly dressed
	Decay, loose knots, splits, warps or brashness
	Tight knots over 3/4 inch in diameter
	Checks or shakes more than 1/32 inch wide or 8 inches long
	Bark, gum, or pitch pockets more than 1/8 inch wide or 8 inches long

4.4.3 End item visual examination. The end item shall be examined for the defects listed in table III. The lot size shall be expressed in units of chests. The sample unit shall be one chest. The inspection level shall be II and the AQL expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE III. Visual defects

Examine	Defect	Classification Major	Minor
Finish	Varnish or enameling not as specified	X	
	Not color specified		X
	Area of no film		X
	Not continuous or is not smooth		X
	Contains runs, drops, or streaks		X
	Foreign matter imbedded		X
	Evidence of peeling, flaking, or blistering		
Construction and workmanship	Component missing	X	
	More than 1/32 inch opening between tray and body at any point		X
	Nails driven out through sides of wood	X	
	Bindings do not fit flush to wood surface		X
	Rivets not neatly and securely headed		X
	Tray not removable	X	
	Tray does not fit securely on supports		X
	Tray prevents operation of lid	X	
	Any burrs, slivers, splinters, or rough or sharp edges	X	
	Component broken, cracked, or malformed	X	
	Chain for lock or for case not fastened properly		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

TABLE III. Visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Marking	Omitted, incomplete, illegible, incorrect, or wrong size or location		X

4.4.4 End item dimensional examination. The end item shall be examined for conformance to the specified dimensions. Any measurement deviating from the specified dimension shall be classified as a defect. The lot size shall be expressed in units of chests. The sample unit shall be one chest. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging inspection. An examination shall be made to determine that preservation and marking comply with the section 5 requirements. Defects shall be scored in accordance with table IV. The sample unit shall be one tool chest fully packaged. The lot size shall be the number of tool chests in the end item inspection lot. The inspection level shall be S-2 and the AQL, expressed in terms of defect per hundred units, shall be 2.5.

TABLE IV. Packaging defects

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing or damaged.
Workmanship	Keys not wired to padlock.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. The tray of each chest shall be secured in place by use of fiberboard pads or inserts to prevent movement while in transit. The lid shall then be closed and locked with the lock provided. The two keys shall be secured to the shackle of the lock with minimum 0.072 inch diameter annealed wire. The lock, keys, and chain shall then be wrapped with tape conforming to class 1 of PPP-T-60.

5.1.2 Commercial. Chests shall be packed in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

5.2 Marking. In addition to any special marking required by the contract or purchase order, each chest shall be provided with two shipping tags secured to the handles with minimum 0.072 inch diameter annealed wire. The tags and markings thereon shall be in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

6. NOTES

6.1 Intended use. The chest is intended for use as a container and component of MIL-T-11196, Tool-Kit, Electricians', Number one.

6.2 Ordering data. Acquisition documents should specify the following:

(a) Title, number and date of this document.
(b) When a first article is required (see 3.1, 4.2 and 6.4).
(c) Selection of applicable level of packing (see 5.1).

6.3 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of DAR 7-104.55. The first article should be a preproduction sample. The first article should consist of one unit. The contracting officer should include specific instructions in all acquisition documents regarding arrangements for inspection and approval of the first article.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:

Army - GL
Air Force - 99

Review activity:

Army - CR

User activities:


Army - ME
Navy - MC

Preparing activity:

Army - GL

Project No. 5140-0073

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

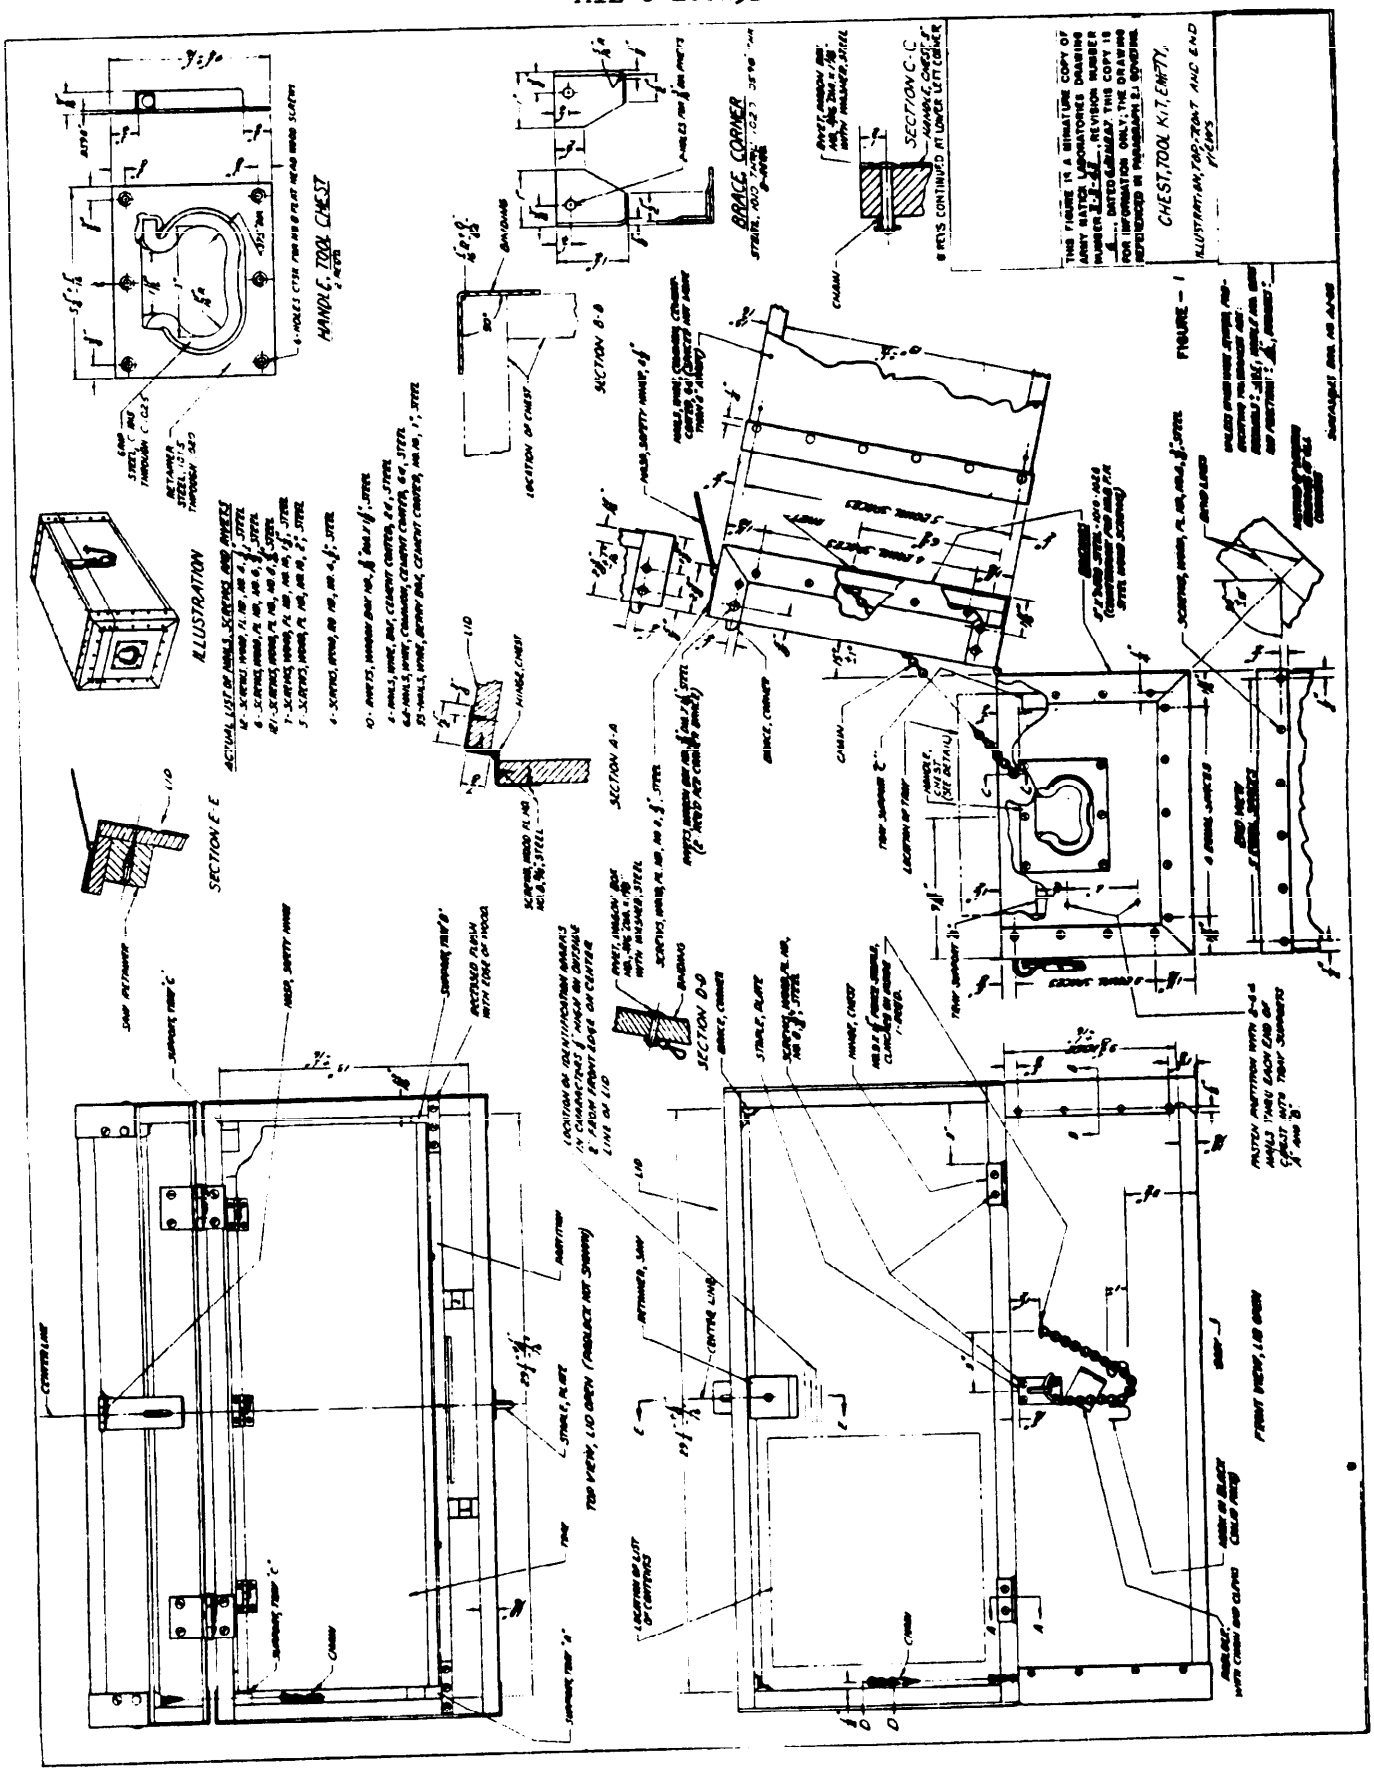

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:21Z
Check the source to verify that this is the currentversion before use.

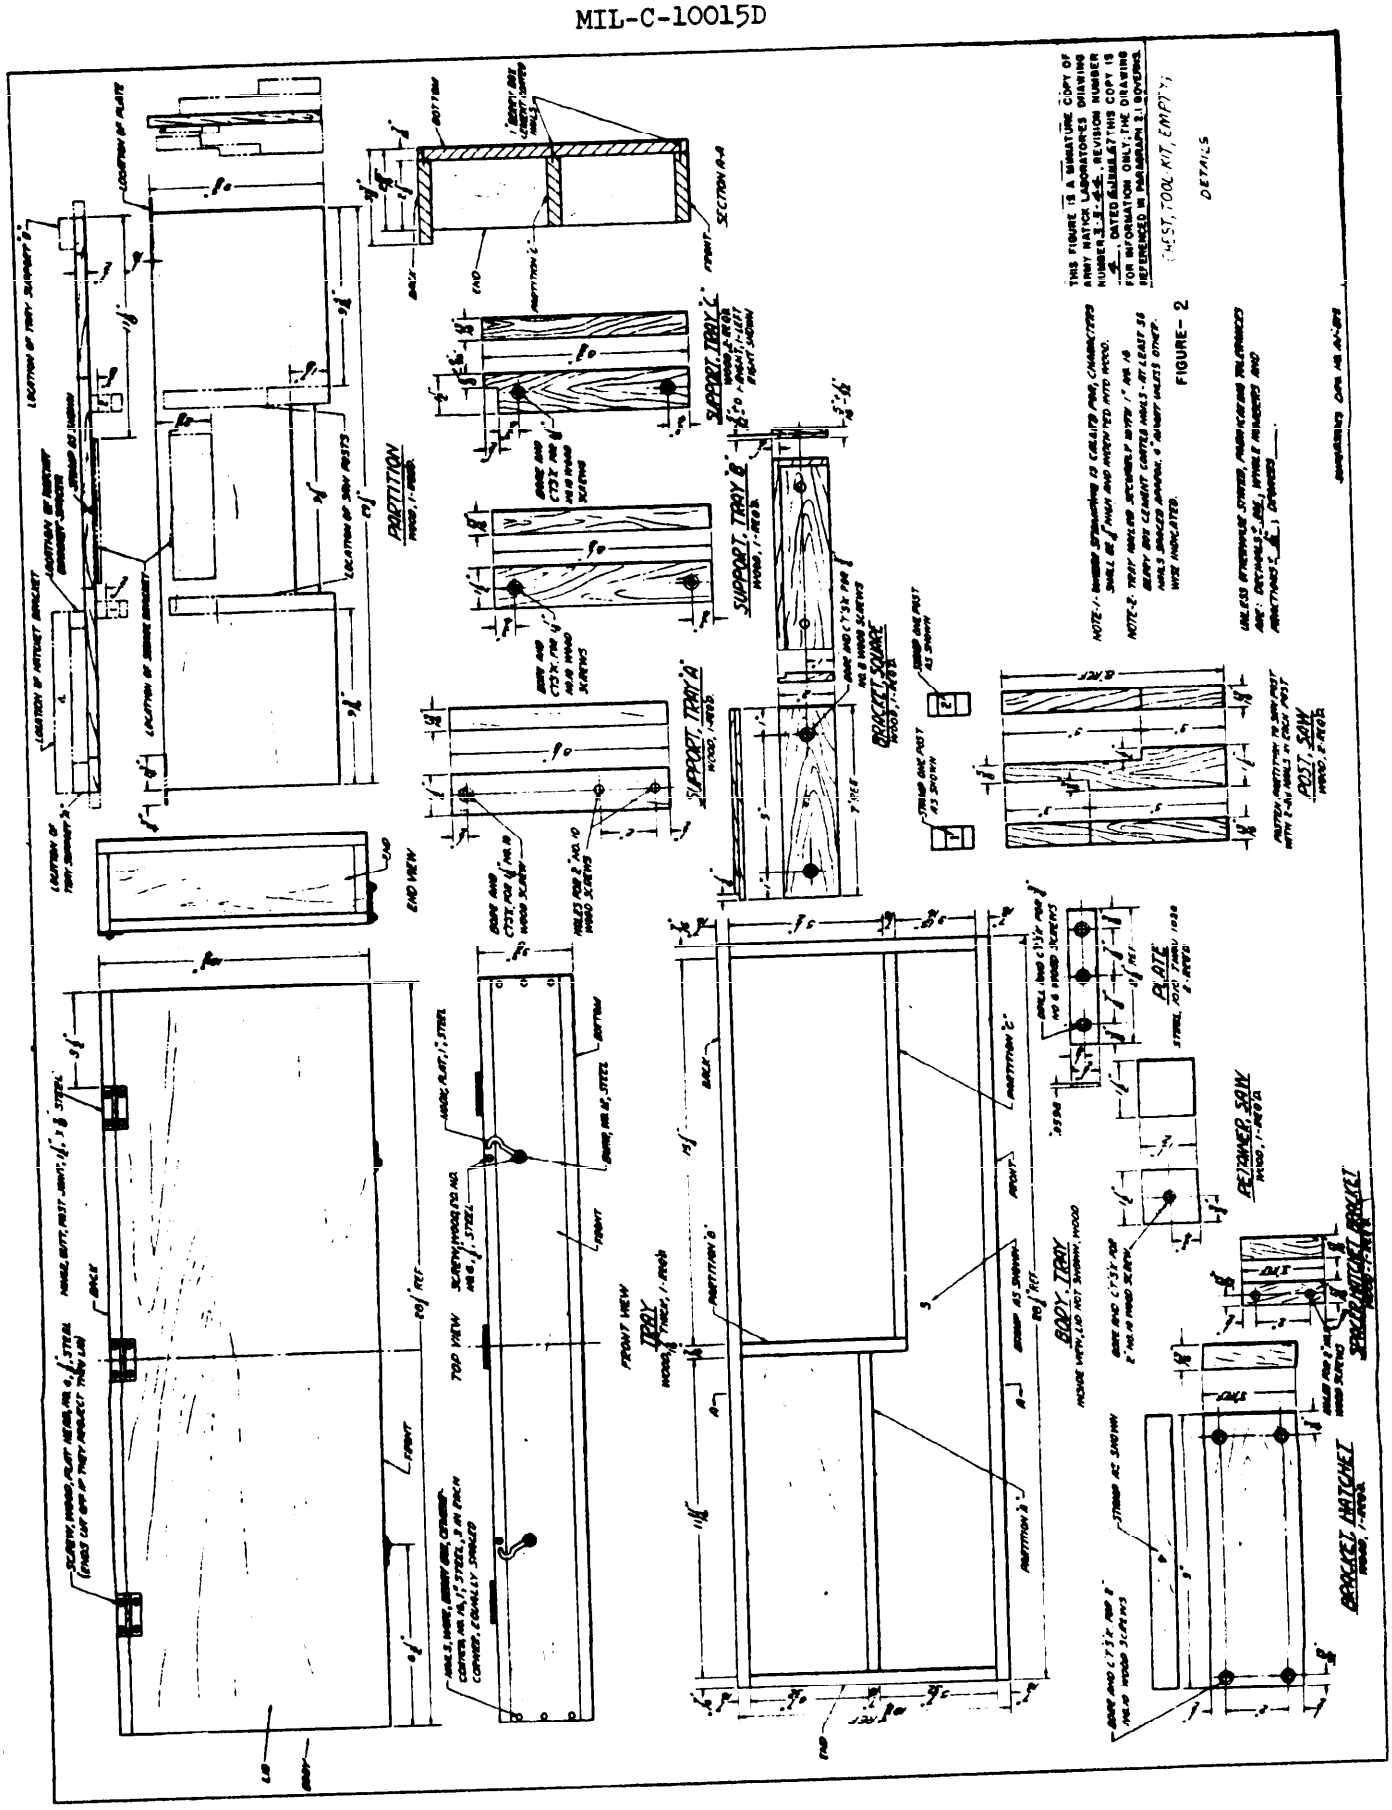


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:21Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-10015D Chest, Tool Kit, Empty

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and
Development Command
ATTN: DRDNA -ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:21Z
Check the source to verify that this is the current version before use.