MILITARY SPECIFICATION

CARDS, COPY

This specification has been approved by the Department of Defense and is mandatory for use by the Department of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers copy cards (see 6.2.1) to be used to reproduce microfilm images from aperture cards.

1.2 **Classification.** Copy cards shall be of the following types, classes and styles:

Type II—Diazo-type microfilm.
- Class 1—Sensitized Surface of Microfilm on Back.
  - Style A—Thickness buildup not more than .0002 inch.
  - Style B—Thickness buildup more than .0002 but not more than .0055 inch.
- Class 2—Sensitized Surface of Microfilm on Face.
  - Style A—Thickness buildup not more than .0002 inch.
  - Style B—Thickness buildup more than .0002 but not more than .0055 inch.

Type III—Heat-developing microfilm.
- Class 1—Sensitized Surface of Microfilm on Back.
  - Style A—Thickness buildup not more than .0002 inch.
  - Style B—Thickness buildup more than .0002 but not more than .0055 inch.
- Class 2—Sensitized Surface of Microfilm on Face.
  - Style A—Thickness buildup not more than .0002 inch.
  - Style B—Thickness buildup more than .0002 but not more than .0055 inch.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL	
G-C-116	Cards; tabulating
L-F-315	Direct Positive, (Diazo-type microfilm)
L-F-320	Film, Photographic, Heat Developing (Microfilm 35mm)
PPP-B-636	Box, Fiberboard
MILITARY	
MIL-P-116	Preservation, Methods of
MIL-L-10547	Liners, Case, Waterproof

STANDARDS

MILITARY	
MIL-STD-105	Sampling Procedures

FSC EDMS

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

and Tables for Inspection by Attributes

MIL-STD-129 Marking for Shipment and Storage

MIL-STD-804 Formats and Coding of Tabulating and Aperture Cards for Engineering Data Micro-Reproduction System.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer. Both the title and number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Types. Type II copy cards shall contain unexposed and unprocessed Type I, Class B microfilm in accordance with Specification L-F-315. Type III copy cards shall contain unexposed and unprocessed Class B microfilm in accordance with Specification L-F-320.

3.2 Classes. As specified by the procuring activity, copy cards shall be furnished as either Class 1 or Class 2. Class 1 copy cards shall have the sensitized surface of the microfilm on the back of the card. Class 2 copy cards shall have the sensitized surface of the microfilm on the face of the card.

3.3. Styles. Style A copy cards shall have a thickness buildup of not more than .0002 inch. Style B copy cards shall have a thickness buildup of more than .0002 but not more than .0055 inch. The thickness buildup of a copy card is the difference between the total thickness of the laminate of card, microfilm carrier (when applicable), plus microfilm and the thickness of the card alone. The thickness buildup shall not extend outside the buildup area rectangle shown in figure 1.

3.4 **Card stock.** Card stock shall be Type I per Specification G-C-116. Unless otherwise specified by the procuring activity, the color of the card stock shall be in accordance with Standard MIL-STD-804.

3.4.1 *Edge coating.* The top and bottom edges of the card shall be thoroughly coated. The coating shall be composed of 25 percent vinyl acetate and 75 percent toluol.

3.5 **Card size.** Card size shall be in accordance with figure 1.

3.6 **Card thickness.** The thickness of the card alone shall be .0070 inch plus or minus .0004 inch.


3.7 **Card formats.** The formats of the copy cards shall be in accordance with Standard MIL-STD-804, except that a general purpose card format not in Standard MIL-STD-804 may be used for intra-activity, expendable, reference purposes. Card corner cut and card striping shall be in accordance with Standard MIL-STD-804, except that a general purpose card format not in accordance with Standard MIL-STD-804 used for intra-activity, expendable, reference purposes need not have the card corner cut. When classified information is depicted, the security marking requirements of Standard MIL-STD-804 shall apply.

3.8 **Rectangular hole.** The rectangular hole in the card shall include not less than the printing area rectangle shown in figure 1. The rectangular hole shall not extend outside the buildup area rectangle shown in figure 1.

3.9 **Sensitized surface of microfilm.** The unobstructed sensitized surface of the microfilm shall cover not less than the printing area rectangle shown in figure 1. The microfilm shall be attached to the card so as to permit sensitized surface to sensitized surface contact printing of the microfilm over the entire printing area rectangle shown in figure 1. The microfilm and the microfilm carrier (when applicable) shall not extend outside the buildup area rectangle shown in figure 1.

3.10 **Adhesion.** The adhesion of the microfilm to the microfilm carrier, or of the microfilm to the card stock, shall pass the 10 gram

Source: https://assist.dla.mil -- Downloaded: 20260-17T13:15Z
Check the source to verify that this is the current version before use.

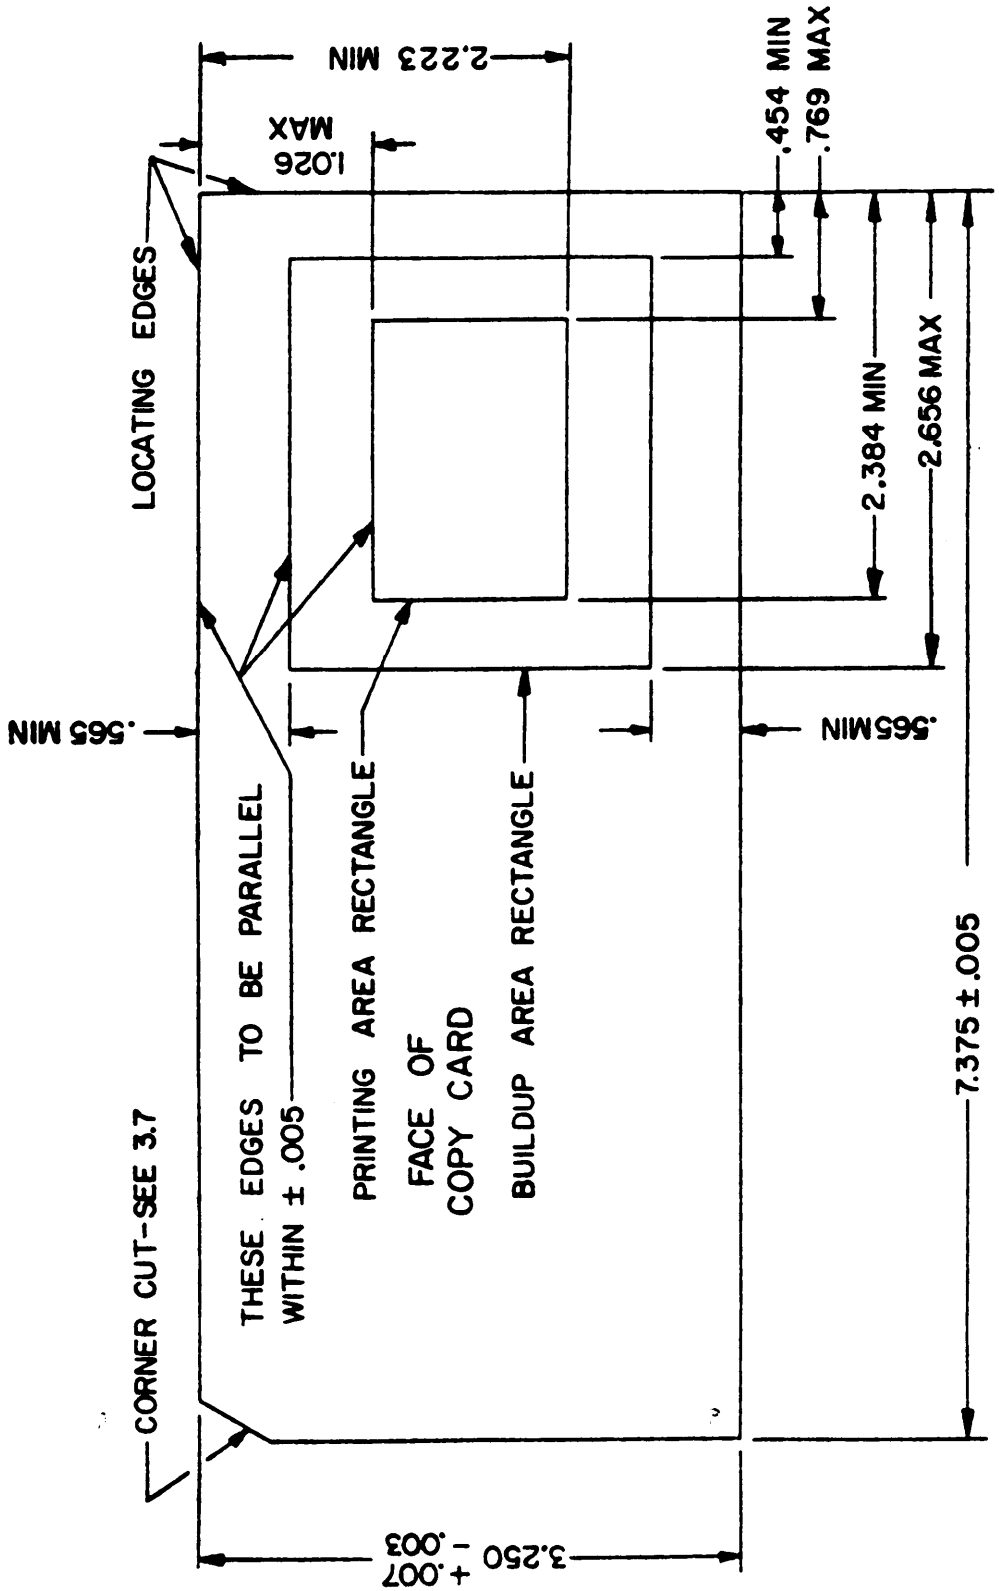

THICKNESS OF CARD ALONE .0070 ± .0004.
PLANE OF SENSITIZED SURFACE OF MICROFILM WILL BE ON BACK
OF SOME CARDS AND ON FACE OF OTHERS.

FIGURE 1. *Copy card layout.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

weight test of 4.8 both before and after processing the microfilm.

3.11 **Non-blocking.** The non-blocking characteristics of the copy cards shall pass the non-blocking test of 4.9 both before and after processing of the microfilm.

3.12 **Workmanship.** Copy cards shall be clean, free from nicks, folds, bent corners, torn corners, or other card damage that might affect punched card accounting machine processing. All printed data shall be legible and unsmeared. The sensitized surface of the microfilm shall exhibit no scratches, tears, fingerprints, or other defects that might affect quality of reproductions made thereon.

3.13 **Protection.** Copy cards containing unexposed microfilm shall be protected from light and unsuitable environmental conditions in accordance with the recommendations of the card supplier and the microfilm manufacturer during manufacture, inspection, shipment and storage. Copy cards that have been exposed to light or other unsuitable environmental conditions beyond those recommended by the card supplier and the microfilm manufacturer shall not be delivered on contract or order.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 **Classification of inspection.** Inspection shall be classified as follows:

a. Acceptance inspection of items before preparation for delivery (see 4.3).

b. Acceptance inspection of preparation for delivery (see 4.4 and section 5).

4.3 **Acceptance inspection of items before preparation for delivery.** The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified below. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records.

4.3.1 *Inspection of copy cards.* This inspection (including sampling) shall conform to table I and Standard MIL-STD-105.

TABLE I. *Inspection of copy cards*

Inspection	Requirement Para.	Inspection Para.	AQL	Insp Level
Thickness build up	3.3	4.5	3 copy cards per lot	
Dimensions	3.5	4.6	Major .40 dphu	
	3.6		Minor 1.0 dphu	L-5
	3.8			
	3.9			
Adhesion before processing	3.10	4.8	.65 dphu	L-5
Non-blocking before processing	3.11	4.9		
Visual before processing	3.12	4.10	.65%	II
Adhesion after processing	3.10	4.14	.65 dphu	L-5
Non-blocking after processing	3.11	4.13		
Visual after processing	3.12	4.12	.65%	L-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

4.4 Acceptance inspection of preparation for delivery. The contractor, to demonstrate compliance with specified requirements, shall perform the inspection specified by 4.4.1 and 4.4.2. This does not relieve the contractor of his responsibility for performing any additional inspection which is necessary to control the quality of the product and to assure compliance with all specification requirements. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records.

4.4.1 *Preservation and packaging.* Preservation and packaging shall be inspected in accordance with Specification MIL-P-116. Classification of defects shall be as shown in table II.

TABLE II. *Classification of defects for preservation, packaging and marking*

Major	Minor
1. Use of improper or defective material.	1. Item not properly blocked or braced within the unit package to prevent movement.
2. Quantity in Unit package not as specified.	2. Packaging material damaged.
3. Incorrect packaging method applied.	3. Any item of marking information other than 4 through 6 listed under major defects omitted, incorrect, or illegible.
4. Contract or order number omitted, incorrect, or illegible.	
5. Identification omitted, incorrect or illegible.	
6. Marking of quantity of items in package omitted, incorrect or illegible.	

4.4.2 *Packing and marking of exterior containers.* Packing and marking of exterior containers shall be given visual inspection in accordance with table III, to determine conformance to section 5 and the approved process sheet (see contract). This inspection shall conform to the special procedure for small-sample inspection of Standard MIL-STD-105. Inspection Level L-7 shall be used for normal inspection and L-5 for reduced inspection. The reduced inspection procedure shall be R-1.

Note. Other statistical sampling procedures may be employed if approved by the contracting officer.

(a) *Major defect.* For sample sizes up to 10 inclusive, as determined by reference to Standard MIL-STD-105, each sample size as given shall be used for these sample sizes the acceptance number shall be zero. For sample sizes greater than 10 the acceptance number shall be determined by the AQL of 4.0 percent defective.

(b) *Minor defects.* For sample sizes up to 5 inclusive, as determined by reference to Standard MIL-STD-105, each sample size as given shall be used and for these sample sizes the acceptance number shall be zero. For sample sizes greater than 5 the acceptance number shall be determined by the AQL of 10.0 percent defective.

TABLE III. *Classification of defects for packing and marking*

Major	Minor
1. Use of improper or defective material.	1. Defective taping or sealing of carton.
2. Quantity in pack not as specified.	2. Any other box defect which may be considered minor by definition of Standard MIL-STD-105.
3. Gross weight in excess of specified.	3. Any item of required marking information other than 8 through 14 listed under major defects omitted, incorrect, or illegible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

Major	Minor
4. Box closure not as specified. 5. Type, grade, class, and style of the shipping container not as specified. 6. Items not adequately blocked, braced, or cushioned within the shipping container to prevent movement or damage. 7. Shipping documents or packing list omitted. 8. Contract or order number omitted, incorrect, or illegible. 9. Identification omitted, incorrect, or illegible. 10. Marking of quantity of items in pack, omitted, incorrect or illegible. 11. Destination marking omitted, incorrect, or illegible 12. Service designation (color marking) omitted. 13. Special marking or labeling (when required) omitted. 14. Overseas code marking omitted, incorrect, or illegible. 15. Unsealed carton.	

4.4.2.1 *Inspection lot.* A lot for visual inspection of the pack shall be all completed packs which are identical and will be submitted for acceptance at one time.

4.4.2.2 *Procedure in case of failure.* When an inspection lot fails, the contractor shall immediately investigate the cause of failure and take corrective action to assure that subsequent lots do not contain the same defect or defects.

4.4.2.3 *Disposition of nonconforming product.* Disposition of nonconforming product shall conform to Standard MIL-STD-105. Such product shall be suitably tagged or identified to indicate the cause of failure and means employed to correct the fault. The required information shall be presented to the Government when the product is submitted.

4.5 **Thickness buildup test.** The thickness of the laminate of card, microfilm carrier (when applicable) plus microfilm shall be measured on each card in the sample at a place selected without regard to quality, along a side of the rectangular opening in the card. If the thickness of the laminate exceeds the thickness of the card stock by more than the amount specified in 3.3, it shall be counted as a defect. If there are two or more defects for this test in an inspection lot, the lot shall be rejected.

4.6 **Dimensional inspection.** The card dimensions listed below shall be gaged or measured to determine conformance to requirements of 3.5, 3.6, 3.8 and 3.9. When a listed dimension is not within specified limits, it shall be considered a major or minor defect as indicated.

(a) 3.250" +.007, −.003" (major)
(b) 7.375" ± .005" (major)
(c) Thickness of card alone .0070" ± .0004" (major)
(d) 1.026" max. (major)
(e) 2.223" min. (major)
(f) .769" max. (major)
(g) 2.384" min. (major)
(h) .565" min. (minor) (2 places)
(i) .454" min. (minor)
(j) 2.656" max. (minor)
(k) Upper left corner cut ¼" along top edge of card (minor) (when applicable)
(l) Upper left corner cut ⅜" along left edge of card (minor) (when applicable)

4.7 **Conditioning.** The sample shall be conditioned, loosely assembled at a temperature of 70° F., ± 3° F., and at a relative humidity of 50 percent, ± 10 percent, for the specified period.

4.8 **Adhesion test.** The sample shall be stored at a temperature of 70° F., ± 3° F.,

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

and at a relative humidity of 50 percent, ± 10 percent, for at least 6 hours with a weight of eleven pounds placed on the aperture area. The sample shall then be conditioned in accordance with 4.7 for a period of 6 hours. After conditioning, the peel of the microfilm from the microfilm carrier, or of the microfilm from the card stock, as applicable, shall be not more than one-half inch in one minute with a 10 gram weight suspended on the microfilm carrier or on the microfilm, as applicable, when tested as indicated below. Cards subjected to this test shall not be delivered on contract or order.

4.8.1 The equipment for this test shall include (*a*) a card suspension rack with adjustable scale, (*b*) the appropriate calibrated weight with alligator clip, and (*c*) a stop watch. The card suspension rack shall be a vertically arranged clip board in which the center portion has been cut out to allow unimpeded drop of the weight during the test. The scale shall be a one inch wide metal strip mounted on a vertical post to allow for vertical adjustment. The weight shall be brass, attached by a solid wire, to a small alligator clip. The body of the weight shall be cylindrical and shall have provision for calibration through the addition or removal of solder. Calibration shall be to the nearest .001 gram of the weight specified for the test. The lower end of the weight shall be flat and at a right angle with the side of the cylinder. Cards, after visual inspection in accordance with 4.10 and the specified conditioning, shall be tested as follows:

4.8.1.1 Slit the full length of the microfilm or the microfilm carrier, as applicable, parallel to the long edge of the rectangular opening adjacent to the edge of the opening.

4.8.1.2 Peel back the microfilm or the microfilm carrier from the corner of the opening towards the 80 column end of the card, approximately 1/4 to 3/8 inch.

4.8.1.3 Suspend the prepared card in the rack with the opening down, the side under test away from the board, and the top edge of the card against the base of the card clip.

4.8.1.4 Attach the weight, by means of the alligator clip, to the peeled back portion of microfilm or the microfilm carrier.

4.8.1.5 Gently release the weight and adjust the scale so that the lower end of the weight will be in line with the top edge of the scale.

4.8.1.6 When the weight is at rest and in line with the top edge of the scale, start the stop watch.

4.8.1.7 Observe the position of the weight after one minute has elapsed. The item under test shall be considered a defect if the weight has dropped so that its lower end has passed the bottom edge of the scale.

4.8.2 Cards subjected to this test shall not be delivered on contract or order.

4.9 **Non-blocking test.** The sample for this test shall consist of a consecutive group of cards of the sample size "n" in accordance with Standard MIL-STD-105 selected without regard to quality. The sample shall be conditioned in accordance with 4.7 for a period of 24 hours before testing. The sample then shall be stored for a period of 24 hours at a temperature of 115° F., ± 5° F., under a weight of 11 pounds placed on the aperture area. It shall then be reconditioned in accordance with 4.7 for a period of 6 hours. The sample then shall be fanned and compared for ease of fanning with the fanning of a like number of tabulating cards. Each individual card shall separate from its adjacent card without card-to-card adhesion due to copy card manufacture. Each two cards that adhere together shall be counted as a defect. Cards subjected to this test shall not be delivered on contract or order.

4.10 **Visual inspection before processing.** The copy cards shall be inspected for the defects listed below:

(a) Card edge is visibly nicked.
(b) Card is torn.
(c) Card is folded or creased.
(d) Corner of card is bent.
(e) Rectangular hole does not include at least the printing area rectangle shown in figure 1.
(f) Rectangular hole extends outside

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

buildup area rectangle shown in figure 1.

(g) Microfilm carrier intrudes into printing area rectangle shown in figure 1 (when applicable).
(h) Microfilm carrier extends outside buildup area rectangle shown in figure 1 (when applicable).
(i) Microfilm is not completely bonded to card or to microfilm carrier.
(j) Sensitized surface of microfilm does not at least cover printing area rectangle shown in figure 1.
(k) Sensitized surface of microfilm covered or coated within printing area rectangle shown in figure 1, which would prevent sensitized surface to sensitized surface contact when printing.
(l) Microfilm extends outside buildup area rectangle shown in figure 1.
(m) A scratch is on sensitized surface of microfilm within printing area rectangle shown in figure 1.
(n) Format of card is incorrect.
(o) Corner cut is incorrect (when applicable).
(p) Color of card is incorrect.
(p) Color of stripe is incorrect (when applicable).
(r) Stripe is in wrong position (when applicable).

4.11 Processing. The sample shall be processed in accordance with the instructions of the microfilm manufacturer. The sample shall then be stored under ambient conditions for 15 minutes.

4.12 Visual inspection after processing. The sample shall be processed in accordance with 4.11. It shall be inspected for the defects listed below:

(a) Microfilm is not bonded firmly to microfilm carrier, or microfilm is not bonded firmly to card stock, as applicable.
(b) Card damaged by environment required to process microfilm.
(c) Microfilm carrier damaged by environment required to process microfilm (when applicable).
(d) Color of card permanently changed by environment required to process microfilm (change still evident more than 15 minutes after processing).
(e) Color of stripe permanently changed by environment required to process microfilm (change still evident more than 15 minutes after processing).

4.13 Non-blocking test after processing. After visual inspection in accordance with 4.12, the sample shall be tested in accordance with 4.9.

4.14 Adhesion test after processing. After testing in accordance with 4.13, the sample shall be tested in accordance with 4.8.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Level A.* Cards, Copy shall be packaged and tested in accordance with the procedures specified for the designated methods as prescribed in Specification MIL-P-116 and as described herein.

5.1.1.1 *Unit packaging.* Cards, Copy shall be packaged Method III as follows: Each unit deck shall be placed within a close-fitting, one-piece special folding design, Type I, Class 1, fiberboard box conforming to table I of Specification PPP-B-636. When the cards do not completely fill the box, spacers, the size of the cards and fabricated of corrugated fiberboard equal to the strength of the box material, shall be placed behind the cards in sufficient numbers as to entirely fill voids, and keep cards under pressure equivalent to normal follower block pressure of a card file drawer, to prevent card curl.

5.1.2 *Level C.* Cards, Copy shall be packaged in accordance with commercial practice and in a manner that will afford protection against corrosion, deterioration and physical damage during direct shipment to the first receiving activity.

5.2 Packing. Packing shall be Level A, B, or C as specified in the contract or order (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

5.2.1 *Level A.* Five unit packages, packaged as specified in 5.1.1.1 shall be placed within a close-fitting regular slotted style, Type I Class 2, W5c fiberboard box conforming to Specification PPP-B-636. Box closure shall be in accordance with the referenced box specification. Each fiberboard box shall be provided with Type I or Type II, Grade B, Class 2 case liner conforming to the requirements of Specification MIL-L-10547.

5.2.2 *Level B.* Five unit packages, packaged as specified in 5.1.1.1 shall be placed within a close-fitting regular slotted style, Type I, Class 1, fiberboard box conforming to table I of Specification PPP-B-636. Closure shall be in accordance with referenced box specification.

5.2.3 *Level C.* Cards packaged as specified in 5.1.2 shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall conform to carrier rules and regulations applicable to the mode of transportation.

5.3 Marking. Interior packages and exterior shipping containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents shall specify the following:

(a) Title, number and date of this specification.
(b) Types, classes and styles of cards required (see 3.1, 3.2 and 3.3).
(c) Format of cards required (see 3.7).
(d) Delivery date and destination(s) for cards.
(e) Level of protection (see section 5).
(f) Corner cut (see 3.7).
(g) Color and position of stripe (see 3.7).
(h) Color of card stock (see 3.4).

6.2 Definitions.

6.2.1 *Copy card.* A copy card is a tabulating card with a frame of unexpected and unprocessed microfilm mounted in or over a rectangular hole for subsequent exposure and development while still mounted in the card.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN:
ARMY—EL
NAVY—BuWeps
AIR FORCE—AFLC

PREPARING ACTIVITY:
EL

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDING OFFICER
U.S. ARMY ELECTRONICS COMMAND
ATTN: AMSEL-TD-S
FORT MONMOUTH, N.J. 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.