INCH-POUND

MIL-S-9968C(IP)
AMENDMENT 1
16 September 1991

MILITARY SPECIFICATION

SKID , COMPONENTS, DOD REUSABLE

This amendment forms a part of MIL-S-9968C(IP), dated 26 September 1990, and is approved for use by all Departments and Agencies of the Oepartment of Defense.

The attached insertable replacement pages listed below are replacements for stipulated pages. When the new pages have been entered in the document, insert the amendment as the cover sheet to the specification.

Replacement page	Page replaced
4	4
5	5

PAGE 7

TABLE I: Delete cumulative tolerance heading and substitute:

"Cumulative tolerance, extreme square hole (end to end) longitudinal spacing ± not more than, inches"

PAGE 8

TABLE II: Delete cumulative tolerance heading and substitute:

"Cumulative tolerance, extreme elongated hole (end to end) longitudinal spacing, ± not more than, inches"

PAGE 9

3.4.1, line 7: Delete and substitute

"The holes shall be longitudinally spaced on 2.333 inch centers within a tolerance of 0.010 inch non-cumulative for each hole."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:17Z
Check the source to verify that this is the current version before use.

3.4.2, line 5: Delete and substitute:

"The holes shall be longitudinally spaced on 2.333 inch centers within a tolerance of ± 0.010 inch non-cumulative for each hole."

3.5.1, line 5, legend: Delete and substitute:

"U.S. GOVERNMENT PROPERTY - REUSABLE SKID - DO NOT DESTROY -
DO NOT PUSH ON CONCRETE FLOORS."

Custodian:
DLA - IP

Review activity:
DLA - GS

Preparing activity:
DLA - IP

(Project 3990-0220)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:17Z
Check the source to verify that this is the current version before use.



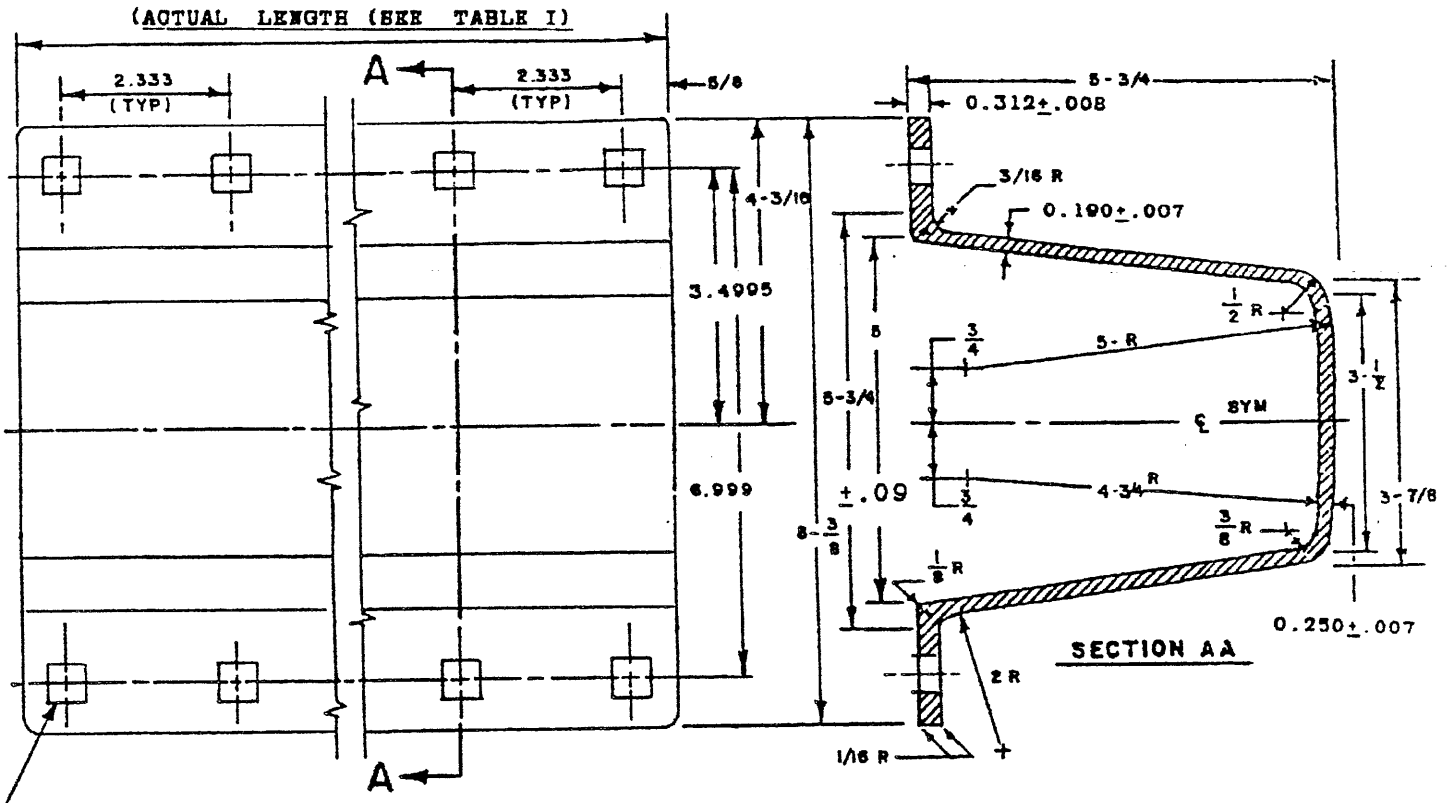


FIGURE 1- RUNNER/ HEADER BEAM.

Punch the number of 9/16 inch square holes specified by table I in each flange for the part number required. The holes shall be longitudinally spaced on 2.333 inch centers within a tolerance of ± 0.010 inch, non-cumulative for each hole. Measurements for extreme hole locations (ends of components) shall not exceed the cumulative tolerance specified in table I. Holes in flanges shall be in line with corresponding holes of opposite flanges within ±0.015 inch.

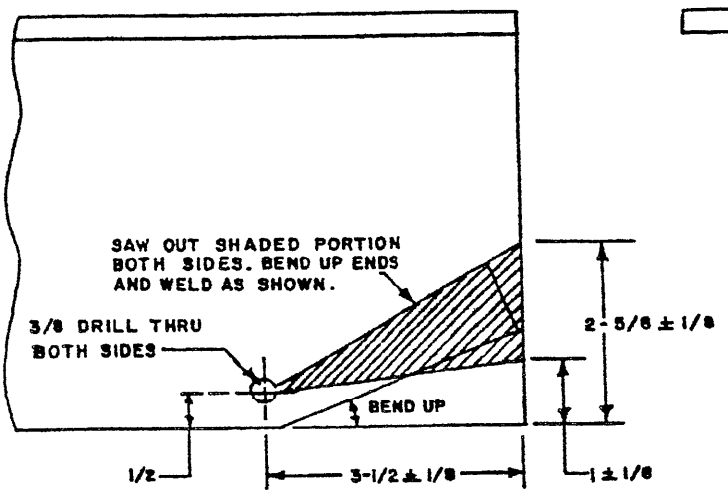

END DETAIL

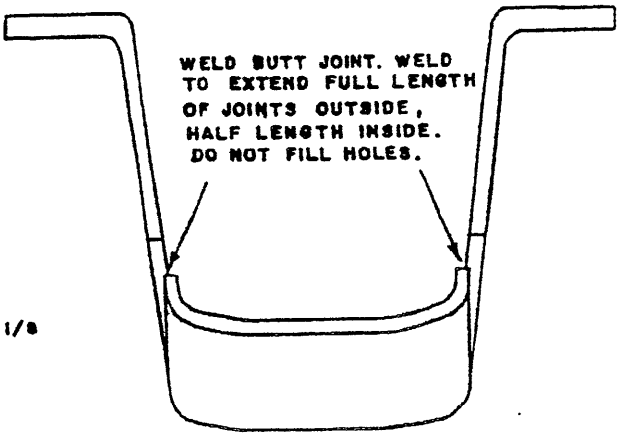


Note: All dimensions in inches.

TOLERANCES UNLESS OTHERWISE NOTED


FRACTIONAL	PLUS OR MINUS 1/16
DECIMAL	.XXX, ±.005
	.XX , ±.015
	.X , ±.050

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:17Z
Check the source to verify that this is the current version before use.

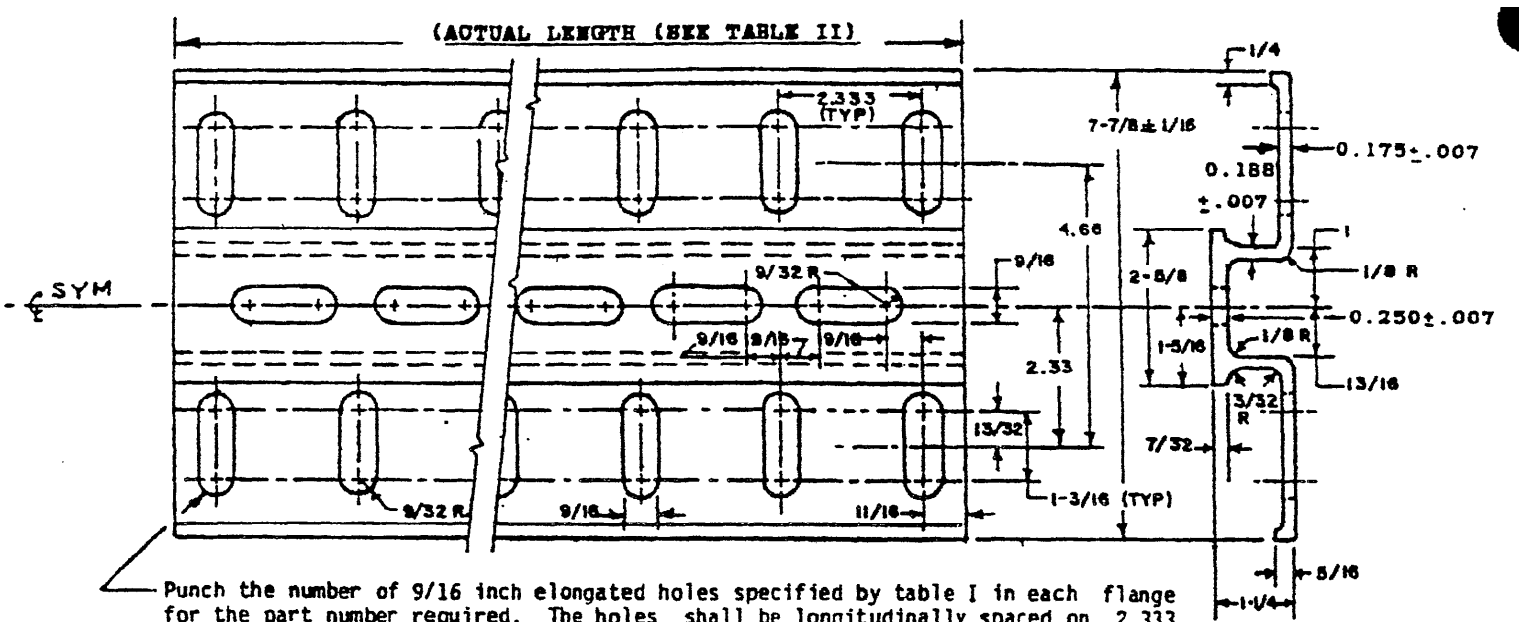

Punch the number of 9/16 inch elongated holes specified by table I in each flange for the part number required. The holes shall be longitudinally spaced on 2.333 inch centers within a tolerance of ±0.010 inch, non-cumulative for each hole. Measurements for extreme hole locations (ends of components) shall not exceed the cumulative tolerance specified in table II. Holes in flanges shall be in line with holes of opposite flanges within ±0.015 inch.

FIGURE 2 AUXILIARY TIE BAR.

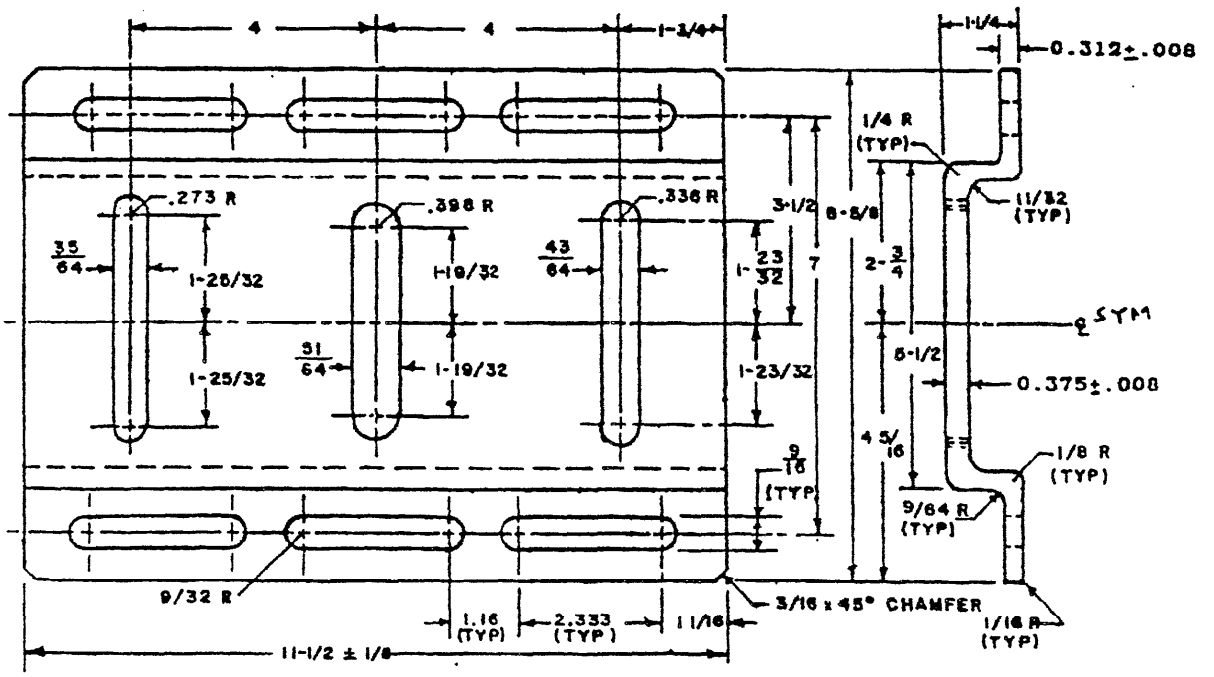

Note: All dimensions in inches.

TOLERANCES UNLESS OTHERWISE NOTED:

FRACTIONAL	PLUS OR MINUS 1/16
DECIMAL	.XXX, ±.005
	.XX , ±.015
	.X , ±.030

FIGURE 3. MOUNTING PLATE.

NOTE: 11-1/2" long plate shown. For 10" long plate, (see table III).

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:17Z
Check the source to verify that this is the current version before use.