MILITARY STANDARD

MIL-STD-1323-347
(NAVY)
9 JANUARY 1990

UNIT LOAD
FOR UNDERWAY REPLENISHMENT
GUIDED MISSILE, AGM-65 (MAVERICK)
IN CONTAINER, SHIPPING AND STORAGE,
CNU-399/E OR CNU-472/E

UNIT LOAD DATA

NUMBER OF MISSILES PER CONTAINER 1
NUMBER OF CONTAINERS PER UNIT LOAD 2
GROSS WEIGHT OF ONE CONTAINER . . . . . 1020 LBS
WEIGHT OF STEEL STRAPPING . . . . . 4 LBS
GROSS WEIGHT OF UNIT LOAD . . . . . 2044 LBS △
CUBE . . . . . 118 CU FT

△ DO NOT USE FOR SHIPPING WEIGHT


DO NOT STACK MORE THAN
3 UNIT LOADS HIGH IN STORAGE.

SHIPPING AND STORAGE CONTAINER, CNU-399/E
OR
SHIPPING AND STORAGE CONTAINER, CNU-472/E

CONTAINER DIMENSIONS

LENGTH 110
WIDTH 32
HEIGHT (OVERALL) . . . 29.7
(STACKING) . . . 28.7

HAZARD CLASSIFICATION			
DODIC/NALC	ITEM NAME	DOT	CG
PB69	MISSILE	CLASS A	CLASS X-C

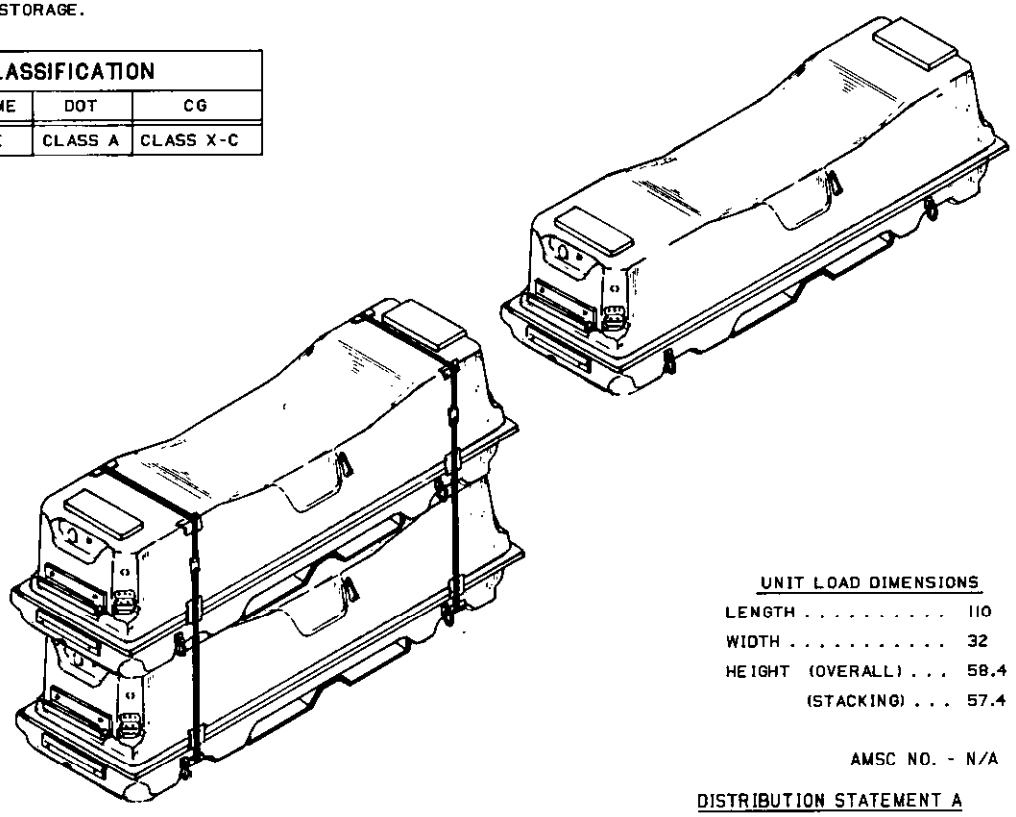

UNIT LOAD DIMENSIONS

LENGTH 110
WIDTH 32
HEIGHT (OVERALL) . . . 58.4
(STACKING) . . . 57.4

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

REV LTR	REVISION DESCRIPTION	DATE	TDA	SYSCOM
			APPROVAL	

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

E. Ruiz 1-10-90
SIGNATURE TDA, WPNSTA EARLE DATE

1/11/90
SIGNATURE SEASYSCOM BY DIRECTION DATE

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR G Bender 1/8/90
DATE

WPNSTA EARLE, NEW JERSEY


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

UNITIZING PROCEDURES

1. PLACE ONE CONTAINER ON TOP OF THE FIRST CONTAINER MAKING SURE TO ALIGN THE STACKING FEATURES.
2. THREAD TWO STEEL STRAPS (ITEM 1) THROUGH THE OPENINGS IN THE FWD AND AFT ENDS OF THE CONTAINER AS SHOWN.
3. TENSION AND DOUBLE NOTCH THE SEALS (ITEM 2).

WARNING

WHEN LOADING OR UNLOADING TRAILERS WITH UNITIZED CONTAINERS,EXTRA CAUTION SHOULD BE TAKEN TO PREVENT TOPPLING. SPECIAL ATTENTION SHOULD BE GIVEN TO APPROPRIATE BACKUP OF OUTBOARD CONTAINERS.

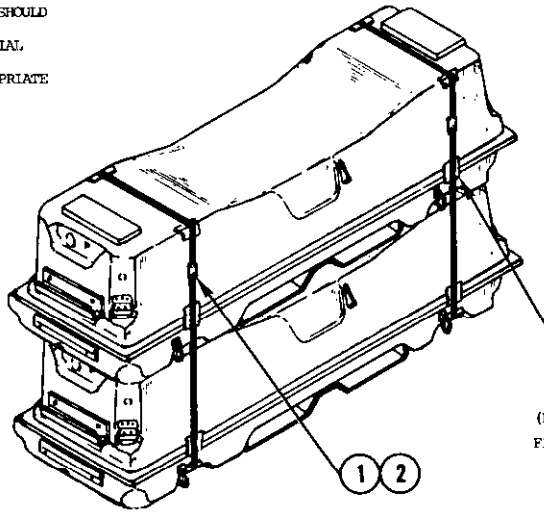

(REF EDGE PROTECTORS).
FIBERBOARD OR EQUIV.

DE-UNITIZING PROCEDURE

1. CUT AND REMOVE STRAPPING.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323 (NAVY).
2. DO NOT USE TYPE I STRAPPING WITH POWER TOOLS.

REQ'D	ITEM	DESCRIPTION	MAT'L/DWG	DIMENSIONS
2	2	SEALS	SEE NOTE 3	1 1/4
2	1	STRAPPING	SEE NOTE 2	1 1/4 X .035 X 15 FT 6 IN

LIST OF MATERIALS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T23:59Z
Check the source to verify that this is the current version before use.

☆U.S. GOVERNMENT PRINTING OFFICE: 1990 704-034/30389