# MILITARY STANDARD

**MIL-STD-1323-382**
**(NAVY)**

19 AUGUST 1992

## UNIT LOAD
## FOR UNDERWAY REPLENISHMENT
## RETARDER, INFLATABLE, AIR BSU-85/B IN SHIPPING AND STORAGE CONTAINER, FIN CNU-419 A/E,OR CNU-419 B/E

S/S/C #3347AS100 CNU-419 A/E WITH FIBERGLASS END CAPS

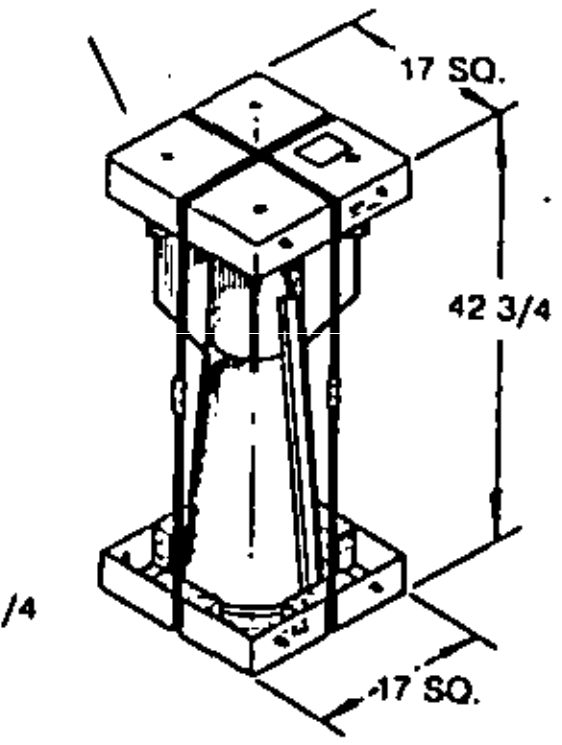

### UNIT LOAD DATA

| | |
|---|---|
| NUMBER OF RETARDERS/CONTAINER | 1 |
| GROSS WEIGHT OF ONE CONTAINER | CNU-419 A/E = 110.4 LBS.<br>CNU-419 B/E = 118 LBS. |
| NUMBER OF CONTAINERS/UNIT LOAD | 6 |
| WEIGHT OF STEEL STRAPPING | 4 LBS. |
| WEIGHT OF DUNNAGE | 9.5 LBS. |
| WEIGHT OF STEEL PALLET | 94 LBS. |
| GROSS WEIGHT OF UNIT LOADS | CNU-419 A/E = 769.9 LBS. △<br>CNU-419-B/E = 815.5 LBS. |
| CUBE OF UNIT LOADS | 49.83 CU. FT. |

△ DO NOT USE FOR SHIPPING WEIGHT

FOR HAZARD CLASSIFICATION SEE SW020-AC-SAF-010

DO NOT STACK MORE THAN 4 UNIT LOADS HIGH IN STORAGE

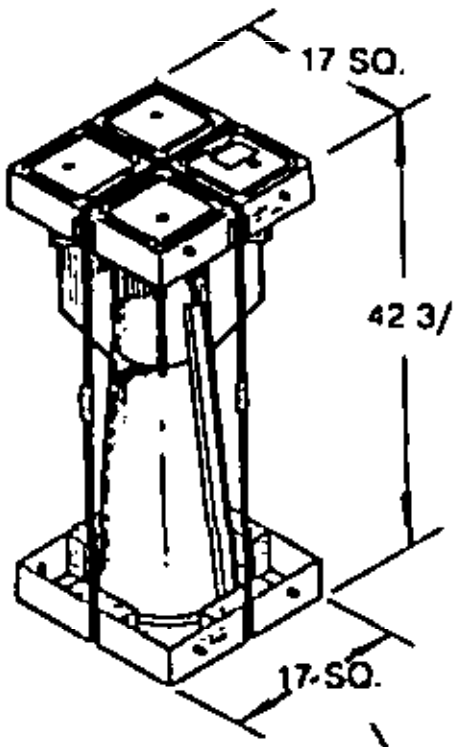

S/S/C #3347AS200 CNU-419 B/E WITH METAL END CAPS

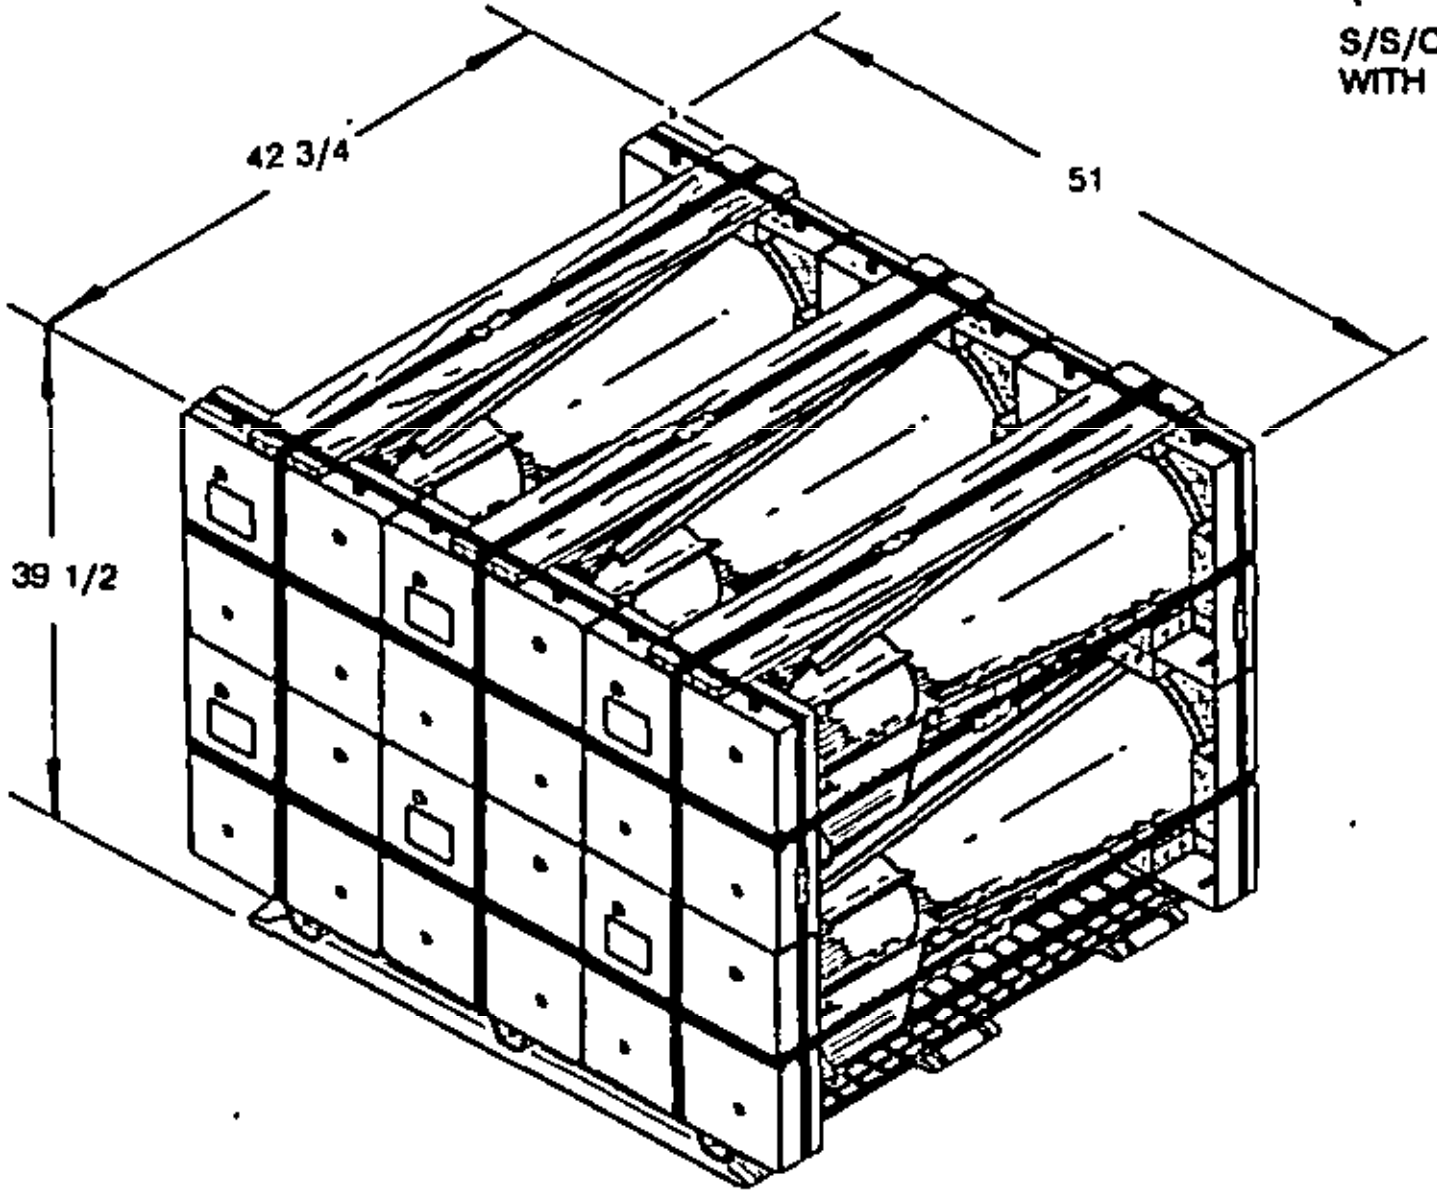

NOTE:

ALTHOUGH PICTURED HERE AND ON PAGE 2 IS A PALLETIZING LAYOUT FOR S/S/C CNU-419 A/E WITH FIBERGLASS END CAPS, THE SAME PROCEDURES APPLY FOR S/S/C CNU-419 B/E WITH METAL END CAPS.

AMSC NO. - N/A

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE: DISTRIBUTION IS UNLIMITED.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236 (NAVY).

| REV LTR | REVISION DESCRIPTION | DATE | TOA | SYSCOM |
|---|---|---|---|---|
| | | | APPROVAL | |

FSC 8140

**THIS UNIT LOAD IS AUTHORIZED AND RELEASED** FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

**REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).**

SIGNATURE TOA. WPNSTA EARLE DATE

SIGNATURE NAVAIRSYSCOM BY DIRECTION DATE

ORIGINATOR DATE

WPNSTA EARLE, NEW JERSEY

PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

## PALLETIZING PROCEDURE

(a) THREAD LONGITUDINAL STRAPPING, ITEM 2, BETWEEN DECK WIRES OF PALLET, ITEM 1, AS SHOWN IN DETAIL A.

(b) PLACE CONTAINERS ON PALLET WITH EQUAL OVERHANG ON BOTH SIDES AND ENDS, MAKING SURE THAT THE STACKING PINS ARE IN THE UP POSITION.

(c) PLACE PROTECTOR BOARDS, ITEM 5, ON CONTAINER IN APPROX. POSITIONS SHOWN.

(d) THREAD LATERAL STRAPPING, ITEM 3, THROUGH THE PALLET LEGS AND OVER THE UNIT LOAD AND PROTECTOR BOARDS, ITEM 5. TENSION AND DOUBLE NOTCH SEALS, ITEM 4.

(e) PLACE LONGITUDINAL STRAPPING, ITEM 2, AROUND UNIT LOAD AND OVER PROTECTOR BOARDS, ITEM 5. TENSION AND DOUBLE NOTCH SEALS, ITEM 4.

(f) STAPLE LONGITUDINAL STRAPPING, ITEM 2, WITH ONE STAPLE, ITEM 6, IN EACH CORNER AS SHOWN IN DETAIL B.

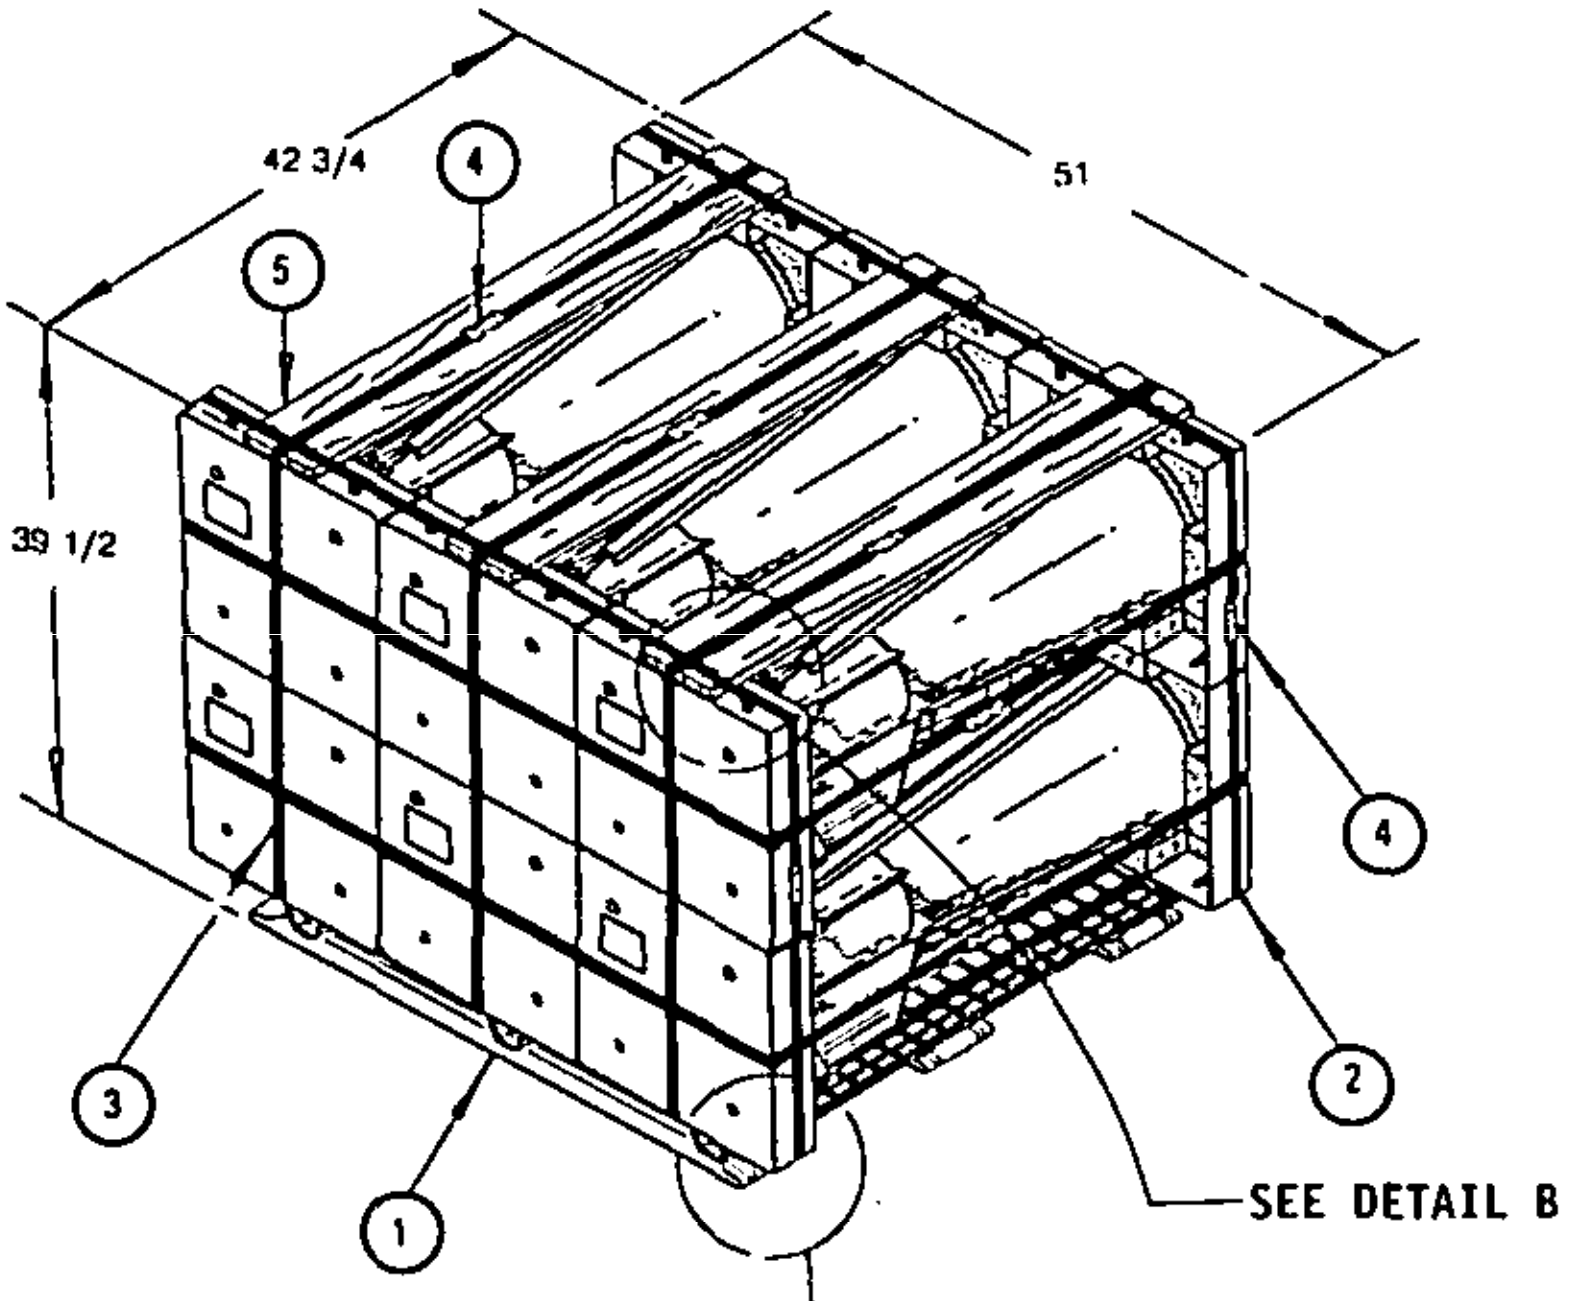

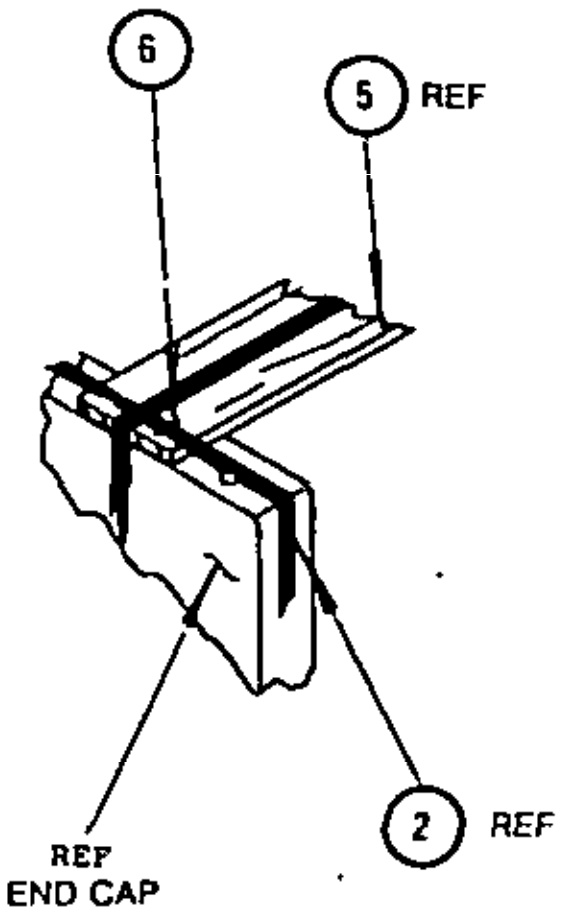

DETAIL B

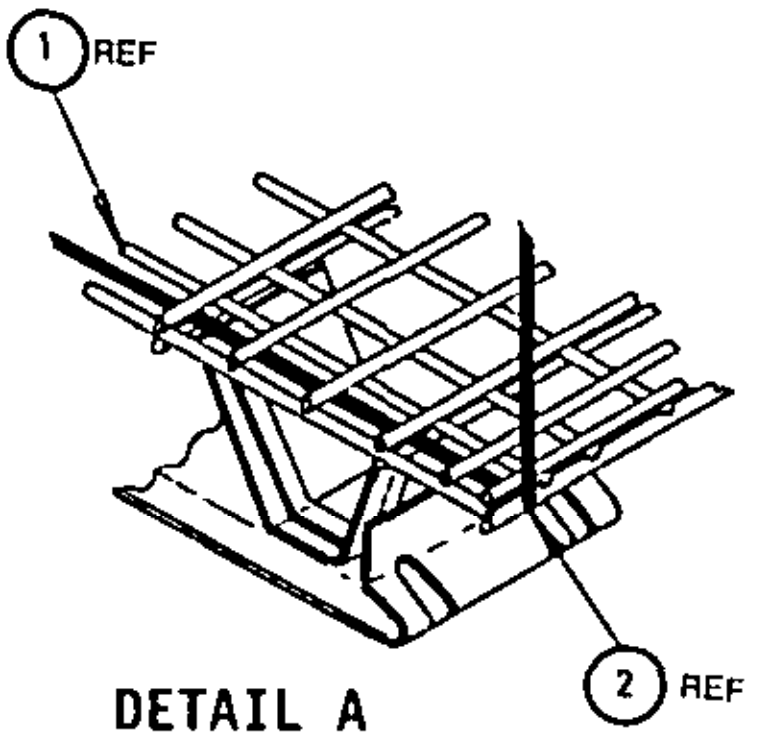

DETAIL A

THREAD BETWEEN THE 1ST AND 2ND WIRES, 2PL

NOTES: *1. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323 (NAVY).

**2. DO NOT USE TYPE 1 STRAPPING WITH POWER MACHINES.

## DEPALLETIZING PROCEDURE

a. CUT AND REMOVE UNIT LOAD STRAPPING ITEMS 2, AND 3 ONLY.

b REMOVE PROTECTOR BOARDS

c REMOVE CONTAINERS

| REQD | ITEM | DESCRIPTION | *MAT'L/DWG | DIMENSIONS |
|---|---|---|---|---|
| 4 | 6 | STAPLE | STEEL | FOR 3/4 STRAPPING |
| 3 | 5 | PROTECTOR BOARD | WOOD | 1 X 6 X 42 1/2 |
| 5 | 4 | SEAL | STEEL | 3/4 |
| 3 | 3 | STRAPPING,LATERAL ** | STEEL | 3/4 X .035 X 14 FT |
| 2 | 2 | STRAPPING,LONG. ** | STEEL | 3/4 X .035 X 15 FT 6 IN. |
| 1 | 1 | PALLET MK 3 MOD 0 | STEEL/564200 | 40 X 48 X 4 3/4 |

### LIST OF MATERIALS

REVIEW ACTIVITY

NAVY-AS

PREPARING ACTIVITY:

NAVY-OS

(PROJECT NO. 8140-N1028)

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.