MILITARY STANDARD

MIL-STD-1323-411
(NAVY)
23 APRIL 1997

UNIT LOAD
FOR UNDERWAY REPLENISHMENT

GUIDANCE SETS
(KMU-556/B, KMU-557/B, KMU--558/B OR KMU-559/B)
IN
SHIPPING & STORAGE CONTAINER, CNU-589/E

UNIT LOAD DATA

	KMU-556/B	KMU-557/B	KMU-558/B	KMU-559/B
NUMBER OF GUIDANCE SETS PER CONTAINER .	2	2	2	2
WEIGHT OF ONE GUIDANCE SET	119.5 LBS	175.5 LBS	177.5 LBS	92.5 LBS
NUMBER OF CONTAINERS PER UNIT LOAD	1	1	1	1
EMPTY WEIGHT OF CONTAINER	167 LBS	167 LBS	167 LBS	167 LBS
WEIGHT OF STRAPPING	1 LB	1 LB	1 LB	1 LB
GROSS WEIGHT OF UNIT LOAD ■	407 LBS	519 LBS	523 LBS	353 LBS

■ DO NOT USE FOR SHIPPING WEIGHT.


CONTAINER DIMENSIONS:

LENGTH	63.4
WIDTH	42
HEIGHT	32.9
STACKING HEIGHT	32.3
CUBE (OF UNIT LOAD)	50.7 CU FT

HAZARD CLASSIFICATION - INERT

FOR UNIT LOAD QUALIFICATION
SEE MACDONELL DOUGLAS TEST REPORTS
96J0141 & 96J0146.

DO NOT STACK MORE THAN 5
UNIT LOADS HIGH IN STORAGE.

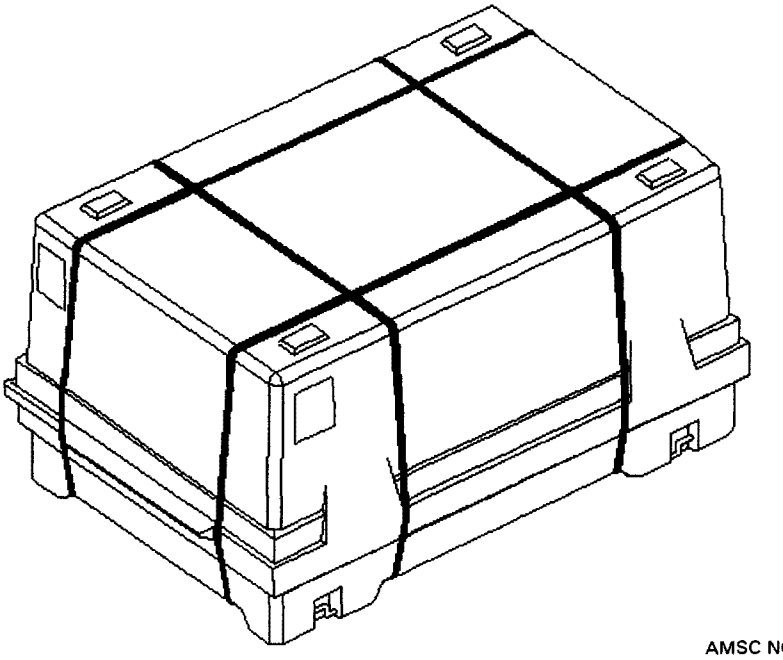

AMSC NO.-NA

NOTES:
1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.
2. FOR CROSS REFERENCE TO ASSOCIATED TRUCKLOADING, CONTAINERLOADING, AND CARLOADING MILITARY STANDARDS, REFER TO INDEX TO STANDARDS, MIL-HDBK-236.

DISTRIBUTION STATEMENT A
APPROVED FOR PUBLIC RELEASE:
DISTRIBUTION IS UNLIMITED.

REV	REVISION DESCRIPTION	DATE	TDA	SYSCOM

FSC 8140

THIS UNIT LOAD IS AUTHORIZED AND RELEASED FOR SHIPPING, HANDLING, STORAGE AND TRANSFER-AT-SEA. IT MAY ALSO BE USED FOR DOMESTIC SHIPMENT IN COMPLIANCE WITH DOT REGULATIONS.

SIGNATURE — TDA, WPNSTA EARLE — DATE 29 Apr 97

SIGNATURE — AIRSYSCOM BY DIRECTION — DATE 5/6/97

REQUIREMENTS FOR CONSTRUCTION OF THIS UNIT LOAD SHALL CONSIST OF THIS DOCUMENT AND THE LATEST ISSUE OF MIL-STD-1323 (NAVY).

ORIGINATOR — DATE 29 APR 97


NAVAL WEAPONS STATION EARLE
COLTS NECK, NEW JERSEY

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.

LOADING PROCEDURE:

(A) DIS-ASSEMBLE OUTSIDE STRAPPING AND OPEN CONTAINER.
(B) LOAD GUIDANCE SETS INTO CONTAINER.
(B) CLOSE CONTAINER AND ASSEMBLE OUTSIDE STRAPPING.

MARKING: IN ADDITION TO ANY SPECIAL MARKING REQUIRED BY CONTRACT OR ORDER, THE UNIT LOAD SHALL BE MARKED IN ACCORDANCE WITH MIL-STD-129-1 (NAVY).

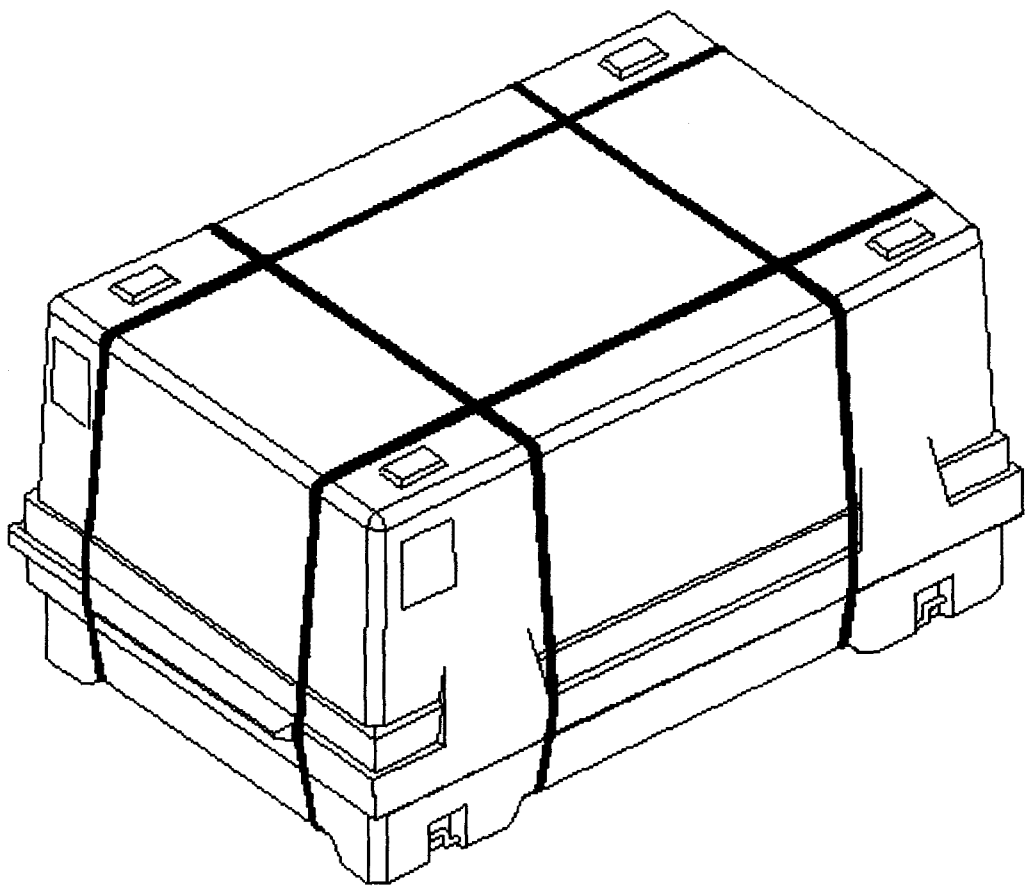

NOTES:

3. UNLESS OTHERWISE SPECIFIED, ALL MATERIALS SHALL BE IN ACCORDANCE WITH MIL-STD-1323.

DEUNITIZING PROCEDURE:

(A) DIS-ASSEMBLE OUTSIDE STRAPPING.
(B) OPEN CONTAINER.
(C) REMOVE GUIDANCE SETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-24T00:00Z
Check the source to verify that this is the current version before use.