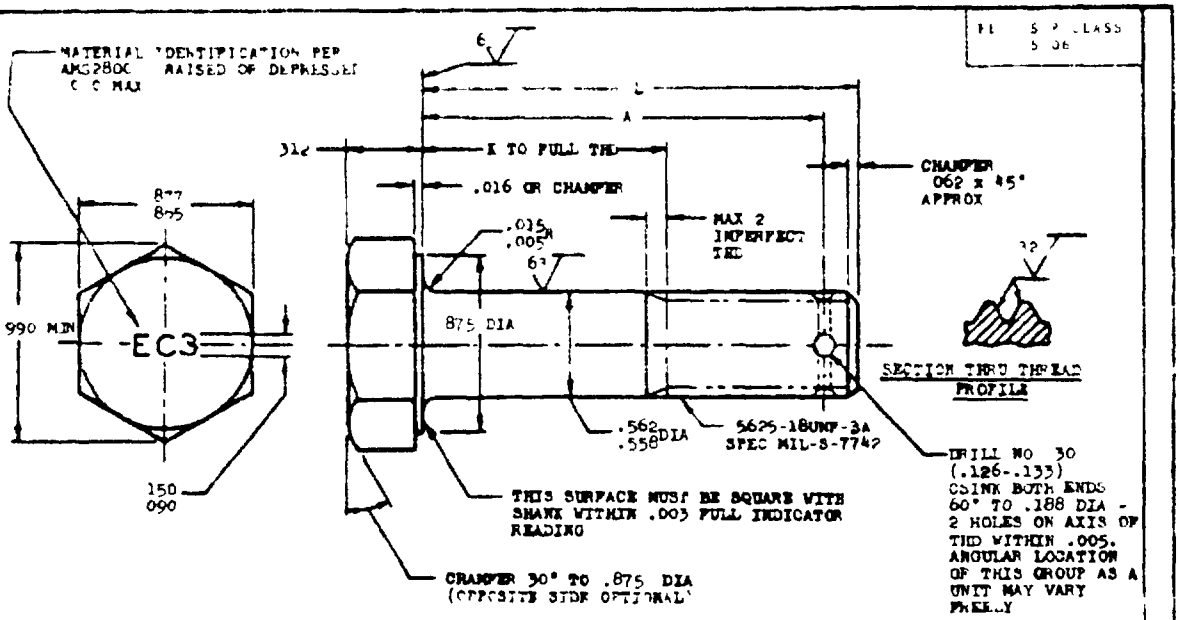


L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.	L	A	K +.000 -.060	PART NO.
				2.500	2 340	1 562	AN106124	5 125	4.965	4 188	AN106145
				2 625	2 465	1 688	AN106125	5 250	5 090	4 312	AN106146
				2 750	2 590	1.812	AN106126	5 375	5 215	4.438	AN106147
1.062	962	125	AN106107	2 875	2 715	1 938	AN106127	5 500	5 340	4 562	AN106148
1 125	965	188	AN106107	3 000	2 840	2 062	AN106128	5 625	5 465	4 688	AN106149
1 188	1 028	250	AN106109	3 125	2.965	188	AN106129	5.750	5 590	4.812	AN106150
1 250	1 090	312	AN 06110	3 250	3 090	2 312	AN106130	5 875	5 715	4 938	AN106151
1 312	1 152	375	AN 06111	3 375	3 215	2 438	AN106131	6 000	5 840	5 062	AN106152
1 375	1 215	438	AN106111	3 500	3 340	2 562	AN106132				
1 438	1 278	.500	AN106112	3.625	3 465	2 688	AN106133				
1 500	1 340	562	AN106113	3 750	3 590	2 812	AN106134				
1.562	1 402	625	AN106114	3 875	3 715	2 938	AN106135				
1 625	1 465	688	AN106115	4 000	3 840	3 062	AN106136				
1 688	1 528	750	AN106116	4 125	3 965	3 188	AN106137				
1 750	1 590	812	AN106117	4.250	4 090	3 312	AN106138				
1.812	1 652	875	AN106118	4 375	4.215	3.438	AN106139				
1.875	1 715	938	AN106119	4 500	4 340	3.562	AN106140				
2.000	1 840	1.062	AN106120	4 625	4 465	3 688	AN106141				
2 125	1 965	1.188	AN106121	4 750	4 590	3 812	AN106142				
2 250	2 090	1 312	AN106122	4 875	4 715	3 938	AN106143				
2 375	2.215	1.438	AN106123	5.000	4 840	4 062	AN106144				

NOTES: (1) SHANK SHALL BE STRAIGHT WITHIN .010 T.I.R. PER 1.000 IN. OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PITCH DIAMETER IN RELATION TO THE SHANK SHALL BE WITHIN .010 T.I.R.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .020 T.I.R.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATIONS
SURFACE ROUGHNESS: AS117
MANUFACTURING SPECIFICATION: AN 7-7
(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2644
BREAK SHARP EDGES .003 - 0.5 UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± 01; ANGULAR DIMENSIONS ±2°
DO NOT USE UNASSIGNED PART NUMBERS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PANEL COMMITTEE OF THE SAE

P.A.
USAF -
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT, CHECK, HEX HEAD, DRILLED SHANK, STEEL

AN106101 THRU AN106200

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 61 (3) 30 June 1967

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:25Z
Check the source to verify that this is the current version before use.