
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

FED SUP CLASS 5306

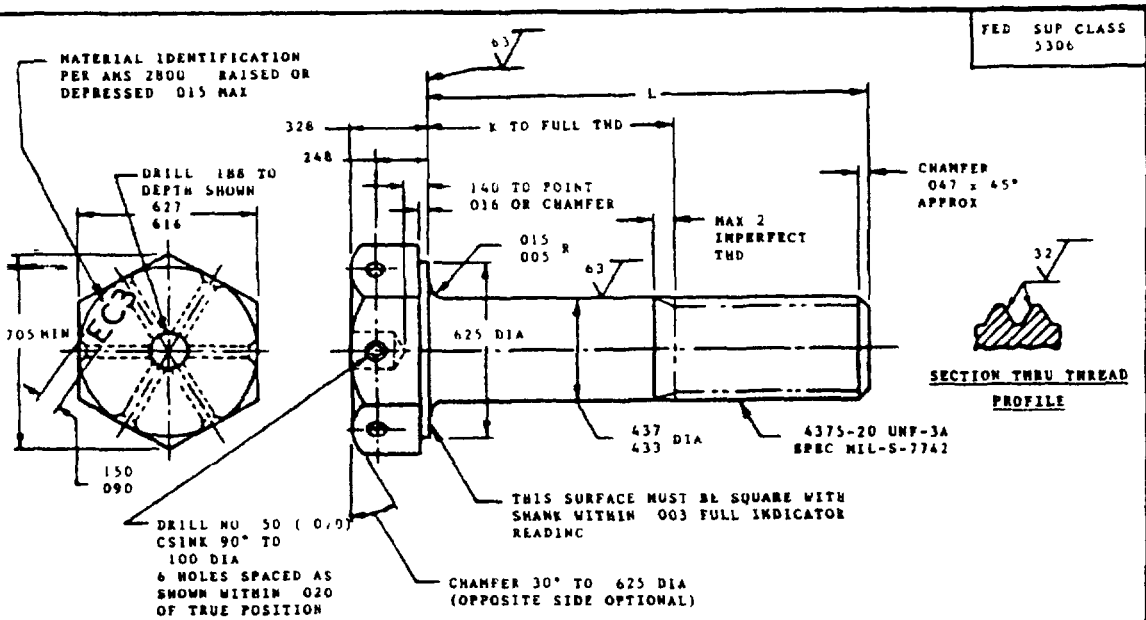

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1 562	.438	AN107719	2 750	1.625	AN107733	4 500	3 375	AN107747
.750	(a)	AN107706	1 625	500	AN107720	2 875	1 750	AN107734	4 625	3 500	AN107748
812	(a)	AN107707	1 688	.562	AN107721	3 000	1 875	AN107735	4 750	3 625	AN107749
.875	(a)	AN107708	1 750	.625	AN107722	3 125	2.000	AN107736	4 875	3 750	AN107750
938	(a)	AN107709	1 812	.688	AN107723	3.250	2.125	AN107737	5.000	3.875	AN107751
1 000	(a)	AN107710	1 875	750	AN107724	3 375	2.250	AN107738	5 125	4.000	AN107752
1 062	(a)	AN107711	1 938	812	AN107725	3.500	2.375	AN107739	5 250	4.125	AN107753
1.125	(a)	AN107712	2 000	875	AN107726	3.625	2.500	AN107740	5 375	4.250	AN107754
1 188	(a)	AN107713	2 062	.938	AN107727	3.750	2.625	AN107741	5 500	4.375	AN107755
1.250	(a)	AN107714	2 125	1 000	AN107728	3 875	2 750	AN107742	5.625	4 500	AN107756
1 312	.188	AN107715	2 250	1.125	AN107729	4.000	2.875	AN107743	5 750	4.625	AN107757
1 375	.250	AN107716	2 375	1 250	AN107730	4 125	3.000	AN107744	5 875	4.750	AN107758
1 438	.312	AN107717	2 500	1 375	AN107731	4 250	3 125	AN107745	6 000	4 875	AN107759
1 500	.375	AN107718	2 625	1 500	AN107732	4 375	3.250	AN107746			

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN 0025 FIR PER INCH OF BOLT LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN 019 FIR

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL CORROSION RESISTANT STEEL SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS AS107

MANUFACTURING SPECIFICATION AMS 7472

(3) INSPECTION ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645

BREAK SHARP EDGES 003 - 015 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± 010 ANGULAR DIMENSIONS ±2°

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

P A
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD 6 HOLES, 4375 - 20

AN107701 THRU AN107800

Project No 5306-1061

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.