
FED. SUP CLASS. 5306

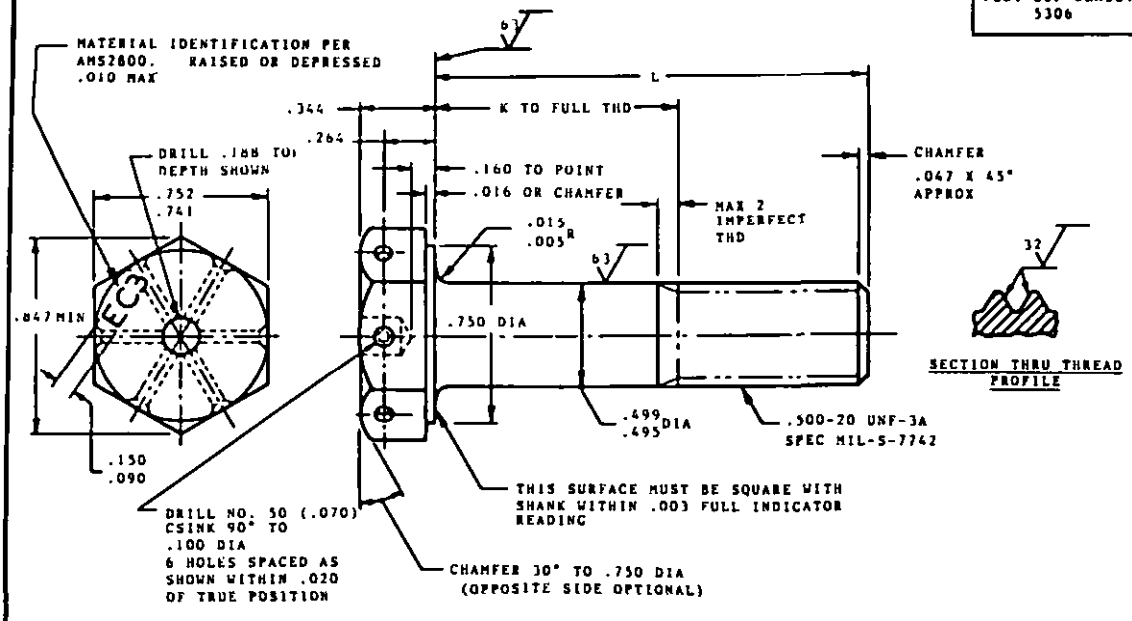

L	K +.000 −.060	PART NO.	L	K +.000 −.060	PART NO.	L	K +.000 −.060	PART NO.	L	K +.000 −.060	PART NO.
			1.812	.562	AN107819	3.125	1.875	AN107833	4.875	3.625	AN107847
1.000	(a)	AN107806	1.875	.625	AN107820	3.250	2.000	AN107834	5.000	3.750	AN107848
1.062	(a)	AN107807	1.938	.688	AN107821	3.375	2.125	AN107835	5.125	3.875	AN107849
1.125	(a)	AN107808	2.000	.750	AN107822	3.500	2.250	AN107836	5.250	4.000	AN107850
1.188	(a)	AN107809	2.062	.812	AN107823	3.625	2.375	AN107837	5.375	4.125	AN107851
1.250	(a)	AN107810	2.125	.875	AN107824	3.750	2.500	AN107838	5.500	4.250	AN107852
1.312	(a)	AN107811	2.188	.938	AN107825	3.875	2.625	AN107839	5.625	4.375	AN107853
1.375	(a)	AN107812	2.250	1.000	AN107826	4.000	2.750	AN107840	5.750	4.500	AN107854
1.438	.188	AN107813	2.375	1.125	AN107827	4.125	2.875	AN107841	5.875	4.625	AN107855
1.500	.250	AN107814	2.500	1.250	AN107828	4.250	3.000	AN107842	6.000	4.750	AN107856
1.562	.312	AN107815	2.625	1.375	AN107829	4.375	3.125	AN107843			
1.625	.375	AN107816	2.750	1.500	AN107830	4.500	3.250	AN107844			
1.688	.438	AN107817	2.875	1.625	AN107831	4.625	3.375	AN107845			
1.750	.500	AN107818	3.000	1.750	AN107832	4.750	3.500	AN107846			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 6 HOLES, .500-20

AN107801 THRU AN107900

Project No. 5306-1062

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.