
FED. SUP CLASS. 5306

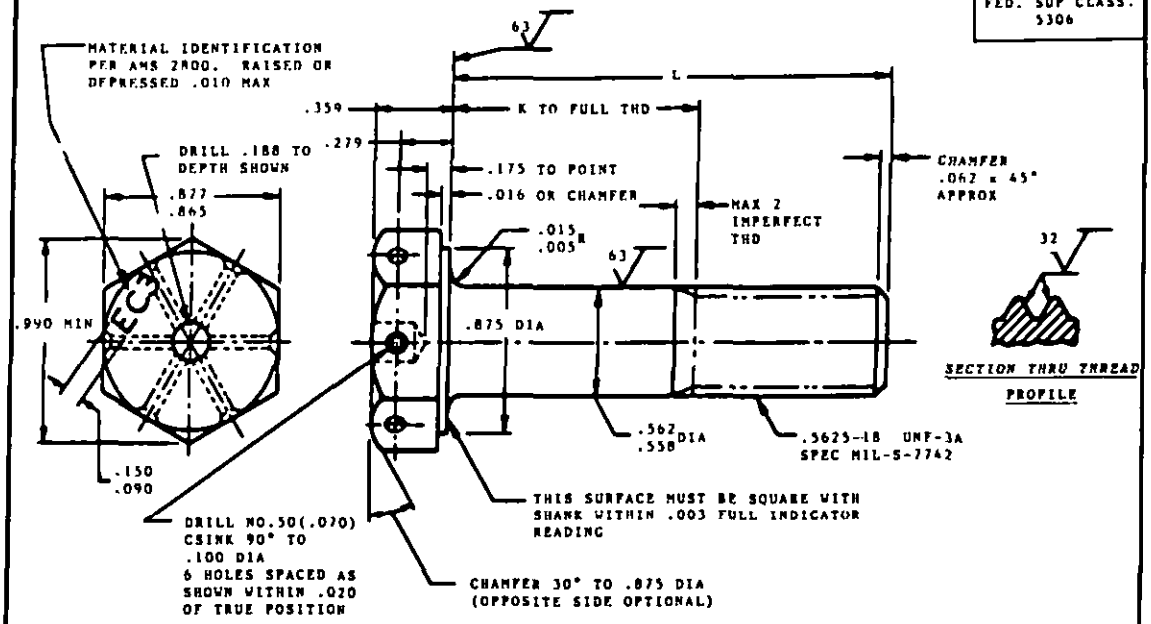

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
1.125	(a)	AN107906	1.938	.562	AN107919	3.250	1.875	AN107933	5.000	3.625	AN107947
1.188	(a)	AN107907	2.000	.625	AN107920	3.375	2.000	AN107934	5.125	3.750	AN107948
1.250	(a)	AN107908	2.062	.688	AN107921	3.500	2.125	AN107935	5.250	3.875	AN107949
1.312	(a)	AN107909	2.125	.750	AN107922	3.625	2.250	AN107936	5.375	4.000	AN107950
1.375	(a)	AN107910	2.188	.812	AN107923	3.750	2.375	AN107937	5.500	4.125	AN107951
1.438	(a)	AN107911	2.250	.875	AN107924	3.875	2.500	AN107938	5.625	4.250	AN107952
1.500	(a)	AN107912	2.312	.938	AN107925	4.000	2.625	AN107939	5.750	4.375	AN107953
1.562	(a)	AN107913	2.375	1.000	AN107926	4.125	2.750	AN107940	5.875	4.500	AN107954
1.625	.250	AN107914	2.500	1.125	AN107927	4.250	2.875	AN107941	6.000	4.625	AN107955
1.688	.312	AN107915	2.625	1.250	AN107928	4.375	3.000	AN107942			
1.750	.375	AN107916	2.750	1.375	AN107929	4.500	3.125	AN107943			
1.812	.438	AN107917	2.875	1.500	AN107930	4.625	3.250	AN107944			
1.875	.500	AN107918	3.000	1.625	AN107931	4.750	3.375	AN107945			
			3.125	1.750	AN107932	4.875	3.500	AN107946			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 6 HOLES, .5625 - 18

AN107901 THRU AN108000

Project No. 5306-1063

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.