
FED. SUP CLASS. 5306

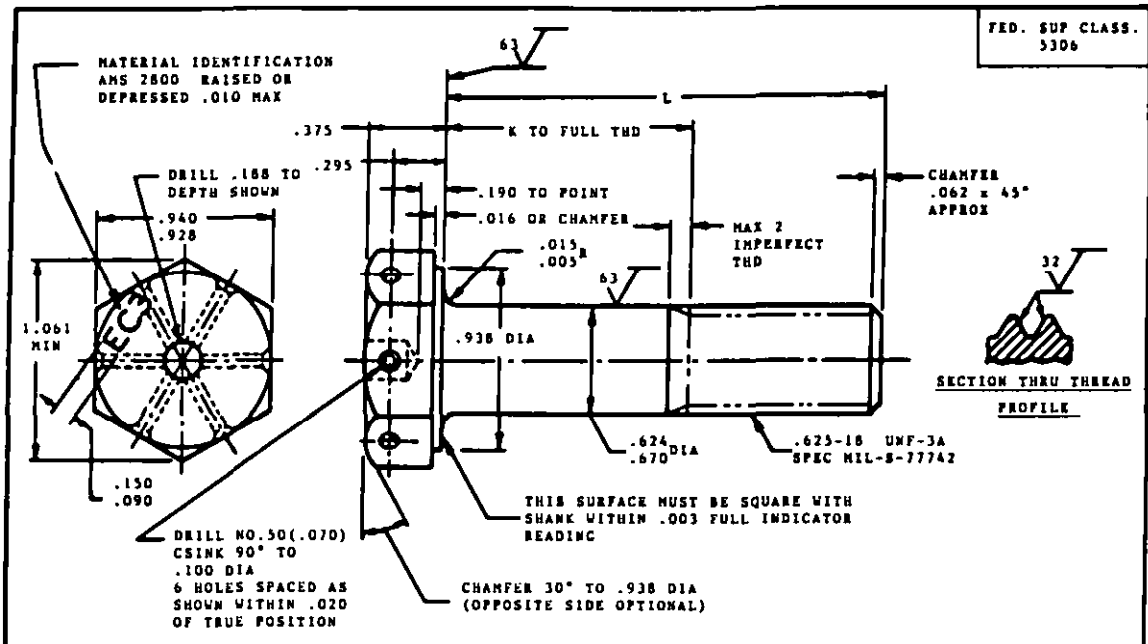

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			1.938	.438	AN108017	3.125	1.625	AN108031	4.875	3.375	AN108045
			2.000	.500	AN108018	3.250	1.750	AN108032	5.000	3.500	AN108046
			2.062	.562	AN108019	3.375	1.875	AN108033	5.125	3.625	AN108047
1.250	(a)	AN108006	2.125	.625	AN108020	3.500	2.000	AN108034	5.250	3.750	AN108048
1.312	(a)	AN108007	2.188	.688	AN108021	3.625	2.125	AN108035	5.375	3.875	AN108049
1.375	(a)	AN108008	2.250	.750	AN108022	3.750	2.250	AN108036	5.500	4.000	AN108050
1.438	(a)	AN108009	2.312	.812	AN108023	3.875	2.375	AN108037	5.625	4.125	AN108051
1.500	(a)	AN108010	2.375	.875	AN108024	4.000	2.500	AN108038	5.750	4.250	AN108052
1.562	(a)	AN108011	2.438	.938	AN108025	4.125	2.625	AN108039	5.875	4.375	AN108053
1.625	(a)	AN108012	2.500	1.000	AN108026	4.250	2.750	AN108040	6.000	4.500	AN108054
1.688	.188	AN108013	2.625	1.125	AN108027	4.375	2.875	AN108041			
1.750	.250	AN108014	2.750	1.250	AN108028	4.500	3.000	AN108042			
1.812	.312	AN108015	2.875	1.375	AN108029	4.625	3.125	AN108043			
1.875	.375	AN108016	3.000	1.500	AN108030	4.750	3.250	AN108044			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .028 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472 -

(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. USAF - 11 Other Cust Navy - AS Army - AV	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN108001 THRU AN108100
	BOLT - CRES DRILLED HEX HEAD, 6 HOLES, .625-18	

Project No. 5306-1064

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.