FED. SUP CLASS.
5306

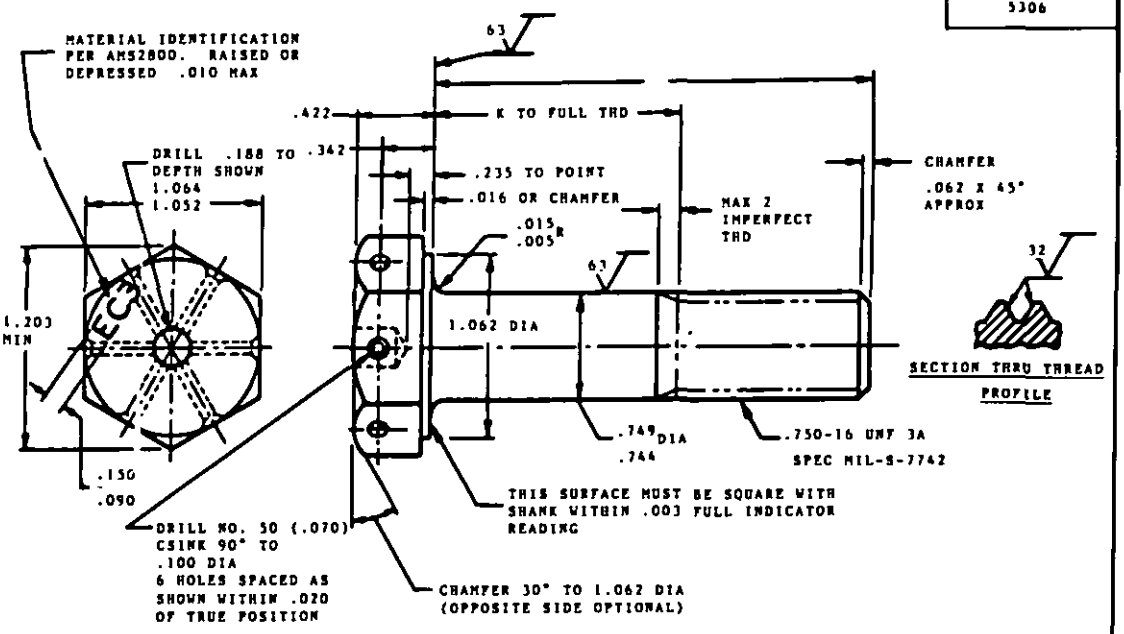

L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.	L	K +.000 -.060	PART NO.
			2.188	.438	AN108117	3.375	1.625	AN108131	5.125	3.375	AN108145
			2.250	.500	AN108118	3.500	1.750	AN108132	5.250	3.500	AN108146
			2.312	.562	AN108119	3.625	1.875	AN108133	5.375	3.625	AN108147
1.500	(a)	AN108106	2.375	.625	AN108120	3.750	2.000	AN108134	5.500	3.750	AN108148
1.562	(a)	AN108107	2.438	.688	AN108121	3.875	2.125	AN108135	5.625	3.875	AN108149
1.625	(a)	AN108108	2.500	.750	AN108122	4.000	2.250	AN108136	5.750	4.000	AN108150
1.688	(a)	AN108109	2.562	.812	AN108123	4.125	2.375	AN108137	5.875	4.125	AN108151
1.750	(a)	AN108110	2.625	.875	AN108124	4.250	2.500	AN108138	6.000	4.250	AN108152
1.812	(a)	AN108111	2.688	.938	AN108125	4.375	2.625	AN108139			
1.875	(a)	AN108112	2.750	1.000	AN108126	4.500	2.750	AN108140			
1.938	(a)	AN108113	2.875	1.125	AN108127	4.625	2.875	AN108141			
2.000	(a)	AN108114	3.000	1.250	AN108128	4.750	3.000	AN108142			
2.062	(a)	AN108115	3.125	1.375	AN108129	4.875	3.125	AN108143			
2.125	(a)	AN108116	3.250	1.500	AN108130	5.000	3.250	AN108144			

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .032 FIR.

INACTIVE FOR DESIGN AFTER 27 DEC 1966 NO SUPERSEDING STANDARD.

MATERIAL: CORROSION RESISTANT STEEL - SEE MANUFACTURING SPECIFICATION

SURFACE ROUGHNESS: AS107

MANUFACTURING SPECIFICATION: AMS 7472

(3) INSPECTION: ALL PARTS SHALL UNDERGO FLUORESCENT PENETRANT INSPECTION IN ACCORDANCE WITH AMS2645.

BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 18 Jul 49 REVISED (1) 31 Aug 54 (2) 27 Dec 66 (3) 30 June 1986

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A.
USAF - 11
Other Cust
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

BOLT - CRES DRILLED HEX HEAD, 6 HOLES, .750-16

AN108101 THRU AN108200

Project No. 5306-1065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.