DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited

FED SUP CLASS 5305

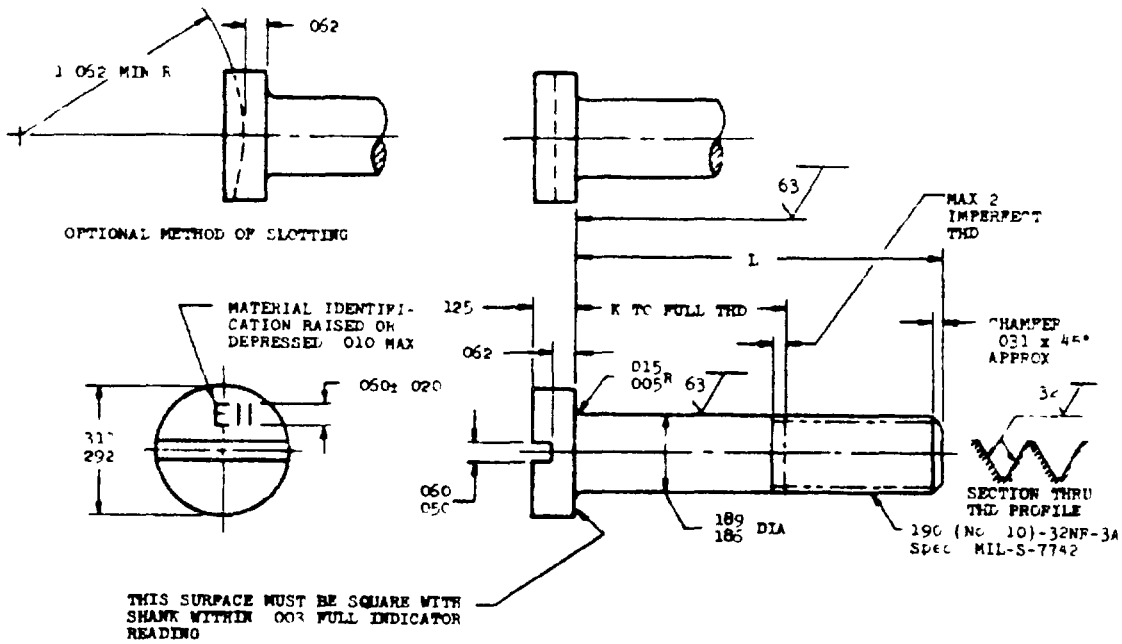

L	K + 000 - 060	PART NO	L	K + 000 - 060	PART NO	L	K + 000 - 060	PART NO
250	(a)	AN115405	1 000	438	AN115417	2 000	1 438	AN115429
312	(a)	AN115406	1 062	500	AN115418	2 125	1 562	AN115430
375	(a)	AN115407	1 125	562	AN115419	2 250	1 688	AN115431
438	(a)	AN115408	1 188	625	AN115420	2 375	1 812	AN115432
500	(a)	AN115409	1 250	688	AN115421	2 500	1 938	AN115433
562	(a)	AN115410	1 312	750	AN115422	2 625	2 062	AN115434
625	(a)	AN115411	1 375	812	AN115423	2 750	2 188	AN115435
688	125	AN115412	1 438	875	AN115424	2 875	2 312	AN115436
750	188	AN115413	1 500	938	AN115425	3 000	2 438	AN115437
812	250	AN115414	1 625	1 062	AN115426			
875	312	AN115415	1 750	1 188	AN115427			
938	375	AN115416	1 875	1 312	AN115428			

(a) THREA TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED 004 FIR PER INCH OF SCREW LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN 006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE HEAD SHALL BE WITHIN 010 FIR

MATERIAL STEEL AMS 6322

HARDNESS ROCKWELL C 6 3

FINISH CADMIUM PLATE AMS

SURFACE RO THN

MANUFACTURING SPECIFICATION AMS 7452

(2) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES 003- 015 NLESS OTHERWISE SPECIFIED TOLERANCES LINEAR DIMENSIONS ± 010

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER STANDARD PARTS COMMITTEE OF THE SAE

APPROVED 8 Jan 43 REVISED (1) 4 Oct 54 (2) 30 June 1966

P A
USAF -
Other use
Navy - AS
Army - AV

AIR FORCE-NAVY AERONAUTICAL STANDARD

SCREW - FLAT FILLISTER HEAD 100-3

AN115401 thru AN115450

Project No 5305-0015

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.