DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

FED SUP CLASS 5305

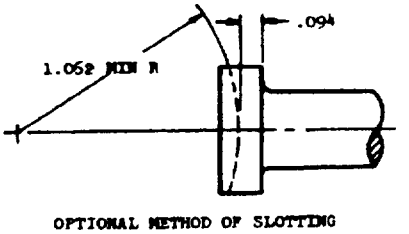

OPTIONAL METHOD OF SLOTTING

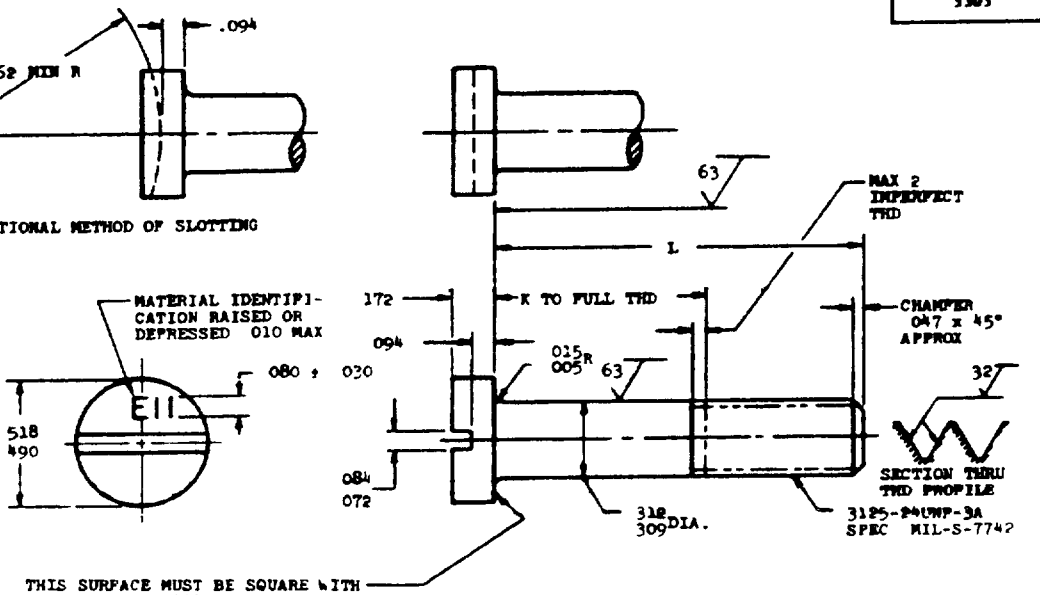

L	K +.000 -.050	PART NO	L	K +.000 -.050	PART NO.	L	K +.000 -.050	PART NO
.500	(a)	AN115505	1.250	.562	AN115517	2.250	1.562	AN115529
.562	(a)	AN115506	1.312	.625	AN115518	2.375	1.688	AN115530
.625	(a)	AN115507	1.375	.688	AN115519	2.500	1.812	AN115531
.688	(a)	AN115508	1.438	.750	AN115520	2.625	1.938	AN115532
.750	(a)	AN115509	1.500	.812	AN115521	2.750	2.062	AN115533
.812	.125	AN115510	1.562	.875	AN115522	2.875	2.188	AN115534
.875	.188	AN115511	1.625	.938	AN115523	3.000	2.312	AN115535
.938	.250	AN115512	1.688	1.000	AN115524			
1.000	.312	AN115513	1.750	1.062	AN115525			
1.062	.375	AN115514	1.875	1.188	AN115526			
1.125	.438	AN115515	2.000	1.312	AN115527			
1.188	.500	AN115516	2.125	1.438	AN115528			

(a) THREAD TO HEAD MAXIMUM TWO IMPERFECT THREADS

NOTE (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .003 FIR PER INCH OF SCREW LENGTH
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE HEAD SHALL BE WITHIN .010 FIR

MATERIAL: STEEL AMS 6322

HARDNESS ROCKWELL C26-32

FINISH CADMIUM PLATE AMS 2400

SURFACE ROUGHNESS AS 107

MANUFACTURING SPECIFICATION AMS 7452

(2) INSPECTION ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS ± .010

DO NOT USE UNASSIGNED PART NUMBERS

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER STANDARD PARTS COMMITTEE OF THE SAE

APPROVED 8 Jan 49 REVISED (1) 4 Oct 54 (2) 30 June 1956

P A USAF - 11 Other Cust Navy - AS Army - AV	AIR FORCE-NAVY AERONAUTICAL STANDARD SCREW - FLAT FILLISTER HEAD, 3125-24	AN115501 THRU AN115550

Project No 5305-1637

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.