AN116901 THRU AN116912

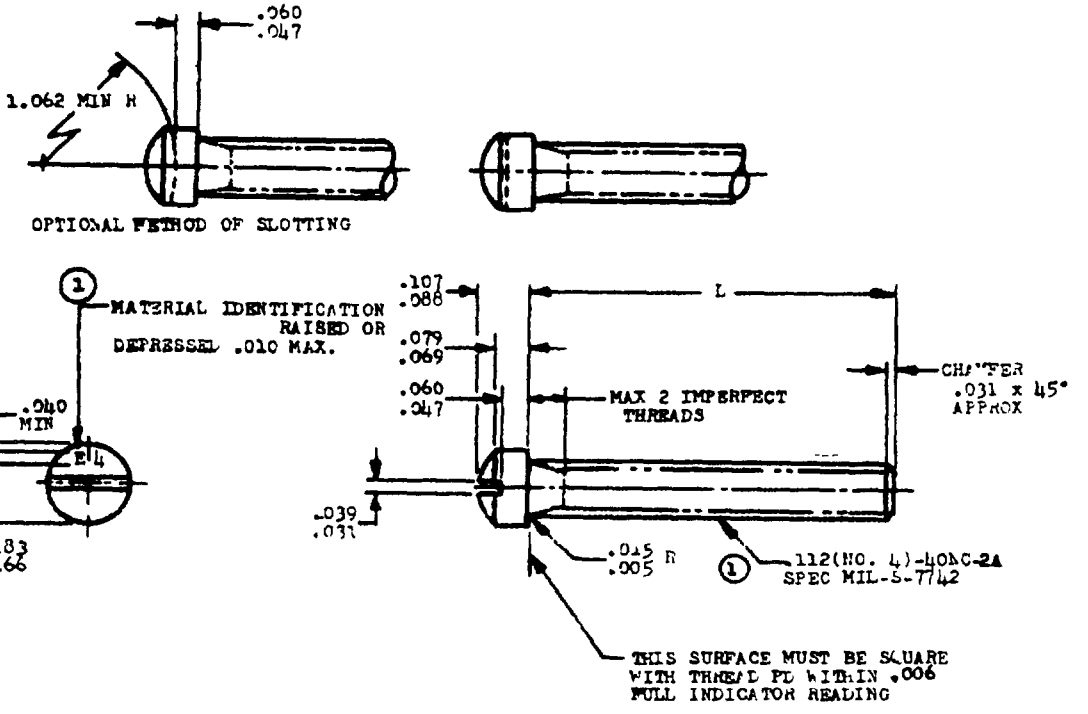

L	PART NO.	L	PART NO.
.250	AN116902	.562	AN116907
.312	AN116903	.625	AN116908
.375	AN116904	.688	AN116909
.438	AN116905	.750	AN116910
.500	AN116906		

(1)

NOTE: THE CONCENTRICITY OF THREAD PD IN RELATION TO THE HEAD SHALL BE WITHIN .005 FIM.

MATERIAL: STEEL AMS 5061

STRESS RELIEVE AFTER HEADING. MATERIAL SPECIFICATION HARDNESS REQUIREMENTS MUST BE MAINTAINED.

FINISH: CADMIUM PLATE AMS 2400

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES, LINEAR DIMENSIONS ± .010.

DO NOT USE UNASSIGNED PART NUMBERS

APPROVED 1 Jul 49 REVISED (1) 15 Dec 54

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN 116901 THRU AN 116912
	SCREW-OVAL FILLISTER HEAD, .112-40 (1)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.