NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all superseded standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, as far as is new design, not later than 6 months after the latest date of approval shown.

N. A: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS. 5305

AN116961 THRU AN117000

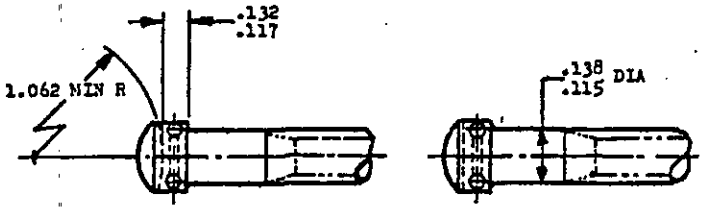

OPTIONAL METHOD OF SLOTTING

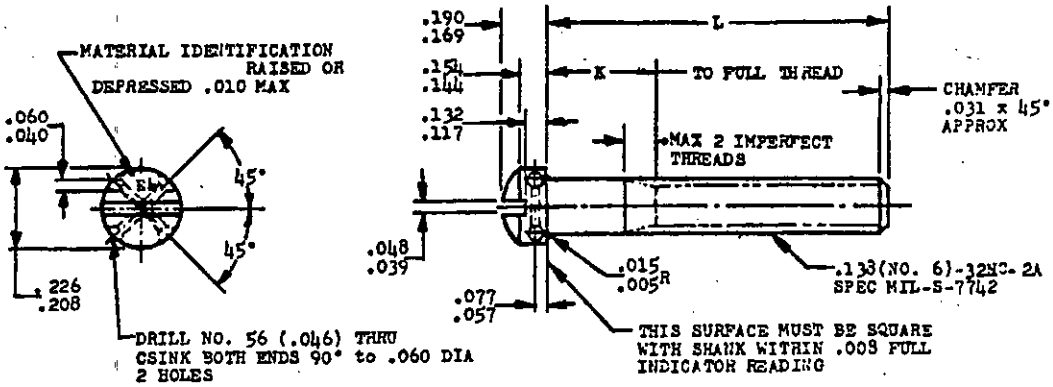

L	K*.000 -.060	PART NO.	L	K*.000 -.060	PART NO.	L	K*.000 -.060	PART NO.
			.938	(a)	AN116973	2.750	1.500	AN116988
.250	(a)	AN116962	1.000	(a)	AN116974	3.000	1.750	AN116990
.312	(a)	AN116963	1.125	(a)	AN116975			
.375	(a)	AN116964	1.250	(a)	AN116976			
.438	(a)	AN116965	1.375	.125	AN116977			
.500	(a)	AN116966	1.500	.250	AN116978			
.562	(a)	AN116967	1.625	.375	AN116979			
.625	(a)	AN116968	1.750	.500	AN116980			
.688	(a)	AN116969	1.875	.625	AN116981			
.750	(a)	AN116970	2.000	.750	AN116982			
.812	(a)	AN116971	2.250	1.000	AN116984			
.875	(a)	AN116972	2.500	1.250	AN116986			

(a) THREAD TO HEAD. MAX TWO IMPERFECT THREADS

NOTE: SHANK SHALL BE STRAIGHT WITHIN .004 FIR PER INCH OF SCREW LENGTH.
THE CONCENTRICITY OF THREAD PD IN RELATION TO THE HEAD SHALL BE WITHIN .005 FIR.

MATERIAL: STEEL AMS 5061
STRESS RELIEVE AFTER HEADING. MATERIAL SPECIFICATION HARDNESS REQUIREMENTS MUST BE MAINTAINED.

FINISH: CADMIUM PLATE AMS 2400

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 2°.

DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 19 May 50 REVISED (1) 14 Dec 54 (2) 31 Mar 58

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN116961 THRU AN117000
NONE	SCREW - OVAL FILLISTER DRILLED HEAD, .138-32	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.