


OPTIONAL METHOD OF SLOTTING

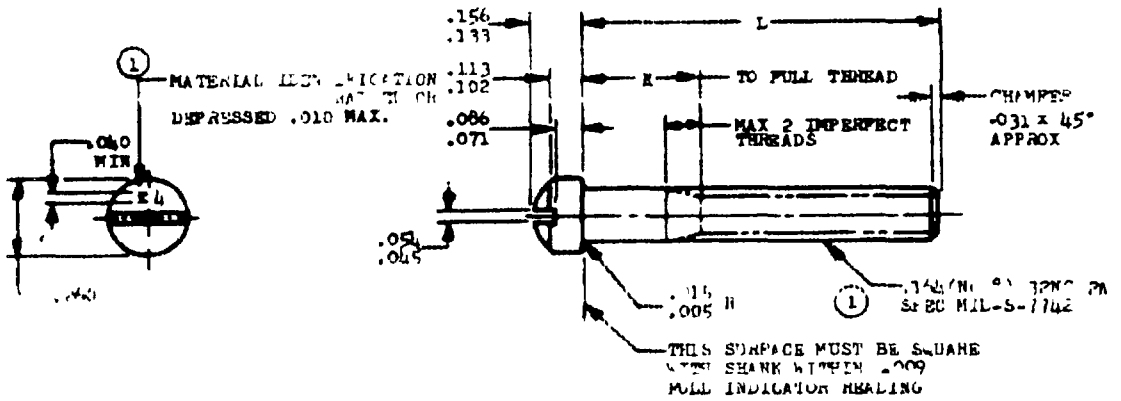

MATERIAL IDENTIFICATION
DEPRESSED .010 MAX.

L	K ±.060	PART NO	L	K ±.000 ±.060	PART NO	L	K ±.000 ±.060	PART NO.
.250	(a)	AN117003	.000	(a)	AN117014	1.500	1.250	AN117030
.312	(a)	AN117004	1.125	(a)	AN117015			
.375	(a)	AN117004	1.250	(a)	AN117016			
.438	(a)	AN117005	1.375	.125	AN117017			
.500	(a)	AN117006	1.500	.250	AN117018			
.562	(a)	AN117007	1.625	.375	AN117019			
.625	(a)	AN117008	1.750	.500	AN117020			
.688	(a)	AN117009	1.875	.625	AN117021			
.750	(a)	AN117010	2.000	.750	AN117022			
.812	(a)	AN117011	2.125	1.000	AN117024			
.875	(a)	AN117012	2.250	1.250	AN117026			

(a) THIS SIZE MAY HAVE IMPERFECT THREADS

NOTE (1) SHANK SHALL BE STRAIGHT WITHIN .004 FIR PER INCH OF SCREW LENGTH.
THE CONCENTRICITY OF THREAD PD IN RELATION TO THE HEAD SHALL BE WITHIN .005 FIR.

MATERIAL STEEL AMS 5061

STRESS RELIEVE AFTER HEADING MATERIAL SPECIFICATION HARDNESS REQUIREMENTS MUST BE MAINTAINED.

FINISH CADMIUM PLATE AMS 2400

BREAK SHARP EDGES .003 .015 UNLESS OTHERWISE SPECIFIED

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. TOLERANCES, LINEAR DIMENSIONS ± .01

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED JOINTLY WITH THE ENGINE AND AIRFRAME UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 1 ... REVISED (1) ...

PROCUREMENT SPECIFICATION	AIR FORCE NAVY AERONAUTICAL STANDARD (1)	AN117001 THRU AN117040

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.