
AN122776 THRU AN122802

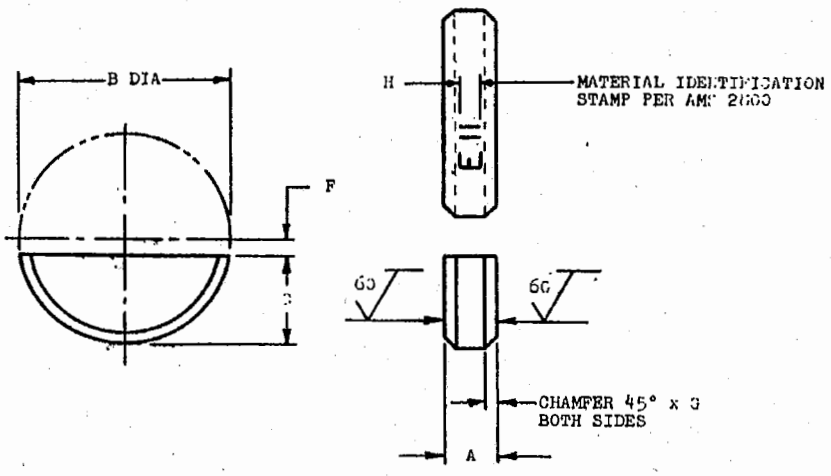

NOMINAL KEY SIZE (A x B)	A +.0010 -.0000	B +.000 -.010	C +.000 -.005	F NOM	G(a)	H	PART NO
.062 x .500	.0625	.500	.203	.047	.010	.040±.020	AN122776
.094 x .500	.0938	.500	.203	.047	.020	.060±.020	AN122777
.094 x .625	.0938	.625	.250	.062	.020	.060±.020	AN122778
.125 x .500	.1250	.500	.203	.047	.020	.080±.020	AN122779
.125 x .625	.1250	.625	.250	.062	.030	.080±.020	AN122780
.125 x .750	.1250	.750	.313	.062	.030	.080±.020	AN122781
.156 x .625	.1563	.625	.250	.062	.030	.080±.020	AN122782
.156 x .750	.1563	.750	.313	.062	.030	.080±.020	AN122783
.156 x .875	.1563	.875	.375	.062	.030	.080±.020	AN122784
.188 x .750	.1875	.750	.313	.062	.040	.120±.030	AN122785
.188 x .875	.1875	.875	.375	.062	.040	.120±.030	AN122786
.188 x 1.000	.1875	1.000	.438	.062	.040	.120±.030	AN122787
.188 x 1.125	.1875	1.125	.484	.078	.040	.120±.030	AN122788
.250 x .875	.2500	.875	.375	.062	.050	.120±.030	AN122789
.250 x 1.000	.2500	1.000	.438	.062	.050	.120±.030	AN122790
.250 x 1.125	.2500	1.125	.484	.078	.050	.120±.030	AN122791
.250 x 1.250	.2500	1.250	.547	.078	.050	.120±.030	AN122792
.250 x 1.375	.2500	1.375	.594	.094	.050	.120±.030	AN122793
.250 x 1.500	.2500	1.500	.641	.109	.050	.120±.030	AN122794
.312 x 1.000	.3125	1.000	.438	.062	.050	.120±.030	AN122795
.312 x 1.125	.3125	1.125	.484	.078	.050	.120±.030	AN122796
.312 x 1.250	.3125	1.250	.547	.078	.050	.120±.030	AN122797
.312 x 1.375	.3125	1.375	.594	.094	.050	.120±.030	AN122798
.312 x 1.500	.3125	1.500	.641	.109	.050	.120±.030	AN122799
.375 x 1.250	.3750	1.250	.547	.078	.060	.120±.030	AN122800
.375 x 1.375	.3750	1.375	.594	.094	.060	.120±.030	AN122801
.375 x 1.500	.3750	1.500	.641	.109	.060	.120±.030	AN122802

① INACTIVE FOR DESIGN AFTER 29 JANUARY 1960 NO SUPERSEDING STANDARD.

(a) NOTE: G TOLERANCE; +.010 -.000 WHEN G = .040 OR LESS
+.015 -.000 WHEN G = .050 OR MORE

① FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 353.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL 040-45. HARDEN (OIL QUENCH) AND TEMPER

SURFACE ROUGHNESS: AS107

② CANCELED AS OF 9 Oct 87.

REMOVE ALL BURRS. BREAK SHARP EDGES .003-.015

PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES;
LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE AIRFRAME AND PROPELLER STANDARD PARTS COMMITTEE OF THE SAE

PROCUREMENT SPECIFICATION

AIR FORCE-NAVY AERONAUTICAL STANDARD

AN122776 THRU AN122802

PROJECT 5315-0414

KEY - CHAMFERED WOODRUFF

APPROVED 28 Sep 48 REVISED ① 29 Jul 59 ② 9 Oct 87

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTICE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. The drafting supervisor of all Air Force and Navy standard drawings for the same product and shall become effective for the procurement of aeronautical supplies, or for use in new designs, not later than 6 months after the latest date of approval shown.

NOTICE: This drawing and specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T14:26:
Check the source to verify that this is the current version before use.