MIL-T-48599 (AR)
AMENDMENT 2
11 October 1993
SUPERSEDING
AMENDMENT 1
30 June 1982

MILITARY SPECIFICATION

TEST SET, INVERTER, CONVERTER CHASSIS ASSEMBLY: 11748234

This amendment forms a part of MIL-T-48599 (MU), dated 11 April 1977, and is approved for use by the US Army Armament, Munitions, and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 4

Table I, J1 Terminal Column:

Delete "1 & 32" and substitute "1 & 22".

Delete "22 & 32' and substitute "22 & 30".

* Table I, line for JI Terminals 12 & 18:

Delete : 12 & 18; 34.7V±1%; 30.1 ohms; ±1% 10W; 17.35V±2%

Substitute: 12 & 18; 109.7V±1%; 301 ohms; ±1% 10W; 54.8V±2%

PAGE 5

3.4.2.2.3, Delete in its entirety and substitute:

"3.4.2.2.3 Diode Resistance.- The diode shall have a forward bias resistance of 5 ohms maximum."

DISTRIBUTION STATEMENT A **Approved for public release; distribution is unlimited.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

PAGE 5 (Cont'd.)

Figure 1, Delete in its entirety and substitute new Figure 1.

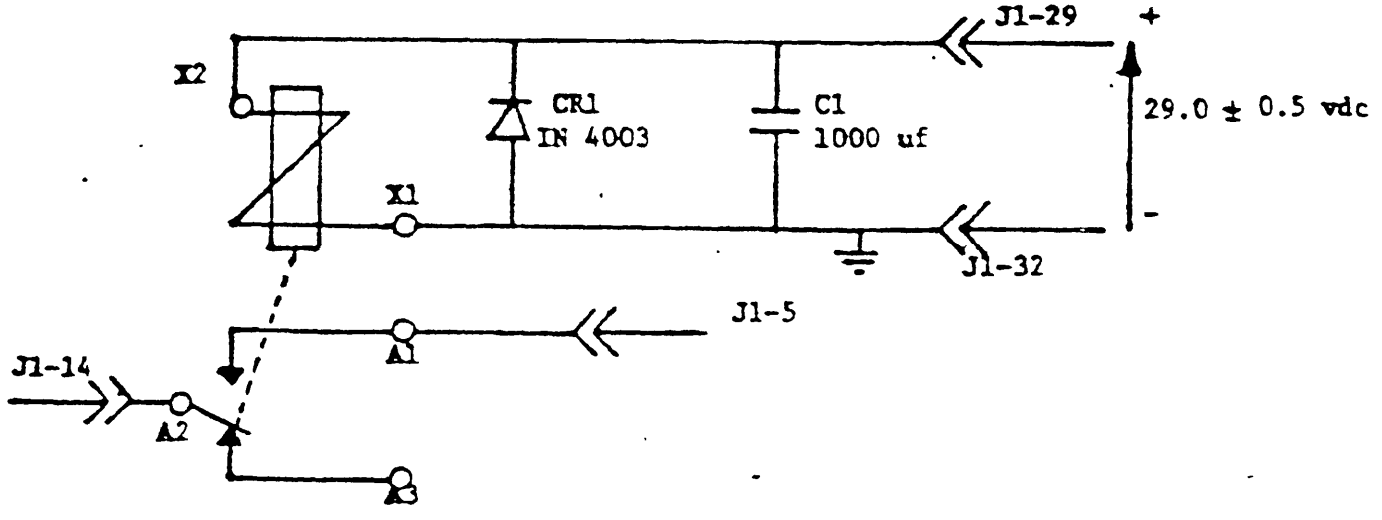

PAGE 9

* Table IV, Description for RT11:

Delete: MIL-R-18546D, RE65N30RI

Substitute: MIL-R-39009, RER65F3010R

PAGE 12

Table V, J1 Terminal Column:

Delete "1 & 32" and substitute "1 & 22".

Delete "22 & 32" and substitute "22 & 30".

Table V, Figure Column: Delete "3,4,5,6,7,8,9,10,11,12,13" and substitute "2,3,4,5,6,7,8,9,10,11,12".

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:33Z
Check the source to verify that this is the current version before use.

PAGE 12 (Cont'd.)

4.5.2.2.2.1, line 2, after J1-29: "J1-32".

Line for JI Terminals 12 & 18:

Delete: 12 & 18; 9; 34.7±1%; 17.35±2%

Substitute: 12 & 18; 9; 109.7±1%; 54.8±2%

PAGE 13

4.5.2.2.2.3, Delete in its entirety and substitute:

"4.5.2.2.2.3 Diode Resistance.- With the switch turned to OFF position, connect the common lead of the Digital D.C. Voltmeter (Item 2) to the cathode site of the diode (J1-29) and the + lead to the J1-32 Terminal. The Digital D.C. Voltmeter shall read the diode resistance of 5 ohms maximum."

PAGE 14

Figure 7: Delete "J1-1" and substitute "J1-22".

Delete "J1-32" and substitute "J1-1".

PAGE 15

Figure 8: Delete "J1-32" and substitute "J1-30".

Figure 9:

Delete:



Substitute:



Figure 11: Delete "J1-2" and substitute "J1-4".

Delete "J1-4" and substitute "J1-2".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.

PAGE 15 (Cont'd.)

Figure 13: Delete in its entirety and substitute new Figure 13:

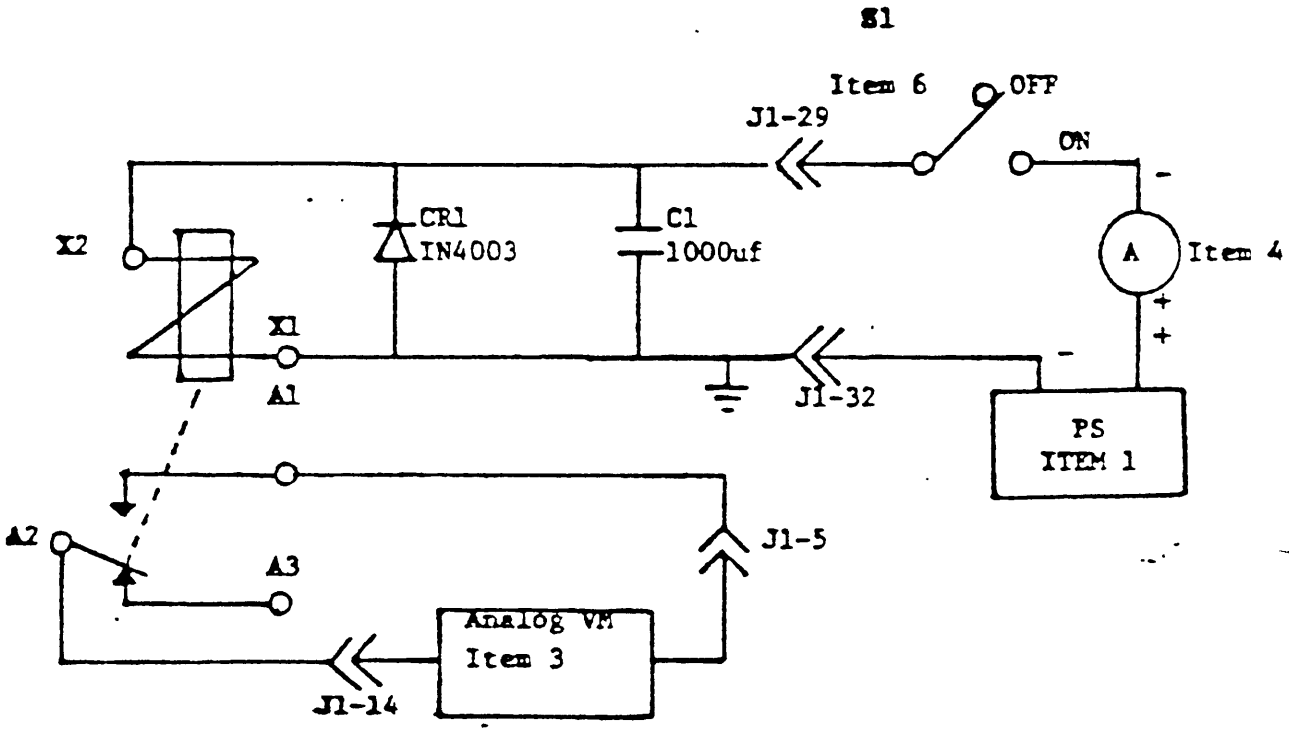

The margins of this amendment are marked with an asterisk or vertical lines to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodian:
Army-AR

Preparing activity:
Amy-AR

(Project 4931-A324)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:33Z
Check the source to verify that this is the current version before use.