NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-27/165D
14 February 1995
SUPERSEDING
MIL-T-27/165C
7 January 1991

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TF5R21ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

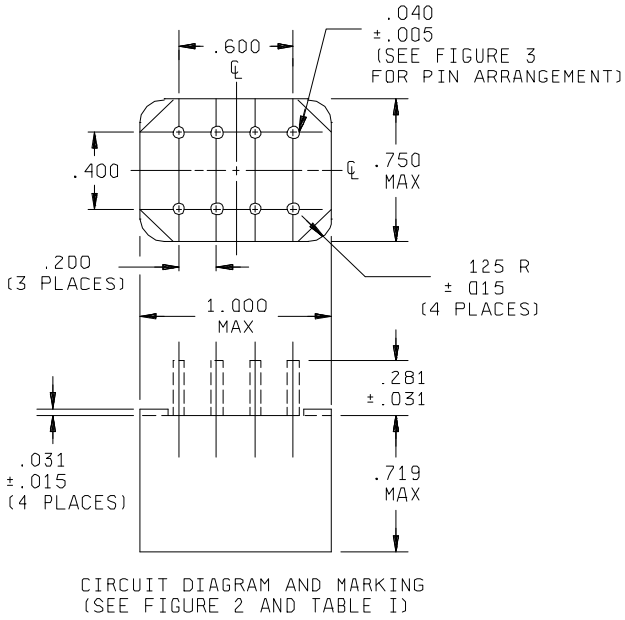

Inches	mm
.005	0.13
.015	0.38
.031	0.79
.040	1.02
.125	3.18
.200	5.08
.281	7.14
.400	10.16
.600	15.24
.719	18.26
.750	19.05
1.000	25.40


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on side(s) and top of case, or both.
4. Unless otherwise specified, the tolerance shall be ±.010 (0.25 mm).

FIGURE 1. Dimensions and configurations.

(D) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

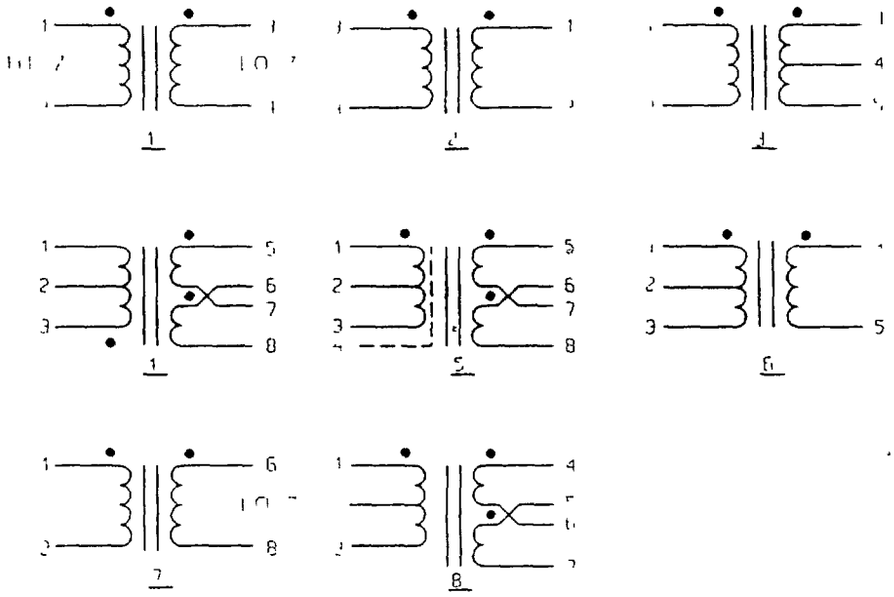

NOTE Dots indicate the same polarity on terminals

FIGURE 2 Circuit diagrams

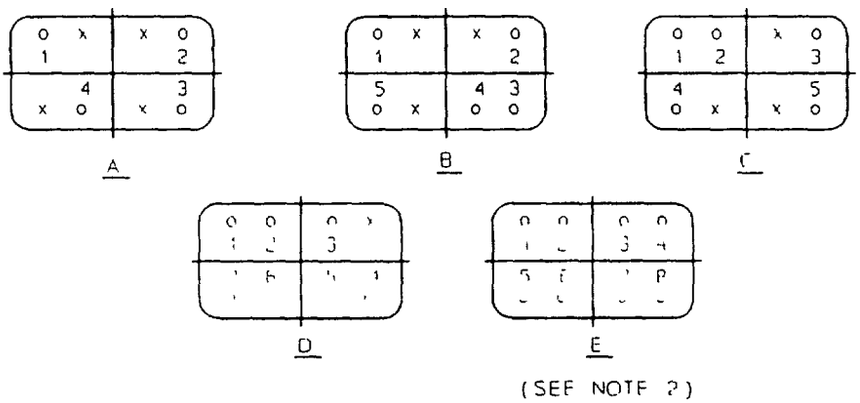

NOTES
1 Pins not used are removed These are indicated by "X"
2 Pin numbers not shown in the circuit diagram (see figure 2) indicates that those pins will be missing

FIGURE 3 Pin arrangement

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings See table I

Working Voltage 175 volts

Frequency range. See table II

Duty cycle Continuous.

Design and construction

Dimensions and configuration. See figure 1

Case Plastic/molded.

Terminals Pin type, .040 inch diameter (1.02 mm) (see figure 3 for pin arrangement)

Material Type LW ( )C5N in accordance with MIL-STD-1276.

Weight 1 0 ounce maximum

Altitude 75,000 feet maximum

Operating temperature range -55°C to +105°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Vibration (high frequency) MIL-STD-202, method 204

Dielectric withstanding voltage Between split sections, 50 volts rms maximum

At sea level: 500 volts, rms.

At reduced barometric pressure: 300 volts, rms

Electrical characteristics

Frequency response: See table II.

Reference frequency. 1 kHz

No load (center tap voltage unbalance only) ±1 percent at 1 volt, 1 kHz across the primary.

Marking location See figure 1

Electrostatic shielding Shielding ratio 5.1 minimum at 20 kHz applicable to circuit diagram 5 only

(D) Part or Identifying Number (PIN) M27/165-(dash number from table I)

NOTE Where dual ratings are specified, only frequency response shall be tested in both modes of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings

Dash 1/ no	Primary 2/ impedance (ohms)	Secondary 2/ impedance (ohms)	Primary DCR ±25% (ohms)	Secondary DCR ±25% (ohms)	Power level (mW)	Primary dc current (mA)	Pin arrange-ment (see figure 3)	Circuit diagram (see figure 2)
01	(1-3) 80 CT 100 CT	32 SPLIT 40 SPLIT	4 9	3 2	250	16	D	8
	(4-7) 32 SPLIT 40 SPLIT	80 CT 100 CT	3 2	4.9	250	25	D	8
02	(6-8) 200	250 k	16	2500	10	0	E	7
	(1-4) 250 k	200	2500	16	10	0	E	7
03	(1-3) 400 CT 500 CT	40 SPLIT 50 SPLIT	20	4.5	250	8	E	4
	(5-8) 40 SPLIT 50 SPLIT	400 CT 500 CT	4 5	20	250	25	E	4
04	(1-3) 400 CT 500 CT	120 SPLIT 150 SPLIT	20	12 5	250	8	E	4
	(5-8) 120 SPLIT 150 SPLIT	400 CT 500 CT	12 5	20	250	14	E	4
05	(1-3) 400 CT 500 CT	400 SPLIT 500 SPLIT	20	45	250	8	E	4
	(5-8) 400 SPLIT 500 SPLIT	400 CT 500 CT	45	20	250	8	E	4
06	(1-3) 500 CT	3 2	15	0.35	250	0	C	6
	(4-5) 3.2	500 CT	0.35	15	250	0	C	6
07	(1-3) 600 CT	600 SPLIT	35	60	250	6	D	8
	(4-7) 600 SPLIT	600 CT	60	35	250	6	D	8

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

TABLE I Electrical ratings - Continued

Dash 1/ no.	Primary 2/ impedance (ohms)	Secondary 2/ impedance (ohms)	Primary DCR ±25% (ohms)	Secondary DCR ±25% (ohms)	Power level (mW)	Primary dc current (mA)	Pin arrange-ment (see figure 3)	Circuit diagram (see figure 2)
08 3/	(5-8) 600 SPLIT	10 k CT	80	1050	200	9	E	5
	(1-3) 10 k CT	600 SPLIT	1050	80	200	4	E	5
09	(1-3) 2 k CT 4 k CT	8 16	290	2	250	4 2	C	6
	(4-5) 8 16	2 k CT 4 k CT	2	290	250	60	C	6
10	(1-4) 2.5 k CT	2.5 k SPLIT	140	300	250	4	E	4
	(5-8) 2.5 k SPLIT	2 5 k CT	300	140	250	4	E	4
11	(1-2) 10 k 25 k	200 500	1225	30	200	3 1.5	A	1
	(3-4) 200 500	10 k 25 k	30	1225	200	21 10	A	1
12	(1-2) 10 k	2 k CT	1000	40	200	1	B	3
	(3-5) 2 k CT	10 k	40	1000	200	2 2	B	3
13 3/	(1-3) 10 k CT 12 k CT	10 k SPLIT 12 k SPLIT	855	1080	200	1	E	5
	(5-8) 10 k SPLIT 12 k SPLIT	10 k CT 12 k CT	1080	855	200	1	E	5
14	(3-4) 10 k	90 k	215	1850	100	0.25	A	2
	(1-2) 90 k	10 k	1850	215	100	0	A	2

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings - Continued.

Dash 1/ no	Primary 2/ impedance (ohms)	Secondary 2/ impedance (ohms)	Primary DCR ±25% (ohms)	Secondary DCR ±25% (ohms)	Power level (mW)	Primary dc current (mA)	Pin arrangement (see figure 3)	Circuit diagram (see figure 2)
15	(1-2) 20 k 30 k	800 1200	450	32	200	0 5	A	1
	(3-4) 800 1200	20 k 30 k	32	450	200	2 5	A	1
16	(1-4) 30 k	50	1850	3.8	200	1	E	7
	(6-8) 50	30 k	3.8	1850	200	24	E	7
17	(1-3) 50 k CT	600 SPLIT	2400	63	250	1	D	8
	(4-7) 600 SPLIT	50 k CT	63	2400	250	9	D	8
18	(1-4) 100 k	60	3400	3.7	200	0.5	E	7
	(6-8) 60	100 k	3.7	3400	200	20	E	7

1/ Dual rating for each dash number indicate that the transformer's winding can be used arbitrarily as primary or secondary

2/ Impedance values written one above the other indicates a range of matching impedances over which the parts will give satisfactory performance as long as the impedance ratio is maintained

3/ Electrostatic shield, shield ratio 5 1 minimum at 20 kHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

TABLE II Electrical characteristics

1/ Dash number	Frequency response at 200 Hz to 20 kHz ±3 dB			Polarity same on terminals (see figure 2)
	Z_S (ohms)	Z_L (ohms)	E_L (ohms)	
01	(1-3) 80 (4-7) 32	32 80	2.8 4 4	1, 4, 5 1, 4, 5
02	(6-8) 200 (1-4) 250 k	250 k 200	50 1.4	1, 6 1, 6
03	(1-3) 400 (5-18) 40	40 400	3.16 10	3, 5, 6 3, 5, 6
04	(1-3) 400 (5-8) 120	120 400	5 5 10	3, 5, 6 3, 5, 6
05	(1-3) 400 (5-8) 400	400 400	10 10	3, 5, 6 3, 5, 6
06	(1-3) 500 (4-5) 3.2	3.2 500	0.9 11	1, 4 1, 4
07	(1-3) 600 (4-7) 600	600 600	12 2 12	1, 4, 5 1, 4, 5
08	(5-8) 600 (1-3) 100 k	10 k 600	45 12	1, 5, 6 1, 5, 6
09	(1-3) 2 k (4-5) 8	8 2 k	1 4 22	1, 4 1, 4
10	(1-4) 2 5 k (5-8) 2 5 k	2.5 k 2.5 k	25 25	3, 5, 6 3, 5, 6
11	(1-2) 10 k (3-4) 200	200 10 k	6.3 40	1, 3 1, 3
12	(1-2) 10 k (3-5) 2 k	2 k 10 k	20 40	1, 3 1, 3
13	(1-3) 10 k (5-8) 10 k	10 k 10 k	45 45	1, 5, 6 1, 5, 6
14	(3-4) 10 k (1-2) 90 k	90 k 10 k	95 30	1, 3 1, 3
15	(1-2) 20 k (3-4) 800	800 20 k	12.6 60	1, 3 1, 3
16	(1-4) 30 k (6-8) 50	50 30 k	3.16 77	1, 6 1, 6
17	(1-3) 50 k (4-7) 600	600 50 k	12.2 110	1, 4, 5 1, 4, 5
18	(1-4) 100 k (6-8) 60	60 100 k	3 4 170	1, 6 1, 6

(D) 1/ Qualification testing and approval to M27/165-12 shall be sufficient to grant qualification approval to M27/165-01 through M27/165-18

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, ME, MI
Navy - AS, MC, OS, SH
Air Force - 17, 19, 99
DLA - ES

Preparing activity.
Army - ER

Agent
DLA - ES

(Project 5950-0864)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.