INCH-POUND

MIL-T-27/159A
20 April 1993
SUPERSEDING
MIL-T-27/159
10 May 1977

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, POWER, TF5S04ZZ

(A) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-T-27


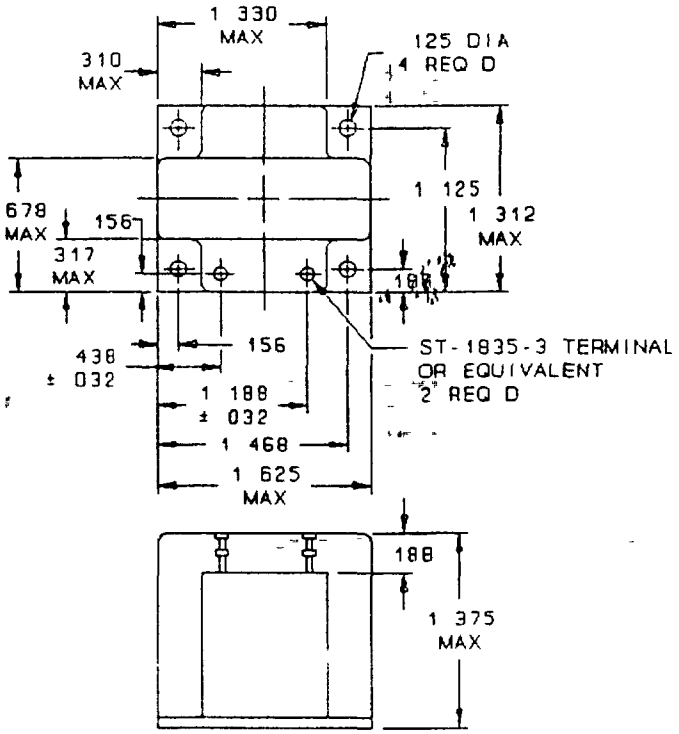


FIGURE 1 Dimensions and configurations

(A) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

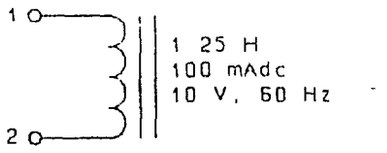

ALTITUDE 100 kFT MAX

WORKING VOLTAGE (PEAK) 357 V

CIRCUIT DIAGRAM AND MARKING

Inches	mm
016	0 41
.032	0 81
125	3 18
156	3 96
188	4 78
310	7 87
317	8 05
438	11 13
678	17 22
1 125	28 58
1 188	30 18
1 312	33 32
1 330	33 78
1 375	34 92
1 468	37 29
1 625	41 28

NOTES.
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance on all dimensions shall be ±0 16 inch (41 mm).
4 Marking shall be on the side of the case

FIGURE 1 Dimensions and configurations - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Inductance (1-2) 1 25 H minimum

Voltage (1-2) 10 volts, 60 Hz

Current (1-2) 100 mA dc

DC resistance (1-2) 120 ohms maximum

Working voltage (peak) 357 volts

Power 1 1 watts

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Weight 136 grams, maximum

Terminals Solder terminal, ST-1835-3 or equivalent

Height 188 inch ± 016

Altitude 100,000 feet maximum

Operating temperature range -55°C to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Vibration (high frequency) MIL-STD-202, method 204

Dielectric withstanding voltage
At sea level 1,000 V rms
At barometric pressure 447 V rms

Electrical characteristics

Inductance With 10 volts, 60 Hz across (1-2) and 100 mA dc applied to (1-2) the inductance shall be 1.25 H minimum

Temperature rise 45°C with 10 volts, 60 Hz, 100 mA dc applied to (1-2) at an ambient temperature of 85°C

(A) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet.

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

Marking location See figure 1

Part or Identifying Number (PIN) M27/159-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.