

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE) INDUCTION, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

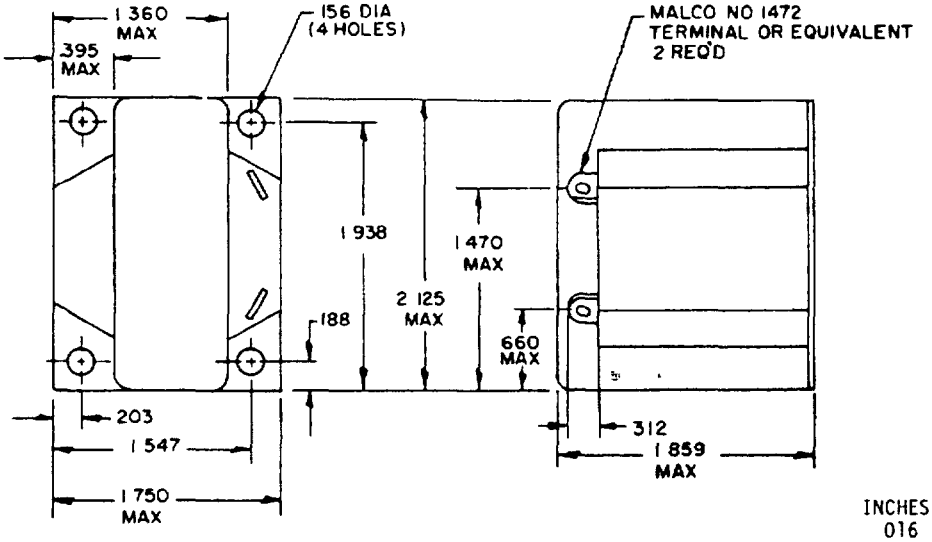



ALTITUDE: 70 kFt MAX
WORKING VOLTAGE (PEAK): 1070 V

CIRCUIT DIAGRAM AND MARKING

INCHES	MM
016	.41
.156	3 96
.188	4 78
.203	5 16
312	7 92
.395	10 03
.660	16 76
1 360	34 54
1 470	37 34
1.547	39.29
1 750	44 45
1 859	47 22
1 938	49 23
2 125	53 98

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3 Unless otherwise specified, tolerance on overall case dimensions is ±.016 inch (41 mm)
4 Marking shall be on the side of the case

FIGURE 1 Dimensions and configuration

(A) denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings
- Inductance (1-2) 1.0 H, minimum
- Voltage (1-2) 10 volts, 60 Hz.
- Current (1-2) 200 mAdc
- DC resistance (1-2) 69 ohms, maximum.
- Working voltage (peak) 1,070 volts
- Power 2.2 W.

Design and construction
- Dimensions and configuration See figure 1.
- Duty cycle Continuous.
- Case Encapsulated.
  - Material Epoxy
- Terminals Solder terminal, Malco No. 1472 or equivalent.
  - Height 0.312 inch ±0.016.
- Weight 408 grams, maximum
- Altitude 70,000 feet, maximum.
- Operating temperature range -55°C to +130°C.

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds.

Vibration (high frequency) MIL-STD-202, method 204

Dielectric withstanding voltage:
- At sea level 2,500 volts rms.
- At barometric pressure 1337.5 volts rms.

Electrical characteristics
- Inductance With 10 volts, 60 Hz across (1-2), and 200 mAdc applied to (1-2) the inductance shall be 1.0 H minimum

Temperature rise 45°C with 10 volts, 60 Hz, 200 mAdc applied to (1-2) at an ambient temperature of 85°C.

Marking location See figure 1

Part number M27/160-01.

istodians
Army - ER
Navy - EC
Air Force - 85

view activities
Army - AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

er activities
Army - ME
Navy - MC, AS
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0569-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-27/160A TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE) INDUCTION, POWER, TF5S04ZZ

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

3 RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.

D

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
IALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-R-S
Fort Monmouth, NJ 07703

D

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:41Z
Check the source to verify that this is the current version before use.