INCH POUND

MIL-T-27/163D
W/AMENDMENT 1
20 May 2022
SUPERSEDING
MIL-T-27/163D
8 June 2012


MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTORS, AUDIO FREQUENCY, HIGH Q

Inactive for new design after 20 April 1993

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the product described herein shall consist of this document and the latest issue of specification MIL-PRF-27.

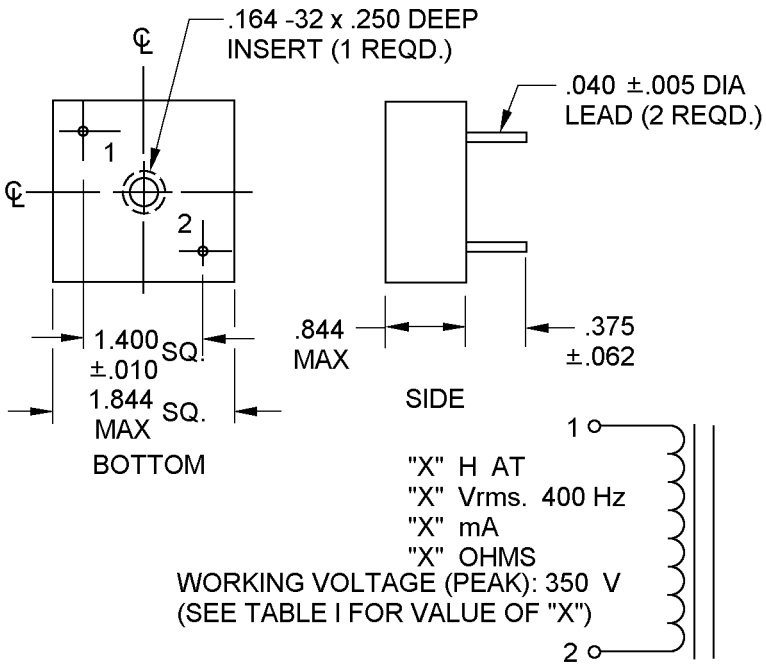

CIRCUIT DIAGRAM AND MARKING

FIGURE 1. Dimensions and configurations.

AMSC N/A

FSC 5950

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

Inches	mm
.005	0.13
.010	0.25
.040	1.02
.062	1.57
.164	4.17
.250	6.35
.375	9.32
.844	21.44
1.400	35.56
1.844	46.84

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case opposite terminal pins.
4. Electrical values shall be marked as specified in table I as applicable.
5. Insert is located on bottom of the inductor with the terminals.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Working voltage (peak): 350 volts.

Temperature coefficient (-55°C to +105°C): ±1.5 percent.

Design and construction:

Dimensions and configuration: See figure 1.

Case: Encapsulated.

Material: Epoxy.

Terminals: Type N-4, tin-lead plated, in accordance with MIL-STD-1276.

Diameter: .040 inch, ±.005.
Length: .375 inch, ±.062.

Weight: 170 grams, maximum.

Operating temperature range: -55°C to +105°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

Terminal strength: MIL-STD-202-211, test condition A, 2 pounds.

TABLE I. Electrical ratings.

Dash no	Inductance H ±1% (1-2)	Current 1/ mA (1-2) (max)	Voltage V rms (1-2)	DC resistance ohms (max) (1-2)	Quality Factor	
					(Minimum)	Test condition
01	0.1	60	1 at 400 Hz	4.2	210	1 V rms 3 kHz
02	0.5	25	1 at 400 Hz	23	185	1 V rms 3 kHz
03	1.0	18	1 at 400 Hz	43	185	1 V rms 3 kHz
04	2.0	12	1 at 400 Hz	92	140	1 V rms 2 kHz
05	5.0	8	1 at 400 Hz	240	120	1 V rms 1.5 kHz
06	10.0	6	1 at 400 Hz	440	95	1 V rms 1 kHz

1/ The amount of dc current that will reduce the inductance a maximum of 7 percent.

Vibration (high frequency): MIL-STD-202-204.

Dielectric withstanding voltage (at sea level): 1,000 V rms.

Electrical characteristics:

Inductance: The inductance in table I is measured with 1.0 V rms, 400 Hz across (1-2) and 0 A dc applied to (1-2).

VERIFICATION:

Qualification inspection: Not applicable for this specification sheet.

Conformance inspection: Groups A and B tests of MIL-PRF-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/163-(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202-204 MIL-STD-202-211 MIL-STD-1276

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA – CC

Review activities:
Army - AR
Navy – AS, MC, OS
Air Force - 19

Preparing activity:
DLA - CC

(Project 5950 2022-046)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:42Z
Check the source to verify that this is the current version before use.