When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS
5940

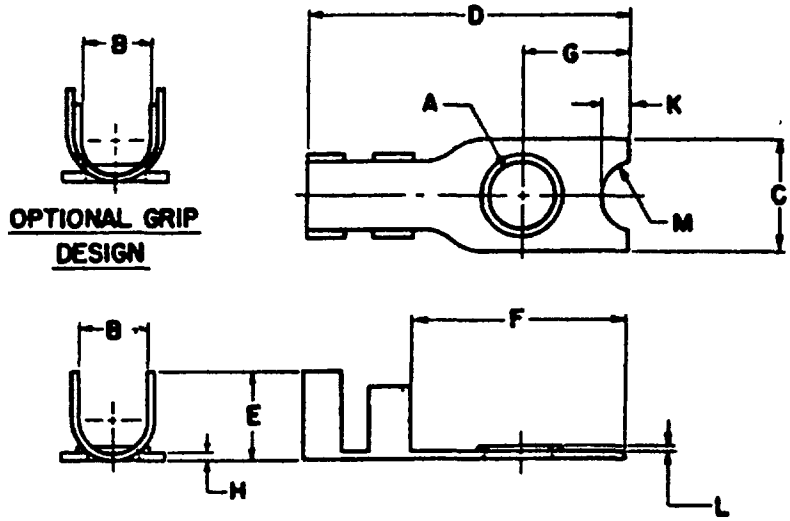


| DASH NO | FIIN | WIRE SIZE AWG NOM | STUD SIZE | A HOLE DIA MIN | A HOLE DIA MAX | B | C | D | E | F | G | H ±.003 | K | L | M DIA |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 151-9360 | 10 | 6 | .141 | .153 | 1/8 | 1/4 | 49/64 | 11/64 | 13/32 | 3/16 | .025 | 1/64 | 1/64 | 9/64 |
| 2 | 151-9368 | | 8 | .167 | .179 | | 5/16 | 15/16 | 9/32 | 19/32 | | .030 | 11/64 | 3/64 | 7/32 |
| 3 | | 8 | 6 | .141 | .153 | 5/32 | 1/4 | 3/4 | 3/16 | 1/2 | 1/4 | .025 | 1/16 | 1/64 | 5/32 |

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

NOTES: 1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL ±1/64 UNLESS OTHERWISE SPECIFIED.

2. REMOVE ALL BURRS.

3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

AMSC N/A 5 July 55 REVISED A 23 JULY 56

CONTROLLING: Ord, Navy, USAF
OTHER INT.: A- Sig TE, B- A Or Y, M-
PROCUREMENT SPECIFICATION: MIL-T-15659
SUPERSEDING:

# MILITARY STANDARD
## TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, INSULATION GRIP, ONE-HOLE, LOCATING

MS35437

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:23Z
Check the source to verify that this is the current version before use.