FED. SUP. CLASS
5320

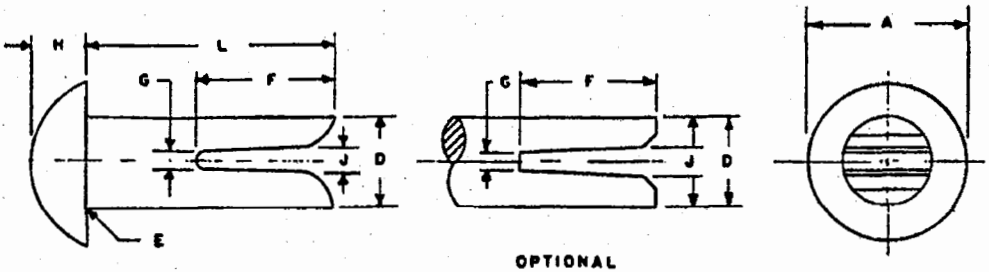

OPTIONAL

NOMINAL SIZE		1/8 (.125)			9/64 (.140)			5/32 (.187)		
BODY DIAMETER D	MAX	0.127			0.152			0.195		
	MIN	.113			.135			.180		
HEAD DIAMETER A	MAX	.224			.318			.350		
	MIN	.213			.306			.337		
HEAD THICKNESS H	MAX	.037			.052			.064		
	MIN	.026			.038			.050		
FILLET RADIUS E		.016			.020			.025		

LENGTH L	DASH NO.	SLOT WIDTH AT BASE G	SLOT WIDTH AT POINT J	SLOT DEPTH F	DASH NO.	SLOT WIDTH AT BASE G	SLOT WIDTH AT POINT J	SLOT DEPTH F	DASH NO.	SLOT WIDTH AT BASE G	SLOT WIDTH AT POINT J	SLOT DEPTH F
1/4	1	0.040	0.052	0.219	9	0.050	0.073	0.219	17	0.065	0.120	0.219
5/16	2	.040	.057	.251	10	.050	.076	.251	18	.065	.125	.281
3/8	3	.040	.057	.312	11	.050	.081	.328	19	.065	.127	.312
7/16	4	.040	.057	.312	12	.050	.083	.344	20	.065	.130	.375
1/2	5	.040	.057	.312	13	.052	.077	.391	21	.066	.133	.437
9/16	6	.040	.057	.312	14	.052	.077	.391	22	.068	.133	.437
5/8	7	.040	.057	.312	15	.052	.077	.391	23	.066	.133	.437
3/4	8	.040	.057	.312	16	.052	.077	.391	24	.068	.133	.437

NOTES:

1. MATERIAL: Steel, carbon, AISI Nos. 1005 thru 1022 per Federal Standard No. 66.
2. PROTECTIVE COATING: Uncoated.
3. HARDNESS: Maximum Rockwell Hardness of rivets shall be B60 as measured on side of shank.
4. DIMENSIONS: All dimensions are in inches.
5. TOLERANCES: Length - ±0.015; width of slot - ±0.005; depth of slot - ±0.015, unless otherwise specified.
6. PART NUMBERS: The MS part number consists of the MS number plus the dash number. Example: MS35684-1.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitations for bid.
9. A washer should be used under the split end of the rivet when riveting soft materials.
10. The bearing surface of oval head rivets shall be at right angles with the axis of the rivet shank within two degrees.

APPROVED 3 JAN 56 REVISED (A) 14 MAR 1969

(A) ENTIRE STANDARD REVISED

P.A.	TITLE	MILITARY STANDARD
Other Cust 05 52	RIVET, SPLIT — OVAL HEAD, STEEL	MS 35684
PROCUREMENT SPECIFICATION FF-R-556	SUPERSEDES	SHEET 1 OF 1

Source: https://assist.dla.mil -- Downlo
Check the source to verify that this is th