W-57-09

FED. SUP CLASS
6630

USER ACTIVITIES: ARMY - CE
NAVY - MC

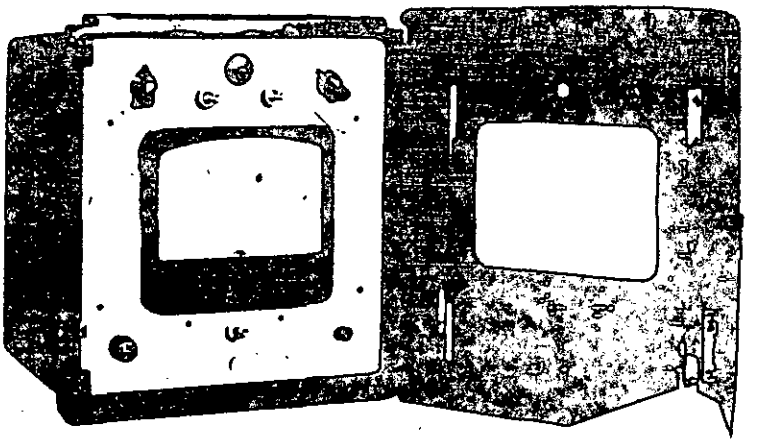

PART NUMBER | pH

CANCELLED

CANCELLED AFTER 28 JAN 1982 , NO SUPER-

SEDING STANDARD

...e case shall be moisture and splash-proof. ... the face of the chassis with the dial gage ...sis shall be mounted on tracks inside the case to ... and maintenance. Meter shall have the following limits ... 0.07 pH unit, porm 5 mv on the 700 mv range, and porm 10 mv ...0 mv range. Scale shall be graduated in 0.1 pH, 5 mv, and 10 mv ...ions.

...E: To continuously monitor a flow system for pH or oxidation-reduction potentials.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

APPROVED 28 JAN 1982 REVISED

CANCELLED

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-812/A-2123

This military standard is approved by the De... mandatory on all activities. Selection for all ... applications and for competitive use shall be ...

P.A. MU	TITLE	MILITARY STANDARD
Other Cust MS 82	METER, HYDROGEN ION TEST Panel	MS36468
Procurement Specification NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672 (Coordinated)

0819

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:41Z
Check the source to verify that this is the current version before use.