FED. SUP CLASS
6640

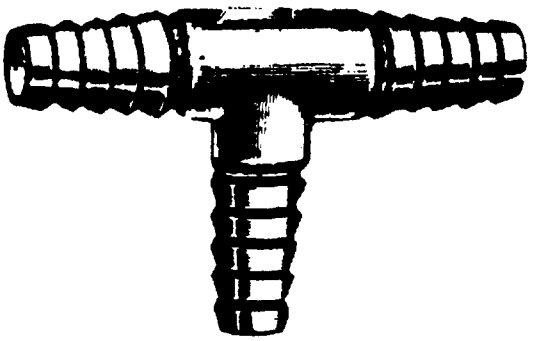

PART NUMBER	NOMINAL OVERALL LENGTH (in.) TOP ARM	LOWER ARM TO TOP JUNCTION	NOMINAL WALL THICKNESS (in.)
MS 36600-1	4-1/2	1-15/16	0.032

MATERIAL: Nylon, polypropylene or other plastic material.

A DESIGN: Connector shall be T-shaped with serrated ends. It shall operate on any combination of 3/16, 1/4, 5/16, 3/8 or 7/16 inch inside diameter tubing.

All arms of the connector shall have an outside diameter of 1/4 inch at the end and shall taper up through five steps to a maximum diameter of 5/8 inch.

A NOTES:
1. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
2. FSCMs: 05178 and 22527

USER ACTIVITIES: ARMY - CE, ME, MI

REVIEWER ACTIVITIES: ARMY - MD
AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisitions now should be made from this document.

APPROVED 20 SEP 1968 REVISED (A) 10 MAR 1988

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA (Other Cust) MS 99		CONNECTOR, ELASTIC TUBING, BRANCHED	MS36600
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1460-4
REVISION

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:44Z
Check the source to verify that this is the current version before use.