FED. SUP CLASS
4730

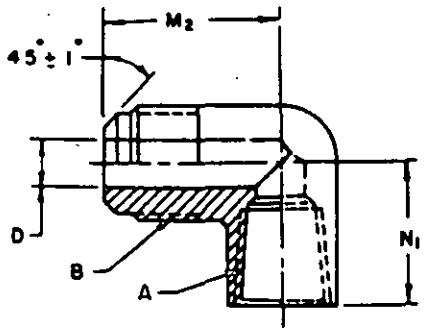

DASH NO.	TUBE O.D.	A PIPE THREAD NPTF	B STRAIGHT THREAD	D DIA DRILL	M2 LENGTH ±.03	N1 LENGTH ±.03
-1	1/8	1/8	.312-24UNF-2A	0.078	0.75	0.42
-2	3/16	1/8	.375-24UNF-2A	0.125	0.81	0.44
-3	1/4	1/8	.438-20UNF-2A	0.188	0.88	0.47
-4	5/16	1/8	.500-20UNF-2A	0.219	0.94	0.47
-5	3/8	1/4	.625-18UNF-2A	0.281	1.09	0.69
-6	7/16	1/4	.688-16UN-2A	0.312	1.12	0.72
-7	1/2	3/8	.750-16UNF-2A	0.406	1.28	0.75
-8	5/8	1/2	.875-14UNF-2A	0.500	1.50	1.00
-9	3/4	1/2	1.062-14UNS-2A	0.625	1.62	1.06
-10	7/8	3/4	1.250-12UNF-2A	0.750	1.88	1.12
-11	1	1	1.375-12UNF-2A	0.875	2.06	1.38

Material: Brass in accordance with (1) QQ-B-626, alloy 360, temper half hard or SAE UNS C36000, half hard or (2) QQ-B-626, alloy 377, or SAE UNS C37700.

Protective coating: None.

Dimensions and tolerances: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for 45° Flared Type Tube Fittings (SAE J512). Unless otherwise specified all dimensions are in inches.

Threads: Threads shall be in accordance with FED-STD-H28.

Part number: The MS part number consists of the MS number plus the dash number.
Example: MS39161-1.

NOTES:

1. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
2. Referenced documents shall be of the issue in effect on date of invitations for bids, or request for proposal, except that referenced adopted industry documents shall give the date of the issue adopted.
3. The illustration is for identification and is not intended to restrict designs and shapes not dimensioned.

Ⓔ CANCELLED - FOR PROCUREMENT USE
SAE J512-80

APPROVED 3 APR 62 REVISED Ⓐ 27 FEB 67 Ⓑ 22 OCT 69 Ⓒ 26 SEP 75 Ⓓ 15 JUN 82 Ⓔ 10 MAR 87

User activities: Army - GL, Navy - OS
Review activities: Army - AT, MI, DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. ME Other Cust	INTERNATIONAL INTEREST	TITLE: ELBOW, PIPE TO TUBE, 90°, FEMALE PIPE END, 45° FLARED TYPE, AUTOMOTIVE	MILITARY STANDARD MS39161
PROCUREMENT SPECIFICATION MIL-F-1224	SUPERSEDES: ORDNANCE ENGINEERING STANDARD CNAX3 IN PART		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

4730-0335

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:47Z
Check the source to verify that this is the current version before use.