FED. SUP CLASS
8120

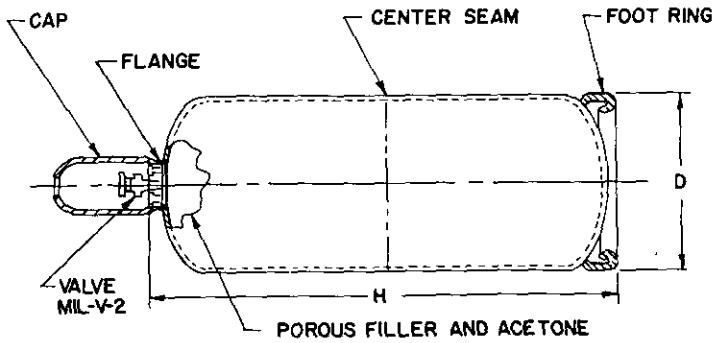

DASH NO.	NOM. CAPACITY CU. FT.	OUTSIDE DIMENSIONS		F	CAP	DOT SPECIFICATION
		D	H			
-1	10	4 ± 1/2	12 ± 1			8 OR 8AL
-2	40	6 ± 1/2	19 ± 1-1/2			8 OR 8AL
-3	50	7 ± 3/4	22 ± 1-1			8 OR 8AL
-4	225	12 ± 1	29 ±		-2	8 OR 8AL

NOTES:

1. ALL DIMENSIONS ARE IN INC
2. FOOTRINGS, WHEN REQU IN UPRIGHT POSITIONS, DRAINAGE HOLES, EQ USED TO STABLIZE CYLINDERS ENTILATION HOLES AND 2
3. THE MS PART NUMB NUMBER. HEET NUMBER PLUS THE DASH
4. FOR DESIGN FE/ MENT DOCUMF RD TAKES PRECEDENCE OVER PROCURE-
5. REFERENCF FOR BID. E ISSUE IN EFFECT ON DATE OF INVITATIONS
6. UNIT SH ED CONCAVE BOTTOM HEAD SHALL BE ACCEPTABLE.
7. FOR " LING OF THE FOOTRING SHALL BE PERMITTED.
8. WP T f. CYLINDERS SHALL BE SUPPLIED WITH 3/8 - 18 NGT GE. PROVISION SHALL BE MADE FOR A SAFETY DEVICE ED.
9. W. HALL NOT BE REQUIRED FOR 10 AND 40 CU. FT. CYLINDERS.
10. SEAMS DOT.

(B) CANCELLED AFTER 31 MARCH 1975
USE MIL-C-3701 B

(A) ENTIRE STANDARD REVISED

APPROVED 16 APRIL 1963 REVISED (A) 23 JANUARY 1969 (B) 31 MARCH 1975

REVIEW ACTIVITIES: MI, YD, MC
USER ACTIVITIES

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY-ME Other Cust NAVY-SH A. F.-68	TITLE: CYLINDER, COMPRESSED GAS, DOT SPECIFICATION 8 OR 8AL FOR ACETYLENE	MILITARY STANDARD MS 39227
PROCUREMENT SPECIFICATIONS: MIL-C-3701	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.