FED. SUP CLASS
4730

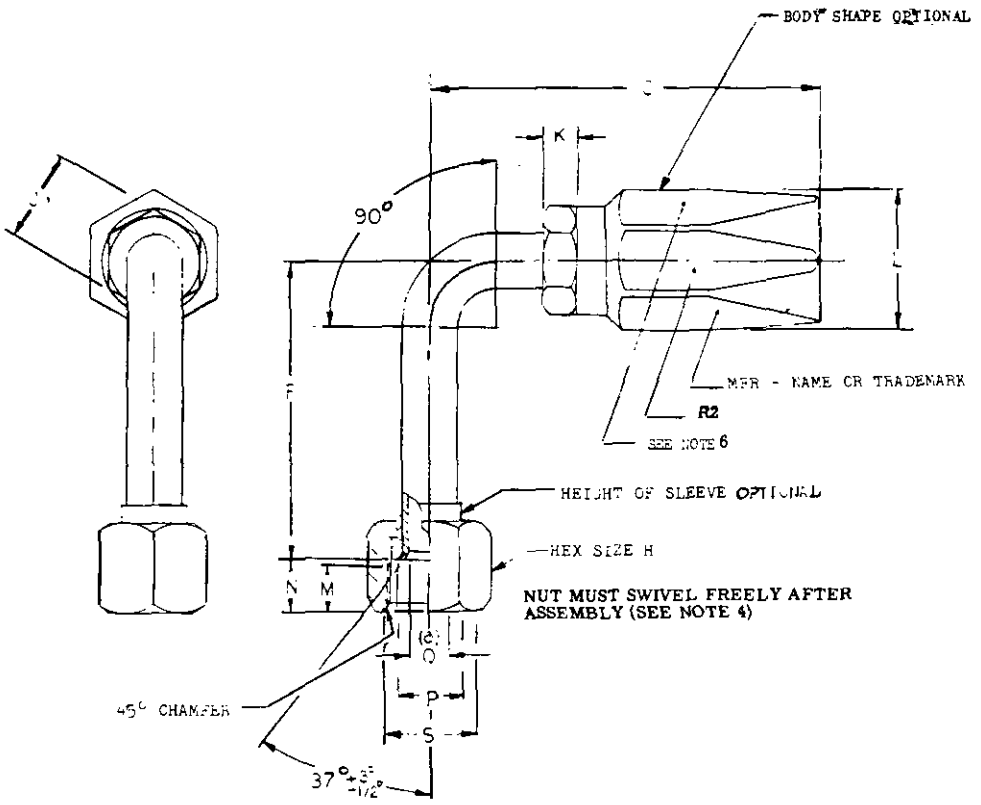

(a) DIMENSION P TO BE CONCENTRIC WITH DIMENSION Q WITHIN 0.015 FULL INDICATOR READING

TABLE I. DIMENSIONS FOR "EP" COUPLINGS

TURE DASH NO.	HOSE DASH NO.	HOSE I.D. REF	NOM SIZE & THD/IN	H	K MIN	L MAX	M MIN	.005 -.000	Q MIN	C MAX	S MIN	F +.062 -.000	J MIN
-5	-4	1/4	1/2-20	.625	.19	.59		.355	.156	2.80	.50	1.80	.43
-6	-6	3/8	9/16-18	.688	.22		.75	.435	.260	3.11	.56	2.18	.50
-8	-8	1/2	3/4-16	.875	.31			.422	.570	.380	3.65	.75	2.43	.62
-10	-8	1/2	7/8-14	1.000			.61	.500	.680	.380	3.87	.87	2.57	.75
-12	-12	3/4	1-1/16-12	1.250			.469	.562	.850	.600	4.41	1.06	3.73	.87

(B) CANCELLED AFTER 25 OCTOBER 1978 for future procurement use MIL-F-52525/4

(A) ENTIRE STANDARD REVISED

REVIEW ACTIVITIES:
USER ACTIVITIES: MU, WC, 82

APPROVED 26 AUGUST 1966 REVISED (A) 28 DECEMBER 1970 (B) 25 October 1978

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, SCREW-ON, PRESSURE TYPE, FEMALE, SWIVEL, 37° FLARE, 90° BENT TUBE, LONG DROP, DOUBLE WIRE BRAID HOSE.	MILITARY STANDARD MS39293
PROCUREMENT SPECIFICATION MIL-C-52525	SUPERSEDES:	SHEET 1 OF 3

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/5302

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:50Z
Check the source to verify that this is the current version before use.