FED. SUP CLASS
4730

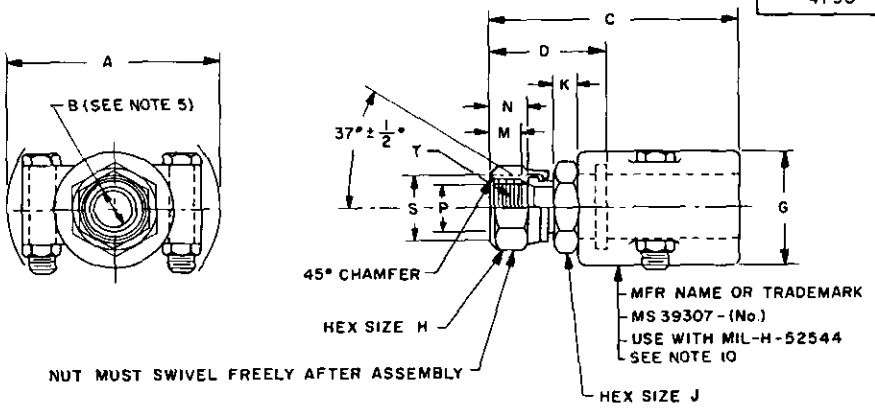

DIMENSIONS FOR 3/4 - INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	T NOM THREAD SIZE	A MAX	B MIN	C MAX	D MAX	G MAX	H HEX	J HEX
-12	.750	1-1/16-12	3.000	.600	3.375	1.796	1.57	1.250	1.250

DASH NO.	K MIN	M MIN	N ±.031	P ±.005	S MIN	MAX WOR'	ING TQUE
-12	.38	.469	.562	.850	1.08		50 IN. LBS

CANCELLED After 31 October 1972
NO SUPERSEDING STANDARD

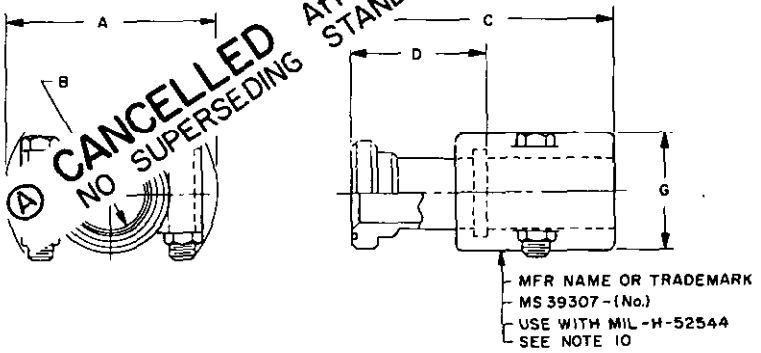

DIMENSIONS FOR 1-INCH THROUGH 4-INCH COUPLINGS

DASH NO.	HOSE I.D. (REF)	A MAX	B MIN	C MAX	D MAX	G MAX	MAX WORKING PRESS.
-16	1.00	4.000	.810	4.250	1.940	2.060	250
-20	1.25	4.625	1.040	5.250	2.000	2.630	200
-24	1.50	5.000	1.250	6.130	2.250	2.940	150
-32	2.00	5.250	1.730	6.630	2.250	3.500	100
-40	2.50	5.500	2.188	4.907	2.500	3.563	62
-48	3.00	6.188	2.750	5.500	2.844	4.063	55
-56	3.50	6.375	3.250	5.625	2.938	4.500	50
-64	4.00	7.375	3.750	5.750	2.938	5.250	50

P.A. ME Other Cust	TITLE COUPLING, HOSE: REUSABLE, HYDRAULIC, OIL SUCTION, 2-BOLT CLAMP-ON, STRAIGHT	MILITARY STANDARD MS39307 (ME)
PROCUREMENT SPECIFICATION MIL-C-52545	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 4 May 1967 REVISED (A) 31 OCTOBER 1972

This military standard is approved by Mobility Equipment Command, Department of the Army and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Review activity: MC
User activity: AT

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:51Z
Check the source to verify that this is the current version before use.