FED. SUP. CLASS
4730

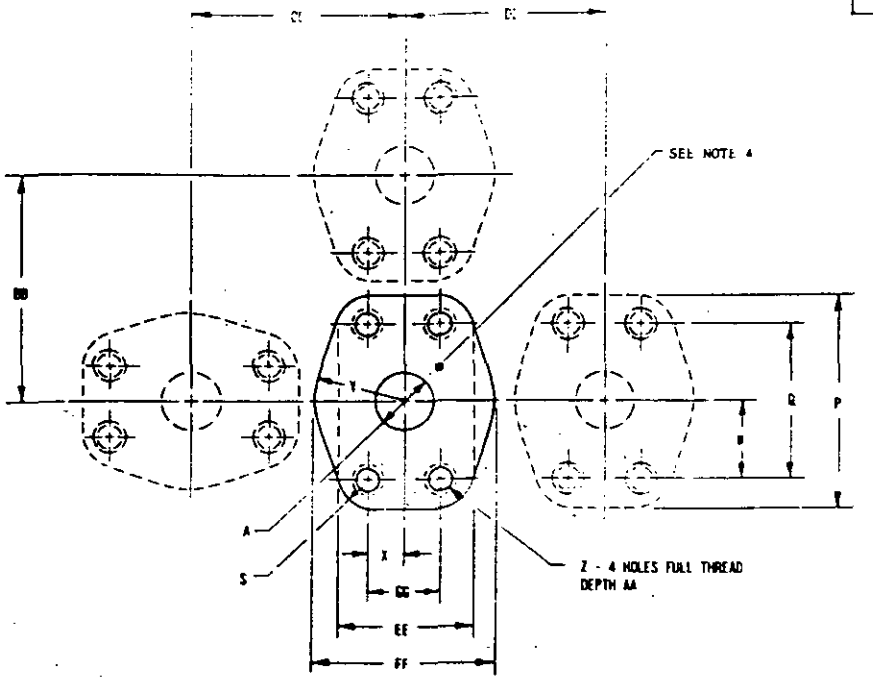

Ⓐ

PORT DIMENSIONS FOR BOLTED FLANGE CONNECTIONS 0-3000 PSI WORKING PRESSURE (EXCEPT AS NOTED)

Ⓐ

NOMINAL FLANGE SIZE	A DIA +.000 -.006	P ±0.016	FF ±0.016	Q ±.010	GG ±.010	S RADIUS	W ±0.016	X ±0.016	Y RADIUS	Z THREAD UNC-2B	AA MIN	BB MIN	CC MIN	DD MIN	EE MIN
1.000	1.000	2.750	2.313	2.063	1.031	.344	1.031	.516	1.156	3/8-16	.875	2.844	2.625	2.406	1.875
1.250	1.250	3.125	2.875	2.313	1.188	.406	1.156	.594	1.438	7/16-14	1.125	3.219	3.094	2.969	2.125
1.500	1.500	3.688	3.250	2.750	1.406	.469	1.375	.703	1.625	1/2-13	1.063	3.781	3.563	3.344	2.500
2.000	2.000	4.000	3.813	3.063	1.688	.469	1.531	.844	1.906	1/2-13	1.063	4.094	4.000	3.906	3.000
*2.500	2.500	4.500	4.281	3.500	2.000	.500	1.750	1.000	2.141	1/2-13	1.188	4.594	4.500	4.375	3.500
**3.000	3.000	5.313	5.156	4.188	2.438	.563	2.094	1.219	2.578	5/8-11	1.188	5.406	5.344	5.250	4.188

* 7500 PSI WORKING PRESSURE MAX
** 2000 PSI WORKING PRESSURE MAX

NOTES:
1. ALL DIMENSIONS IN INCHES.
2. DIMENSIONS ## ---

FLANGES.
FLANGES
MINIMUM

Ⓑ Cancelled after 19 October 1981
For future procurement use
SAE J518

--- MARKS OF TC

---ANT STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

REVIEW ACTIVITIES:
USER ACTIVITIES: MU, WC, AZ

APPROVED 3 March 1967 REVISED Ⓐ 29 DECEMBER 1970 Ⓑ 19 October 1981

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND REPAIR APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ARMY - ME Other Cust NAVY - SH	TITLE PORT, MOUNTING FACE DIMENSIONS HYDRAULIC, 4-BOLT SPLIT-FLANGE TYPE HOSE AND TUBE CONNECTIONS, 0 TO 2,000; 2,500; AND 3,000 PSI	MILITARY STANDARD MS 39314
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Overprinted) *Previous editions of this form are obsolete.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 505-022/8446

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.