REVIEW ACTIVITIES:

USER ACTIVITIES:

APPROVED 3 March 1967 . REVISED (A) 29 DECEMBER 1970 (B) 19 October 1981

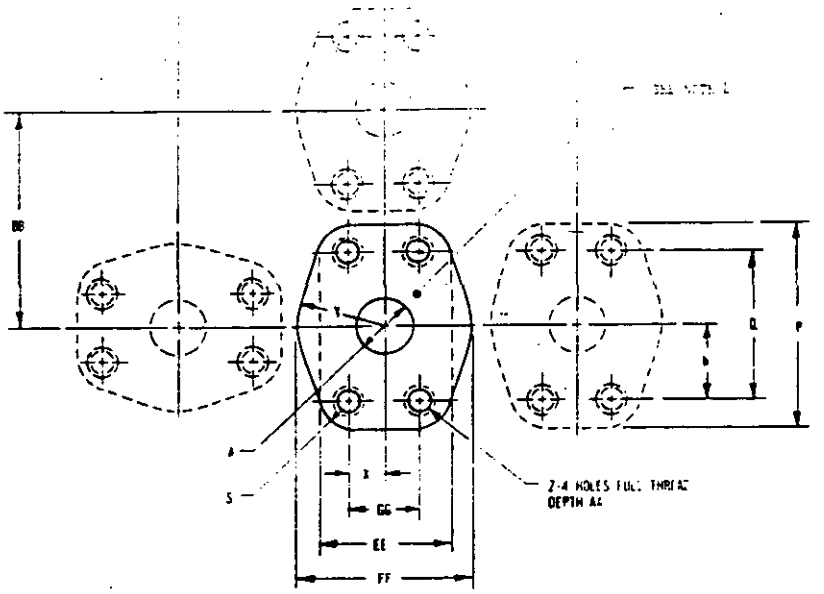

PORT DIMENSIONS FOR BOLTED FLANGE CONNECTIONS 3000-6000 PSI WORKING PRESSURE

NOMINAL FLANGE SIZE	A DIA +.000 -.060	P ±0.016	FF ±0.016	Q ±.010	GG ±.010	S RADIUS	W ±0.016	X ±0.016	Y RADIUS	Z THREAD UNC-2B	AA MIN	BB MIN	CC MIN	DD MIN	EE MIN
1.000	1.000	3.188	2.750	2.250	1.094	.489	1.125	.547	1.375	7 16-14	1.067	3.312	3.156	2.969	2.125
1.250	1.250	3.750	3.062	2.625	1.250	.562	1.312	.625	1.531	1 7-13	1.000	3.875	3.562	3.250	2.375
1.500	1.500	4.438	3.750	3.125	1.438	.656	1.562	.719	1.875	5 8 11	1.375	4.562	4.250	3.969	2.750
2.000	2.000	5.250	4.500	3.812	1.750	.719	1.906	.875	2.250	3 4-10	1.500	5.375	5.031	4.719	3.375

NOTES

1. ALL DIMENSIONS IN INCHES.
2. DIMENSIONS BB, CC, & DD PROVIDE 1/16 INCH MINIMUM CLEARANCES BETWEEN FLANGES. DIMENSIONS APPLY ONLY WHEN FLANGES ARE OF THE SAME SIZE. WHEN FLANGES DIFFER, PORTS SHALL BE SPACED TO PROVIDE A 1/16 INCH MINIMUM

FACE

MARKS UP TO

AT MINIMUM.

(B) Cancelled after 19 October 1981
For future procurement use
SAE J518

(A) NO TECHNICAL CHANGE

P.A. ARMY - MI	TITLE	MILITARY STANDARD
Other Cust	PORT, MOUNTING FACE DIMENSIONS HYDRAULIC, 4-BOLT SPLIT-FLANGE TYPE HOSE AND TUBE CONNECTIONS, 3,000 TO 6,000 PSI	MS 39315
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆U.S. GOVERNMENT PRINTING OFFICE: 1981 — 506-022/6477

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.