FED. SUP CLASS
3820

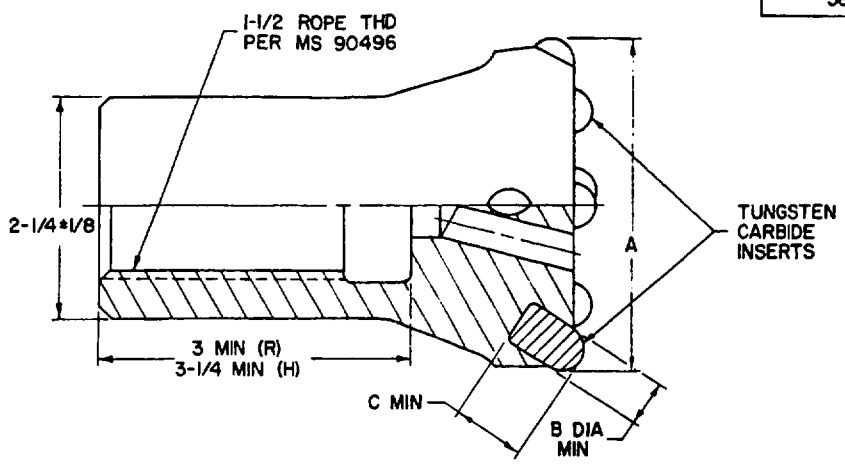


| Dash no. | Dia. A | Dia. B | Dim. C (R) | Dim. C (H) |
|---|---|---|---|---|
| -1 | 2-1/2 | 7/16 | 5/8 | 1 |
| -2 | 2-3/4 | 7/16 | 5/8 | 1 |
| -3 | 3 | 7/16 | 5/8 | 1 |
| -4 | 3-1/2 | 7/16 | 5/8 | 1 |
| -5 | 4 | 1/2 | 3/4 | 1 |

NOTES:

1. Configuration of body shall be for reference only.
2. There shall be a minimum of four air blow holes.
3. There shall be a minimum of nine tungsten carbide button inserts of which not less than six inserts shall be located on the gauge circumference.
4. Brazing material when used shall conform to MIL-D-22233.
5. Minimum load required to remove inserts shall be 4200 lbs.
6. Requirement options for (R) regular or (H) heavy duty bits.
7. Material of body shall be hardened alloy steel.
8. Minimum body hardness shall be 40 Rockwell C.
9. Minimum face hardness shall be 36 Rockwell C.
10. Thread shall be turned parallel to centerline and concentric with .010 inch of gauge circumference.
11. All dimensions are in inches.
12. Unless otherwise specified linear tolerance shall be ± 1/64 inch.
13. For design feature purposes this standard takes preference over procurement documents referenced herein.
14. Reference documents shall be of the latest issue in effect on date of invitation for bid.

REVIEW ACTIVITIES:
USER ACTIVITIES MC

APPROVED 24 AUGUST 1970 REVISED

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

| | | |
|---|---|---|
| P.A. ARMY ME<br>Other Cust NAVY YD<br>AIR FORCE 84 | TITLE<br>BIT, BUTTON, ROCK DRILL;<br>FOR DRIFTER DRILLS | MILITARY STANDARD<br>MS 39335 |
| PROCUREMENT SPECIFICATIONS<br>MIL-D-22233 | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:51Z
Check the source to verify that this is the current version before use.