FED SUP CLASS
2805

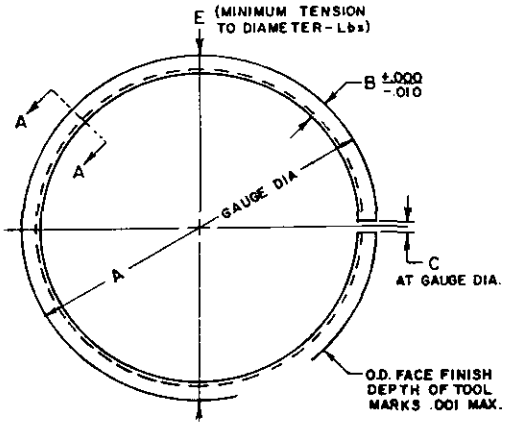

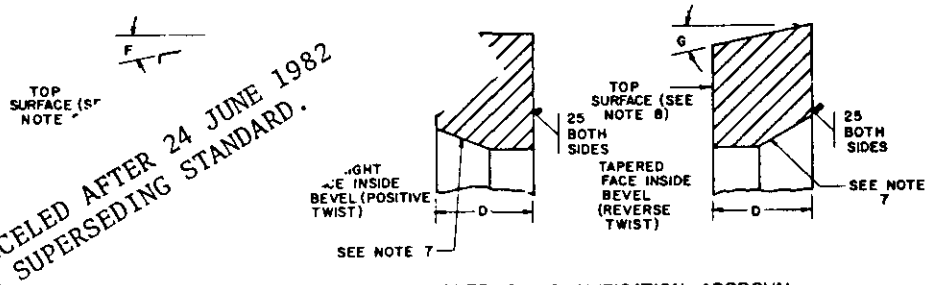

(B) ...NAL DESIGN (S) TO BE DETERMINED BY QUALIFICATION APPROVAL

...GHT TIGHTNESS: MUST BE LIGHT - TIGHT, BLURRY OR FUZZY LIGHT PERMISSIBLE.
MATERIAL: SAE J 929 CAST IRON. (SEE NOTE 10).
3. SURFACE TREATMENT: CAST IRON SURFACES SHALL BE CHEMICALLY TREATED FOR SCUFF AND CORROSION RESISTANCE.
4. ALL DIMENSIONS IN INCHES.
5. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(A) 7. ADJUST BEVEL OR COUNTERBORE TO PROVIDE .0005 to .0018 TWIST PER .100 OF RING WALL THICKNESS 180° FROM GAP.
8. TOP SURFACE IDENTIFICATION: MARK OR CAST TOP SURFACE IDENTIFICATION WITHIN 45° OF GAP.
9. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER - EXAMPLE: MS 39349-1.
10. FOR DASH 1 (-1) RINGS, OPTIONAL MATERIAL IS T.P. M-89, H.S.C.I., HARDNESS-ROCKWELL "B" 98-106.
(A) 11. FOR PROCUREMENT PURPOSES OF RINGS FOR MS PISTONS SEE MS 39351.
12. *RINGS ARE TO BE PROCURED AS SETS ONLY.*
(A) 13. MS 39349 SUPERSEDES MS 13932-1 THRU -24 AND MS 13932-34 THRU -39 RESPECTIVELY.
(A) 14. STATUS AND INTERCHANGEABILITY: PISTON RINGS IDENTIFIED BY MS 13932-1 THROUGH -24 AND -34 THROUGH -39 ARE CANCELLED/INACTIVATED. THE SUPERSEDING DASH NUMBERS IN MS 39349 ARE IDENTICAL TO THE SUPERSEDED DASH NUMBERS IN MS 13932.

APPROVED 2 AUG. 1971 REVISED (A) 22 FEBRUARY 1973 (B) 24 June 1982

REVIEW ACTIVITIES: AV, AT
USER ACTIVITIES: MC, YD

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

P.A. ME Other Cust AIR FORCE - 82	TITLE RING, PISTON: ENGINE, INTERMEDIATE COMPRESSION	MILITARY STANDARD MS 39349
PROCUREMENT SPECIFICATIONS MIL-E-11275	SUPERSEDES: (A) MS 13932 IN PART	SHEET 1 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.