FED. SUP CLASS
4730

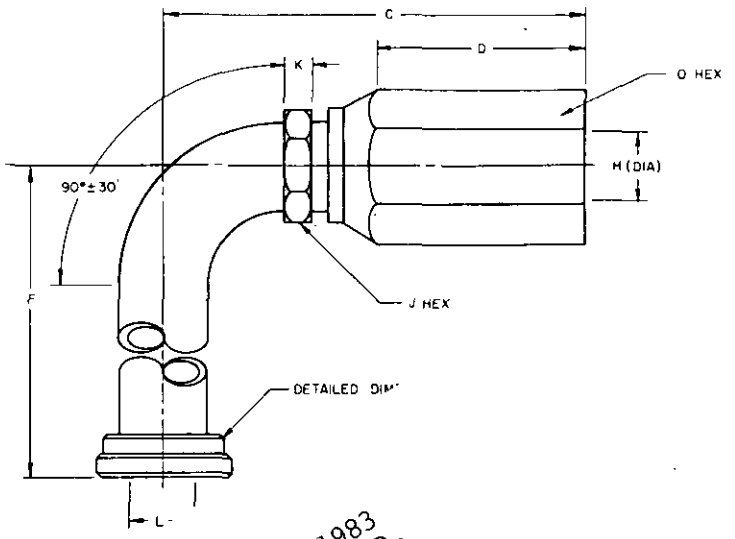


TA[illegible]

| Size (Nominal) | Flange Da[illegible] | J Max. | K Min. | L Min. | O Max. |
|---|---|---|---|---|---|
| 1-1/4 | [illegible] | 1.88 | 0.41 | 1.00 | 2.25 |
| 1-1/4 | 5.30 | 1.88 | 0.41 | 1.00 | 2.25 |
| 1-1/2 | 5.87 | 2.13 | 0.41 | 1.23 | 2.63 |

[illegible] working pressure for elbows.

| [illegible] O.D. Ref | 1-1/4 | 1-1/2 |
|---|---|---|
| Pressure | 3000 | 2500 |

NOTES:
1. Material shall be steel or malleable iron.
2. The elbows shall be zinc coated in accordance with QQ-Z-325, Type II, Class 2, or cadmium plated in accordance with QQ-P-416, Class 3, Type II, except the embrittlement check need not be run.
3. Threads shall be in accordance with NBS Handbook H-28, except threads that grip the hose (if used) are optional.
4. All dimensions are in inches.
5. Marking shall include the manufacturer's name or trade mark, size of the elbow, and the letter "R-X".
6. Pressures are in pounds per square inch.
7. Proof pressure shall be that pressure which is equal to twice the maximum working pressure (working pressure X2).
8. Burst pressure shall be that pressure which is not less than four times the maximum working pressure (working pressure X4).
9. Elbows are for use with four spiral light wire reinforcement hose conforming to MIL-H-52471, Type E.
10. Installation designs shall provide for maximum elbow dimensions specified for size and type.
11. The MS part number consists of the MS sheet number, plus the dash numbers. Example: MS -20 -20. The MS number indicates a 90° bend, long drop elbow with split flange fitting; the -20 indicates 1-1/4 inch nominal termination size (in increments of 1/16 inch); the next -20 indicates hose size 1-1/4 inch.
12. Referenced documents shall be of the issue in effect on date of invitation for bids or request for proposal.
13. For design feature purposes this standard takes precedence over procurement documents referenced herein.

CANCELLED 6 December 1983
NO SUPERSEDING STANDARD.

User activities:
Army - MU, WC
Air Force - 99

Review activities:
Army - GL
DSA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 4 NOVEMBER 1976 REVISED (A) 6 December 1983

| P.A.ME Other Cust | TITLE Elbow, flange to hose, field attachable (reusable), hydraulic, pressure type, screw-on, 4-bolt split flange, 90° bend, long drop, four spiral light wire reinforcement hose | MILITARY STANDARD MS 39356 |
|---|---|---|
| PROCUREMENT SPECIFICATIONS MIL-A-52525 | SUPERSEDES: | Page 1 of 1 |

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 4730-0472

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.