FED. SUP CLASS
2920

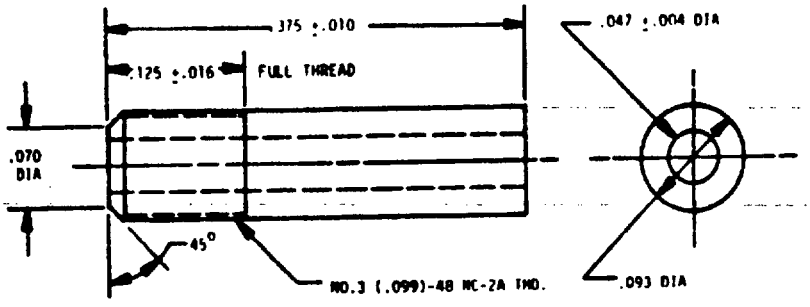

REQUIREMENTS:

(A) 1. MATERIAL: BRASS CONFORMING TO COMPOSITION 11 OR COPPER ALLOY NO. 360, TEMPER HALF-HARD MINIMUM OF QQ-B-626.
2. FINISH: SILVER PLATE CONFORMING TO TYPE II, .0005 MINIMUM THICKNESS, OF QQ-S-365.

NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE: ± .005 FOR DECIMALS, ± 1/64 FOR FRACTIONS, AND ± 2° FOR ANGLES.
(A) 2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
(A) 3. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
** THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

(A) DENOTES CHANGE

APPROVED 14 APR 1958 REVISED (A) 16 FEB 1988

USER ACTIVITIES: ARMY-ME NAVY-ME

REVIEWER ACTIVITIES: DLA-CS

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

P. A. ARMY-AT Other Cost AF-99	INTERNATIONAL INTEREST	TITLE ADAPTER LEAD, TO TERMINAL: SPARK PLUG CABLE (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS51016
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 672-1 (COORDINATED)

2920-0422

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:53Z
Check the source to verify that this is the current version before use.