
MILITARY SPECIFICATION SHEET

STRAPS, CLAMPS, AND MOUNTING HARDWARE, PLASTIC AND METAL FOR CABLE HARNESS TYING AND SUPPORT STRAP, TIE DOWN, ADJUSTABLE, CORROSION RESISTANT STEEL TYPE VI, CLASS 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the strap described herein shall consist of this document and the issue in effect of specification MIL-S-23190.

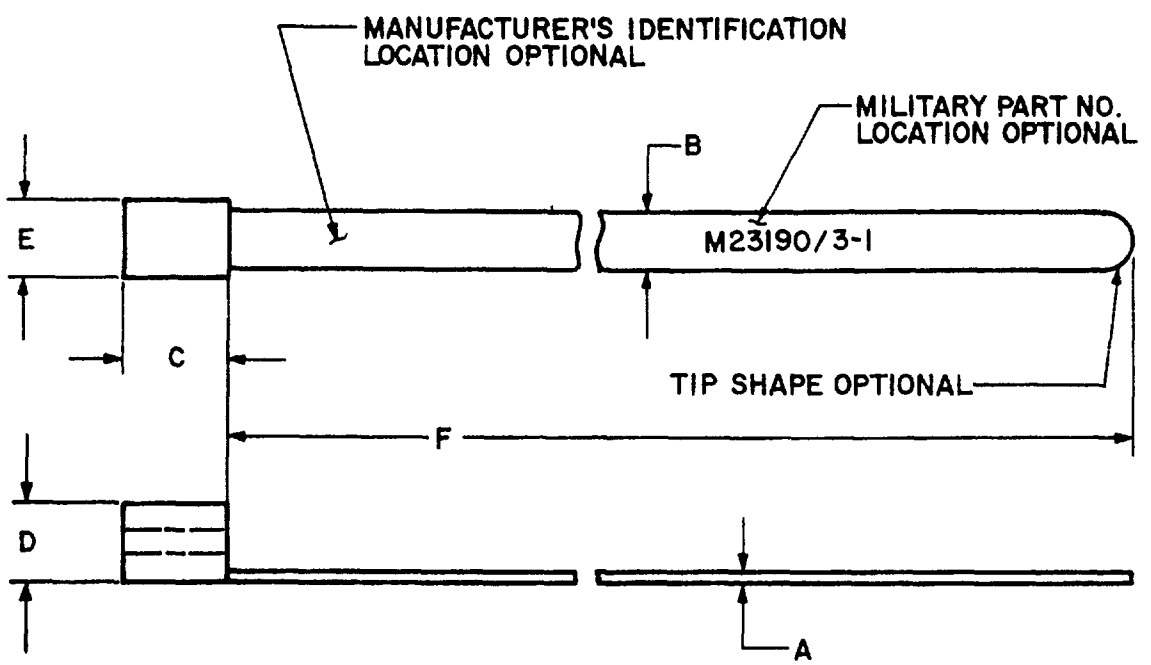

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:51Z
Check the source to verify that this is the current version before use.

TABLE I.

Dash Number	Bundle Dia Inch Min	Bundle Dia Inch Max	A Max	B Max	C Max	D Max	E Max	F Min	Min Tensile Strength Lb	Strap Identification Code (See Note 5)	MS Installation Tool	Tool Tension Setting Range (See Note 4)
1	3/4	2	.015	.20	.46	.18	.25	7.0	100	STD (STANDARD)	MS90387-3	1 TO 4
2		4						13.3				
3		6						19.5				
4		8						25.9				
5	1	2		.33	.57	.23	.41	7.0	250	HVY (HEAVY)		5 TO 8
6		4						13.1				
7		6						19.5				
8		8						25.8				
9		10						32.1				

INCH	mm	INCH	mm	INCH	mm
.015	0.38	.57	14.48	10.00	254.00
.18	4.57	.75	19.05	13.1	332.74
.20	5.08	1.00	25.40	13.3	337.82
.23	5.84	2.00	50.80	19.5	495.30
.25	6.35	4.00	101.40	25.8	655.32
.33	8.38	6.00	152.40	25.9	657.86
.41	10.41	7.00	177.80	32.1	815.34
.46	11.68	8.00	203.20		

REQUIREMENT:

1. Material: Corrosion resistant steel, per Federal Specification QQ-S-766, Class 302/304 or 316.

2. Moisture Conditioning Test: Not required.

3. Temperature Range: -54°C (-65°F) to 300°C (572°F).

NOTES:

1. All dimensions are in inches.

2. Straps shall have no burrs, sharp edges or sharp corners.

3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:51Z
Check the source to verify that this is the current version before use.

4. Tool Tension Settings - The tool tension setting ranges specified in Table I are for typical wire bundle applications. Settings less or greater than the ranges specified may be necessary for special applications.

5. Unit Packaging Marking - The unit package shall have the following typical information marked on the package or contained within the package:

	Example
Military Part Number (Class 1 Only)	M23190/3-1
Strap Identification Code	Standard
MS Installation Tool	MS90387-3
Tool Tension Setting Range	1 to 4

6. Example of part number:

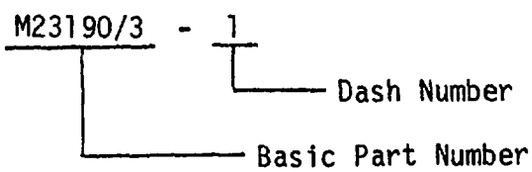

Custodians:
Army - CR
Navy - AS
Air Force - 85

Review Activities:
Army - MI, AR
Navy - EC
Air Force - 80, 99
DSA - GS
DOD - NS

User Activities:
Army - AV, ME
Navy - SH, OS, MC
Air Force -

Preparing Activity:
Navy - AS
Project No. 5975-0601

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T15:51Z
Check the source to verify that this is the current version before use.