AA-C-001770A (GSA-FSS)
March 31, 1978
SUPERSEDING
AA-C-001770 (GSA-FSS)
May 1, 1972

INTERIM FEDERAL SPECIFICATION

CABINETS, WARDROBE AND STORAGE, CONTEMPORARY STYLE, STEEL, GENERAL OFFICE

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. The wardrobes and storage cabinets covered by this specification are of contemporary style and they are designed to be compatible with other standard contemporary style steel office furniture (see 6.1).

1.2 Classification.

1.2.1 Types, classes, sizes and styles. The cabinets shall be of the following types, classes, nominal sizes (see 3.3.6.1), and styles as specified (see 6.2).

Type I - Storage Cabinets

Class 1 - Double Door

Size 1 - 36 inches wide by 18 inches deep by 80-9/16 inches high.
Size 2 - 36 inches wide by 18 inches deep by 64-3/4 inches high.

Class 2 - Single Door

Size 3 - 18 inches wide by 18 inches deep by 80-9/16 inches high.
Size 4 - 18 inches wide by 18 inches deep by 64-3/4 inches high.

Type II - Combination storage and wardrobe cabinets.

Class 1 - Double Door

Size 1 - 36 inches wide by 18 inches deep by 80-9/16 inches high.
Size 2 - 36 inches wide by 18 inches deep by 64-3/4 inches high.

Type III - Wardrobe Cabinet

Class 1 - Double Door

Size 1 - 36 inches wide by 18 inches deep by 80-9/16 inches high.
Size 2 - 36 inches wide by 18 inches deep by 64-3/4 inches high.

Class 2 - Single Door

Size 3 - 18 inches wide by 18 inches deep by 80-9/16 inches high.
Size 4 - 18 inches wide by 18 inches deep by 64-3/4 inches high.

FSC 7105
7125

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

Style (Applicable to Class 2 Only)

A - Left Hand Door
B - Right Hand Door

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-C-320	-	Chromium Plating (Electrodeposited).
QQ-N-290	-	Nickel Plating (Electrodeposited).
QQ-P-416	-	Plating, Cadmium (Electrodeposited).
QQ-R-571	-	Rods, Welding, Copper and Nickel Alloys.
QQ-Z-325	-	Zinc Coating, Electrodeposited, requirements for.
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coating.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-636	-	Box, Fiberboard.

Federal Standards:

Fed. Std. No. 101	-	Preservation, Packaging, Packing Materials; Test Procedures.
Fed. Std. No. 141/GEN	-	Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing.
Fed. Std. No. 141/6101	-	60 DEGREE Specular Gloss.
Fed. Std. No. 187	-	Identification of Pressed Bends, Forms, Seams and Joints (Sheet Metal).
Fed. Std. No. 595	-	Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, MO., Forth Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-L-10547 - Liners, Case, Waterproof.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association Inc., Traiff Department, 1616 P Street, N.W., Washington, D. C. 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to Uniform Classification Committee, Room 1106, 222 Riverside Plaza, Chicago, IL 60606.)

American Iron and Steel Institute:

Steel Products Manual, Carbon Steel Sheets.

(Application for copies should be addressed to American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2, before production is commenced, a set-up sample of each type, class, size and style of finished commodity on contract, and component parts thereof, shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this document. Also, one unassembled cabinet, (as for knocked-down shipment), shall be assembled to determine compliance with the assembly provisions in 3.3.5. Approval of the preproduction samples authorize the commencement of production but does not relieve the contractor of responsibility for compliance with all provisions of this document. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. They shall be unused in their present state and free from defects which affect the serviceability or appearance of the finished product.

3.2.1 Steel. The steel sheets used for all exposed parts shall be of Commercial Quality cold rolled steel with a stretcher level standard of flatness as defined in the Steel Products Manual, Carbon Steel Sheets. Other sheets may be cold rolled and oiled hot rolled, pickled and oiled or hot rolled annealed. The steel shall be smooth, free from rust, scale, pits, scratches, laps and buckles affecting strength or appearance. The gage numbers specified and the decimal equivalents thereof shall be in accordance with the steel products manual.

3.2.1.1 Steel Thickness. The thickness of steel to be used for individual parts shall be as given in table I and the applicable paragraphs of this specification. They are the minimum thicknesses permitted, except the decimal equivalents shown for gages are subject to the tolerances given in the Steel Products manual. When a gage is not specified for an individual part, the steel thickness shall be not less than used for the same component on similar standard commercial items and, if necessary to produce a satisfactory end item, it shall be of greater thickness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Thickness of steel for individual parts

Part	Nominal Decimal Gage (min)	Equivalent (inches)
Tops	20	0.0359
Backs	22	.0299
Sides	22	.0299
Bottoms	20	.0359
Partitiions (vertical)	20	.0359
Doors	20	.0359
Door hat section reinforcement	24	.0239
Side member door frames	As specified in 3.3.8	
Top and bottom tie members of door frames	18	.0478
Base panels	20	.0359
Shelves	20	.0359

3.2.2 Hardware.

3.2.2.1 Face hardware. The face hardware shall be satin finished type 302 corrosion resistant steel or satin finished chromium plating (3.2.3.2.1) on steel, or aluminum, or on die-cast zinc, brass or bronze. The exposed surfaces of all face hardware used on a single unit shall be finished to match each other and the GSA Standard Sample (see 6.4).

3.2.2.1.1 Flush pull assembly. The cabinet doors shall be equipped with a flush pull assembly which shall consist of a hand cavity, a one-piece and a lift lever member. The lift member and the frame shall be of one of the materials specified in 3.2.2.1. The lift lever member and the exposed portion of the frame shall have the finish specified in 3.2.2.1. The flush pull assembly shall be rectangular in shape and the overall dimensions of the exposed portion of the frame, shall be 4-1/2 inches minimum, 6 inches maximum by 1-1/4 inches minimum, 1-3/4 inches maximum. The long dimension shall be vertical. The exposed portion of the frame face shall be not less than 1/4 inch nor more than 3/8 inch wide. The lift lever member shall be contained within the hand cavity and shall project from the top of the cavity not less than 5/8 inch nor more than 1-1/2 inches when the cabinet door is closed and latched. The exposed portion of the frame shall not project more than 3/32 inch beyond the face of the cabinet door. All single door units and the right hand door of double door units shall be equipped with flush pull assemblies as described herein. The flush pull assembly shall incorporate in its design a recessed hand cavity which shall provide a comfortable finger tip compartment for the pull portion of the assembly. The hand cavity shall contain a lift lever member which shall control the three point latching mechanism (see 3.3.10). Activation of the lift member shall not cause movement of the recessed hand cavity or decorative molding nor shall it scratch, mar or cause metal-to-metal contact with these components. The lift lever member activation movement shall be vertical, easy to operate by one's fingers and shall not employ rotational hand action. The recessed hand cavity shall be finished to match the color of the cabinet door and it shall be completely enclosed (boxed) with metal except as required for the vertical movement of the activating lift lever member. The hand cavity and decorative molding shall be securely fastened and attached to the cabinet door by welding or mechanical means so that it cannot be easily removed after assembly.

3.2.2.1.2 Locks. A pin or disk tumbler key lock having not less than 125 key changes shall be provided with each cabinet. The locks shall be master keyed and, when specified, (see 6.2), master keys shall be furnished. The face of the lock shall be as specified in 3.2.2.1. The locking mechanism shall be designed to prevent automatic locking when doors are closed. Duplicate keys shall be furnished with each lock and, unless otherwise specified, (see 6.2), each lock on any order of 125 cabinets or less shall be of a different key change in that one set of duplicate keys will not operate more than one lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.2.2 Coat hooks. Coat hooks shall be commercially available items, formed from ferrous metal or cast from ferrous or nonferrous metal. Cast aluminum alloy hooks shall be annodized. Hooks of other materials shall be plated to resist rust. Ends shall be closed and smooth. Each hook shall be provided with not less than two mounting holes.

3.2.2.3 Glides. The base of the glides shall be of virgin white polyethylene or of satin finished stainless steel. They shall be not less than 1-1/16 inches in diameter and and have a substantially flat bottom. The glides shall be the screw type.

3.2.2.4 Fastening devices. Bolts shall be of steel, not less than 3/16 inch in diameter and shall have slotless heads, (except bolts with slotted heads may be used to attach the non-adjustable hat shelf). They shall be provided with locknuts or with solid nuts and lockwashers. If rivets are used to attach hinges they shall be solid steel or of aluminum alloy. Solid steel rivets shall be no less than size 10 with a nominal diameter of 0.134 inch. When aluminum alloy rivets are used to attach hinges they shall be the blind type with a break stem and have a minimum shear strenght of 2000 p.s.i. Their body diameter shall be not less than 3/16 inch, except that commercial tolerances will be permitted. The rivet shall expand to fill the clearance hole completely. Rivets used to attach one leaf of the hinge to the door frame shall have countersunk heads. Rivets used to attach other parts shall be not less than 5/32 inch (commercial tolerances acceptable) in body diameter and shall have domed heads. The minimum shear strength shall be 900 p.s.i. The method of staking and the size of staked area shall be as recommended by the manufacturer of the rivets used. All steel fastenings shall be made to resist corrosion in accordance with the fastening device manufacturer's commercial practice except organic coatings shall not be used as the sole protective agent.

3.2.3 Finishing materials.

3.2.3.1 Painted finish.

3.2.3.1.1 Primer. The primer, when used, shall be compatible with the finishing enamel specified in 3.2.3.1.2.

3.2.3.1.2 Enamel. The enamel shall be of the baking type in accordance with the manufactuer's commercial product (see 3.4.1.3).

3.2.3.1.3 Color. Unless otherwise specified, the color of the enamel finish shall be one of the following colors from Federal Standard No. 595 (see 6.2 and 6.3).

Black	No. 27040
Parchment	No. 27769

3.2.3.2 Plated finish.

3.2.3.2.1 Chrome, cadium and zinc plating. The material used in the plating process shall be as normally used commercially to accomplish the thickness, finish and quality specified herein (see 3.4.2).

3.2 Identification label. The identification label shall be rectangular, minimum 2-1/2 inches by 1-1/2 inch, with corners rounded and all white in color. The adhesive shall be the permanent type. The label shall be legibly marked in permanent dark ink with the contractor's name or trademark, contract or order number, item stock number and year of manufacture.

3.3 Construction. The construction requirements specified herein are minimum. The contractor will exceed these requirements (without altering the general configuration, basic design concept or primary construction specified) wherever necessary to conform to the test provisions specified in 4.5. When alternate constructions are permitted, the one chosen must be used in its entirety. Combining some of the provisions of one alternate with some of the provision of another alternate is not permitted. Any detail not specified shall be consistent with good quality production of similar commercial products. All elements of construction shall be free of any conditions which hinder the proper function of any part of the units or which constitute a potential hazard to personnel or their clothing.

3.3.1 Appearance. The appearance of the cabinets and the arrangement of interior components shall be generally as shown in the applicable figures. Specific requirements shall be as specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.2 Spot welding. Spot welding shall not be closer to the edge of either adjoining member than one-half of the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds. The greatest depth permitted on depressed spot welds on exterior surfaces shall be not more than 1/64-inch (0.0156). All excessively depressed spot welds and all cratered spot welds shall be filled, ground smooth, and enamel finished so as to blend with the enamel finish of the cabinets. Unless otherwise specified herein, spot welds shall be centered no more than 9 inches apart.

3.3.3 Brazing. When brazing is used in lieu of welding to join component parts, the brazing method shall include the use of a nickel-bronze rod conforming to type I, class RBCuZn-D of QQ-R-571 and shall have a tensile strength of at least 70,000 p.s.i. When brazing is used simply as a filler, the brazing method may include the use of another rod having adequate tensile strength to assure that the brazed area will not crack or fracture under shipping, moving, or in-use conditions.

3.3.4 Fabricating terms. Unless otherwise provided, sheet metal formations specified herein shall conform to the illustrated nomenclature in Fed. Std. No. 187. The bends and folds in the formations specified are the minimum number of bends and folds permitted.

3.3.5 Assembly (general). Cabinets shall be furnished ready for complete and proper assembly (shipped knocked-down) or shall be completely and properly assembled by the contractor (shipped set-up), (see 6.2). When shipped set-up, all cabinets having adjustable shelves shall have the adjustable shelves protected against damage and abrasion and packed on the inside bottom of the cabinet. Unless a specific means is specified herein, set-up assembly shall be accomplished by welding, brazing, riviting, bolts nuts and lockwashers or locknuts, (or a combination thereof). When shipped knocked down, assembly shall be accomplished with bolts, nuts and lockwashers or locknuts. Spring clips may be used in conjunction with bolts, nuts and lockwashers but not instead of them. The necessary types and quantity of fastening devices, along with the assembly instructions specified in 3.5, shall be packed with each cabinet. Complete assembly of knocked-down cabinets shall be accomplished with simple hand tools, (ie. screwdriver, plies, mallet wrench). The need of tools, developed specifically for cabinet assembly shall not be permitted. Also, modification of the cabinet during assembly, (drilling holes; enlarging holes; hand-forming, distortion or cutting of metal to accomplish a proper fit), is not permitted. The cabinets shall be capable of proper assembly without such modifications. Under both the set-up and knocked-down conditions, all welded and mechanical joinings shall be, or make provision to be, secure, rigid and properly aligned. Assembled bolts shall be on not more than 12 inch center vertical joints, or not more than 8 inch center on horizontal joints and shall be as close as possible, (depending on construction used), to ends and corners. Mechanical fastenings shall not show on the front or sides of any cabinet, whether set-up or knocked-down. Also, the doors on single door cabinets and the right hand door on double door cabinets shall have the flush pull assembly latching mechanism and lock completely installed on the doors before shipment, whether they are shipped set-up or the knocked-down, assembled cabinets shall not be twisted, buckled, or out of square.

3.3.6 Dimensions. The overall dimensions (exclusive of face hardware) of the cabinets shall be the applicable sizes listed in 1.2.1.

3.3.6.1 Tolerances. A tolerance of plus 1/16 inch minus 1/8 inch will be permitted in all dimensions listed in 1.2.1. Tolerances permitted in the documents referenced herein are applicable, as are recognized ordering limits to materials procured by standard or nominal sizes and thicknesses.

3.3.7 Cabinet case. The cabinet case shall consist of sides, back, top, bottom and base in accordance with 3.3.7.1. The components shall combine to produce a well designed, satisifactory appearing case. The steel used shall be of the kind and quality specified in 3.2.1 and of the minimum thickness specified in table I.

3.3.7.1 Sides, back, top, bottom and base. The front surface of the top may be flush with or may extend beyond the face of the cabinet not more than 1/8 inch. The outside surfaces of the sides and the back of the cabinet shall be flush with or outside surfaces of the top of the cabinet. The top shall be 1-1/2 inches high (plus or minus 1/4 inch) and shall have at least two formations on each of the four sides and shall have provisions for secure fastening to the cabinet sides and back. The four vertical corners of the top shall be neatly closed. They shall be brazed and ground smooth along any seam on the front face and along any seam where the front and side vertical flanges meet. The front edges of the side panels shall be formed inward in a return flange to form the vertical edges of the cabinet front. The return flange portion of this formation shall be formed in-square along its entire vertical length to such a degree as to achieve a snug fit to the internal front frame. Any seam resulting from the joining of the sides to the back may be at the sides of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

cabinet provided they are within 1/8 inch of the back of the cabinet and no raw or uniformed edges are visible. An interlocking arrangement at the rear corners of the cabinet shall be developed so that it will serve as a secure hinge between the sides and the back. Mating parts, which may incorporate the shelf supports, shall be designed, constructed and assembled so that the sides are hinged to and folded flat onto the back when the cabinet is shipped knocked-down. (Single door cabinets do not need to have the sides pre-assembled to the back when shipped knocked-down.) The cabinet bottom shall be supported by the base panel and not less than 18 gage (0.0478 inch) reinforcements extending across and welded to the cabinet sides and back. The top of the reinforcing members shall be formed to support the cabinet bottom and the bottom of the reinforcing members shall have not less than a channel formation. When the cabinet sides and back have no formations along the bottom edges, these edges shall be positioned between 1/32 inch and 1/16 inch above the bottom of the reinforcing members. The cabinet front base panel shall be 3 inches high, (plus or minus 1/8 inch), and shall extend between and shall attach to the internal frame. It shall be flush with the face of the cabinet. The bottom tie member of the internal frame may be formed to serve as the base panel, or the base panel shall be a separate component. The bottom edge of the base panel shall have a channel formation. (Note: platform bases are not acceptable.) The cabinets shall be equipped with four glides (see 3.2.2.3). These glides shall be supported by not less than 14 gage (0.0747 with thick) steel gussets, or weld nuts of same base thickness or by some other method equally strong support. When fully retracted, the glides shall project between 3/32 inch and 3/16 inch below the lowest point of the assembled cabinet. They shall also provide at least 1/2 inch of stable, extended adjustment.

3.3.8 Internal front frame. The internal frame shall consist of two side members, a top tie member and a bottom tie member, (which may serve as the cabinet base). The side members shall be 7/8 inch by 7/8 inch by 0.125 inch (minimum) steel angles or 1 inch by 1 inch by 0.100 inch (minimum) steel angles or not less than 16 gage (0.0598 inch) steel which shall be formed to accomplish strength and rigidity. When the 16 gage sheet steel is used for a side member, its width, before forming shall be at least 4-3/16 inches. The top and bottom tie members shall be appropriately formed from steel of not less than the minimum thickness specified for these members in table I. The internal frame components shall join to form a rigid one piece unit to which the doors shall be attached (the doors shall not be attached to the frames when the end item is shipped knocked-down). The base member of the internal frame may also serve as the external base of the cabinet as specified in 3.3.7.1. The top tie member and the bottom tie member may have formations which serve as the door stop.

3.3.9 Doors. All door edges shall be flanged 90 degrees inward not less than 5/8 inch. There shall be additional 90 degree bends on all vertical edges. An appropriate formation shall prevent the left hand door of double door cabinets from opening until the right hand door is opened. When doors are closed their faces shall be flush with or shall recess the front face of the cabinet not more than 1/16 inch. The left hand door and the right hand door of double door cabinets shall fit together neatly. There shall be no gaps between doors or between doors and cabinet that allow a 3/32 inch feeler gage to be inserted. There shall be three or more hinges for each door of the sizes 1 and 3 cabinets and 2 or more hinges for each door of the sizes 2 and 4 cabinets. They shall permit doors to open at least 160 degrees. When door is closed the hinges shall not be visible. The door on single door cabinets and the right hand door on double door cabinets shall be equipped with a flush pull assembly (which shall be completely assembled) as specified in 3.2.2.1.1; latching mechanism specified in 3.3.10 and with locks as specified in 3.2.2.1.2. Fastenings used to attach locks and flush pull assembly shall not be visible when doors are closed. Each door shall be reinforced with a hat section formed from at least 24 gage (0.0239 inch) steel. It shall be not less than 5-1/2 inches wide, overall, with a minimum 1/2 inch deep channel and shall be spotwelded to the back of the door. The welds shall be not more than 8 inches apart. The top and bottom welds shall be within 1 inch of the ends of the section. This reinforcement shall be centrally located laterally, as determined visually, and shall extend to within 1/2 inch of the top and bottom flanges. The door shall not bind or otherwise fail when tested in accordance with 4.5.1.1.

3.3.10 Latching mechanism. The latching mechanism shall be controlled by the activating lift level member (see 3.2.2.1.1) in the recessed portion of the flush pull assembly hand cavity and shall be capable of being manually activated with minimum of effort. The vertical movement of the lift lever member shall unlatch the latching mechanism, allowing the door to be pulled open. The latching mechanism shall be retained in the unlatched position until the door is closed. Closing the door shall automatically release the latching mechanism and latch the door of the cabinet. The latching mechanism shall operate smoothly. The mechanism shall engage the cabinet at the top and bottom of all cabinets, at the approximate center of the latch side of single door cabinets, and at the approximate center of the left hand door on double door cabinets. The latching bar shall be not less than 1/4 inch diameter steel rod, or other shaped bar or channel, provided it has an equal or greater cross sectional area, and is at least 1/8 inch thick at points of engagement. The engagement at the top

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

and at the bottom shall be 1/2 inch, minimum. All cabinets shall have a steel or nylon latching bar guide secured tightly and permanently, abutting or extending through the flange at the top of the door and a similar guide secured in like manner at the bottom of the door. Manipulation and pressure exerted by hand shall not dislodge them from the door or cause them to break or to become loose. They shall extend at least 1/2 inch from the inside of the flanges. If of nylon, the portion which surrounds the latching bar shall have walls at least 1/16 inch thick. If the guides extend through the flanges of the door and utilize an intergral interlocking feature, the feature shall include a flange or similar formation which surrounds the entire perimeter of the aperature through which the guide is inserted. When disengaged, the latching mechanism shall not restrict the easy opening and closing of the door. The latching mechanism shall be cadmium or zinc plated, (see 3.2.3.2.1).

3.3.11 Shelf supports. All cabinets shall have supports for shelves which permit shelf adjustment on two inch centers or less without the use of tools or separate clips. They shall provide positive balanced support for the shelves at four or more locations. Supports shall hold the shelves in place firmly. Shelf supports formed by lancing the sides and back of the cabinet are not permitted. The shelf supports shall provide shelf adjustment to within 10 inches of the nearest obstruction at the top and at the bottom of the cabinet.

3.3.12 Interior equipment.

3.3.12.1 Type I. All type I cabinets shall be eqipped with six adjustable shelves in accordance with 3.3.12.1.1. The shelf supports shall be as specified in 3.3.11.

3.3.12.1.1 Adjustable shelves. Side and rear edges of shelves shall have at least one 90 degree flange and additional formations when necessary for proper engagement to the shelf support. The front edge shall have a formation of at least three bends which will provide a vertical face not less than 1/2 inches high. The shelves shall be as wide and deep as possible within the limitations of the cabinet construction used and the fact that the shelves shall be packed and placed on the inside (bottom) of the cabinet for set-up shipment. All shelves shall be easily adjusted.

3.3.12.2 Type II. All type II cabinets shall be equipped with six adjustable shelves, one vertical dividing partition, one coat rod and two coat hooks. The type II, size 1 cabinet shall be equipped with a nonadjustable hat shelf. The shelves, including the hat shelf, shall be formed as specified in 3.3.12.1.1. The adjustable shelves for the storage compartment shall extend between the side and the vertical partition of the cabinet and shall be supported as specified in 3.3.11. The fixed hat shelf shall extend between the sides of the cabinet. The minimum depth of the adjustable shelves shall be 15-1/2 inches and the minimum depth of the hat shelf shall be 16 inches. The hat shelf of the size 1 cabinet shall clear the nearest obstruction above it by not more than 12 or less than 8 inches. The hooks shall be as specified in 3.2.2.2. They shall be on the right side of the wardrobe compartment. The verticial partition shall be as specified in 3.3.12.2.1 and the coat rod shall be as specified in 3.3.12.2.2.

3.3.12.2.1 Vertical dividing partition. The front face of the vertical dividing partition shall be flush with, or shall inset by not more than 3/4 inch the front face of the nonadjustable hat shelf of the size 1 cabinet and from there shall extend the full depth of the interior of the cabinet. Its front face shall be even with or shall extend beyond the adjustable shelves. It shall also extend between the bottom and the hat shelf, or between the bottom and the top, depending on the size of the cabinet, dividing the cabinet into two equal compartments as determined visually. Its back vertical edge shall have a flange plus a flat fold. Its front vertical edge shall have the same formation or shall be channel formed and flanged. Both edges shall be at least 1/2 inch wide. The top and bottom shall have flanges of not less than 7/16 inch. The partition shall be secured in place at not less than three locations if fastenings are at the top, bottom, and back of the partition; or at not less than four locations if the fastenings are at the top and bottom of the partition. When spotwelding is used for attachment, the welds shall be not more than 8 inches apart.

3.3.12.2.2 Coat rod for type II cabinets. The coat rod shall be a plated steel rod or plated steel tube not less than 3/4 inch in diameter and in wall thickness 1/16 inch minimum (when tubing is used) than used on standard commercial storage and wardrobe cabinets that are similar to the type II, class 1, sizes 1 and 2 cabinets herein. The rod shall support rigidly capacity loads of evenly distributed heavy clothing. It shall be located in the wardrobe compartment and shall clear the underside of the hat shelf or the underside of the top, depending on the size of the cabinet, by between 1-1/8 and 2 inches. It shall be attached to the hat shelf or to the top. The rod shall be (1) straight and attached with suitable brackets or (2) it shall have channel formed, flattened ends and be attached by means of two bolts or two rivets at each end. The rod shall span the wardrobe compartment from side-to-side to the extent that it will permit clothing to be hung across the entire width of the compartment interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.12.3 Type III. All type III cabinets shall be equipped with a coat rod. Sizes 1 and 3 shall be equipped with a nonadjustable hat shelf meeting all of the requirements specified in 3.3.12.2 for the nonadjustable hat shelf. The coat rod shall be as specified in 3.3.12.3.1.

3.3.12.3.1 Coat rod for type III cabinets. The coat rod shall be a plated steel rod or plated steel tube not less in diameter and in wall thickness (when tubing is used) than used on standard commercial wardrobes that are similar to the type III wardrobe cabinets herein. The rod shall support rigidly capacity loads of evenly distributed heavy clothing. The rod used in the class 1 cabinets shall be stronger than used in the class 2 cabinets if necessary to provide adequate support for heavy clothing. The rod shall clear the underside of the hat shelf or the underside of the top, depending on the size of the cabinet, by between 1-1/8 and 2 inches. It shall be attached to the hat shelf or to the top. The rod shall be (1) straight and attached with suitable brackets or (2) it shall have channel formed, flattened ends and be attached by means of two bolts or two rivets at each end. The rod shall span the cabinet from side to side to the extent that it will permit clothing to be hung across the entire width of the cabinet interior.

3.4 Pretreatment and finishing.

3.4.1 Painted finish.

3.4.1.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces shall be treated for painting in accordance with any method of Federal Specification TT-C-490.

3.4.1.2 Priming. Unless type I or type II of TT-C-490 is used, all exterior and interior surfaces treated as specified in 3.4.1.1 shall be coated with primer specified in 3.2.3.1.1.

3.4.1.3 Enameling. All primed surfaces shall be coated with enamel as specified in 3.2.3.1.2 and baked in accordance with the enamel supplier's directions. Total dry film thickness shall be not less than 1.4 mils on the outside surfaces of the cabinet, cabinet inside bottom and top of all shelves. The total dry film thickness of enamel and primer on other surfaces shall be not less than 0.6 mil. If pretreatment coating is in accordance with type I or type II of TT-C-490, primer may be omitted and the minimum dry film thickness may be 1.0 mil instead of 1.4 mils in the areas specified herein. The minimum 0.6 mil thickness for other surfaces shall remain applicable. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film, and separation of color. The specular gloss of the finish on exterior surfaces shall be within the range of 35 $\pm$ 5 units when measured in accordance with method 6101 of Fed. Test Method Std. No. 141.

3.4.2 Plated finish.

3.4.2.1 Pretreatment. The components to be plated shall be cleaned and otherwise pretreated in accordance with the standard commercial practice for the type of plating specified.

3.4.2.2 Chromium plating. Chromium plating shall conform to class 1, type II of QQ-C-320. The underplating shall conform to class 1, grade F of QQ-N-290. The exposed surfaces of the chromium shall visually match the GSA Standard Sample (see 6.4).

3.4.2.3 Cadmium plating. Cadmium plating shall be in accordance with class 1, type I of QQ-P-416.

3.4.2.4 Zinc plating. Zinc plating shall be in accordance with type I, class 2 of QQ-Z-325.

3.5 Assembly instructions and parts list. One set of assembly instructions, a list of all parts, and the necessary fastening devices shall be put in a package and shipped with each knocked-down unit. Assembly instructions shall include both text and illustrations. The list of parts shall include the quantity required of each individual item.

3.6 Identification marking. Each cabinet shall have an identification label (see 3.2.4) securely affixed on the inside side of the cabinet, approximately midpoint between the top and bottom of the cabinet.

3.7 Workmanship. A high degree of craftsmanship shll be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges; to assure that the occurrence of defects will not exceed the acceptable quality level specified herein; and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified, (see 6.2), the supplier may utlize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Lot acceptance tests. Lot acceptance tests shall be conducted under the supervision of the Government inspector at the manufacturer's plant. In the event the manufacturer does not have the facilities to perform the required tests, he shall engage the services of a commercial testing laboratory acceptable to the Government. Copies of the laboratory report shall be submitted to the Government inspector upon receipt from the laboratory. All examination and testing shall be in accordance with section 4 of this specification.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.4 Inspection (end item).

4.4.1 Visual examination. Examination of the assembled units shall be in accordance with the classification of defects specified in table II and acceptable quality levels (AQL's) specified in 4.3. The lot size shall be expressed in the number of completed units for the purpose of determing the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one complete of each type and size on contract.

NOTE: ONLY ONE OF DEFECTS IN BRACKETS SHALL BE SCORED FOR EACH UNIT OF PRODUCT EXAMINED.

TABLE II. Classification of end item defects

Examine	Defect	Classification	
		Major	Minor
Enamel finish	Poor adhesion, i.e. blistered, checked, peeling; tacky (not dry to touch) color spearation, stain, foreign matter in coating, area of thin coating or abrasion		X
	Wrong color.	X	
	Scratch through to base metal, bare spots, rust under coating.	X	
Metallic coating	Wrong kind.	X	
	Poor adhesion, i.e. blistered, peeling, flaky, stained or discolored.		X
Workmanship and construction (general)	Any part missing except bolts, nuts, lockwashers and rivets.	X	
	Malformed or mislocated parts affecting serviceability. Broken, punctured or cracked parts.	X	
	Sharp edge or projection that may cause injury.	X	
	Malformed, mislocated, broken or warped parts affecting appearance. Any dent on exposed surface affecting appearance.		X
Sheet metal formations	No formation when one is specified.		X
	Not minimum number of bends or folds specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of end item defects (continued)

Examine	Defect	Classification Major	Classification Minor
Fastening devices	Not treated to resist corrosion; thread stripped on more than one bolt; nut, lockwasher, clip or rivet missing.	X	
	Organic coating sole protective agent; thread stripped on more than one bolt; one bolt, nut, lockwasher, clip or rivet missing.		X
	Fastenings show on front or sides of cabinet.		X
Shelf supports	Do not provide for adjustment of shelves on two inch centers or less.		X
	Tools needed for acceptance or for removal of shelves.		X
	Do not provide for support of shelves at four or more places.	X	
	Formed by lancing side or back of cabinet.		X
	Do not provide for amount of shelf adjustment specified.		X
Sides, back, top, bottom and base	Sides and back not provided with a means to support bottom	X	
	Top overlaps cabinet sides (unless sides or offset)		X
	Front corners of top not closed, brazed, or fusion welded and ground smooth.		X
	Base does not attach to other components or is platform type (either attached or not attached).	X	
	Front of base piece not even with front surfaces of adjacent components.		X
	Front base piece not channel shaped where contacting the floor.		X
Flush pull assembly	Not flush type. X		
	Exposed frame not attached securely (moves independently when horizontal or vertical pressure is applied).		X
	Not designed to actuate a three point latching device. (Not applicable to left hand door of double door cabinets.)	X	
	Fastenings are visible when door is closed.		X
	Pull portion does not provide comfortable natural grip.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of end item defects (continued)

Examine	Defect	Classification Major	Minor
Locks	Wrong type.	X	
	One key will open more than one cabinet in groups of 125 cabinets or less.		X
	Fastenings are visible when door is closed.		X
	Do not prevent automatic locking when door is closed.	X	
Hinge	Visible when door is closed.		X
Doors	Clearance between each door and/or between doors and door opening greater than permitted.		X
	Face of closed door protrudes beyond face of sides, top or bottom of cabinet.		X
	Left hand door can be opened before right hand door.	X	
	Hat section does not extend as specified.		X
Coat rod and coat hook	Wrong location; wrong material; not securely attached; not attached as specified; coat rod does not extend as specified.		X
	Coat rod and coat hooks (unless of aluminum) not metal plated.	X	
Welding and brazing	Missing, not required number or not sound (broken, cracked, burnt through, poor adhesion, inc.).	X	
	Exposed welds or brazes lack finished appearance or not neatly accomplished.		X
Indentification marking	Missing, or is illegible, incomplete or incorrect.		X

4.4.2 Examination of assembly. Cabinets unassembled for knocked-down shipment shall be slected from each inspection lot, assembled, and during and after assembly shall be examined for the defects listed in table III. The inspection level and the acceptable quality level shall be as specified in 4.4.

TABLE III. Visual defects of assembly

Assembly	Requires special tools for assembly; not easily assembled, i.e. requires modification (see 3.3.5), or excess force. Assembled cabinets twisted, buckled or out-of-square.
Assembly instructions and parts list	Missing, illegible or incorrect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.4.3 Dimensional examination. Inspection will be made of cabinets for compliance with all dimensions specified, including thickness of metal and total film thickness of enamel and primer or film thickness of enamel, depending on the type of pretreatment coating used. Any dimension not within the tolerance specified shall constitute a defect. The inspection level and the acceptable quality level shall be as specified in 4.4.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking requirements are complied with. The sample unit shall be one shipping container completely prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level and the acceptable quality level (for packaging and packing and for marking) shall be as specified in 4.4.

4.3.3.1 Examination for packaging and packing. After the tests relating to 4.5.2 have been performed a visual examination shall be made of the shipping container and its contents. Any of the causes for rejection specified in 4.5.2.3 shall constitute a defect.

4.3.3.2 Examination of marking for shipment. An examination shall be made of the marking of the packages. A defect shall be any of the following: (1) wrong method of application (2) incorrect marking (3) illegible marking (4) marking of improper size (5) marking in incorrect location (6) marking not in proper sequence.

4.4 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in percent defective shall be as follows:

For examination in	Inspection levels	AQL's Major	AQL's Total
Table II	II	4.0	10.0
Table III	II		4.0
4.3.2.3	S-2		4.0
4.3.3	S-2		4.0

4.5 Test.

4.5.1 Tests relating to end item.

4.5.1.1 Door hinge test. This test shall be conducted on completely assembled cabinets using inspection level S-2 for the number of cabinets to be tested from any inspection lot. With the cabinet in a upright position a 200 pound test load shall be suspended from the door (each door of double door cabinets, but not necessarily at same time) by a rope located not more than three inches back from the latch side of the top edge of the door. To preclude tilting or upsetting during the test, counterweights may be placed within the cabinet. In a normal manner the door shall be pivoted back and forth, at least 110 degrees in each direction. Each door shall be pivoted each way not less than six times.The weight shall then be removed from the door. If the doors bind when closed or fail in any other respect they shall be considered as having failed the test. Failure to pass the test shall be cause for rejection.

4.5.1.2 Bend test for steel sheets. The steel sheets for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain and over a radius not exceeding the thickness of the test sample without showing any cracks or fractures on the outside of the bend.

4.5.1.3 Finishing tests. A 20 gage steel panel shall be prepared in accordance with 3.4 and related subparagraphs and subjected to the tests described in 4.5.1.3.1, 4.5.1.3.2 and 4.5.1.3.3.

5.5.1.3.1 Flexibility test. The dried film shall show no evidence of cracking or flaking under seven power magnification after a panel has been bent through 180 degrees over a 1/8 inch diameter rod.

4.5.1.3.2 Hardness test. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across the film surface, without evidence of marring when viewed at an oblique angle in a strong light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.5.1.3.3 Adhesion test. The dried film shall not be removed from the panel when the latter has been scored with a razor blade through the film to the base metal in a manner to produce a grid of 1/8 inch squares, and a one inch wide piece of Scotch Brand No. 600, or equal, cellophane tape is applied firmly to the grid surface and then quickly pulled from the surface.

4.5.1.4 Spot weld test. A spot weld assembly of at least two parts of the end item cabinet shall be produced under production or simulated production conditions. A chisel shall be driven between the welds or one part shall be bent back until failure occurs. Failure around the periphery of the weld(s) shall be considered compliance with specification requirements. Failure of the weld(s) shall be failing to comply with specification requirements.

4.5.1.5 Shelf load test. This test shall be performed on shelves in Type I, class 1 cabinets only. The required number of shelves for the cabinet being tested from the top and bottom of the cabinets. The test shall be performed consecutively on each shelf. The test area shall be the entire top of the shelf minus three inches from each side. A weight of 60 pounds shall be equally distributed on the area specified. The weight shall remain on the shelf at least 15 minutes. With the weight on the shelf, a measurement shall be taken from the bottom center of the shelf downward to a point of reference established before the weight was applied. The shelf shall not have more than 0.0625 inch deflection. The same measurement shall be taken after the weight is removed. There shall be no permanent deflection. The cabinet shall then be visually examined. Any damage to the shelf supports, deformation of any component, cracked or broken welds, or loosening of any fastening device shall be cause for rejection.

4.5.1.6 Label adhesive test. The identification labels shall be affixed on the cabinet as specified in 3.6 and shall be allowed to set for a minimum of 4 hours. If the labels can be removed by hand without defacement they shall be considered as failing to comply with specification requirements.

4.5.1.7 Cabinet moving test. This test shall be performed on one cabinet of each type, class, size and style on contract. The load area for all shelves shall be the entire top of the shelf minus three inches from each side. All shelves shall be spaced as equidistant as possible between each other and between top and bottom of cabinet, and between top and bottom of cabinet, and between top fixed shelf and bottom of cabinet, as applicable. The shelves in the Type I, class 1, size 1 and size 2; Type III, class 1, size 1 cabinets shall have 30 pound weights applied. The shelves in the Type I, class 2, size 3 and size 4 cabinets; and Type II, class 1, size 1 and size 2 cabinets; and Type III, class 2, size 3 cabinets shall have 15 pound weights applied. The bottoms of the Type I, class 1, size 1 and size 2; Type II, class 1, size 1 and size 2; Type III, class 1, size 1 and size 2 cabinets shall have a total of 30 pounds applied thereon. The bottoms of Type I, class 2, size 3 and size 4; Type III, class 2, size 3 and size 4 cabinets shall have 20 pound weights applied. The coat rods of the Type II, class 1, size 1 and size 2; and Type III, class 2, size 3 and size 4 cabinets shall have weights of 15 pounds suspended from the entire length of the rods, minus 2 inches from each end. The coat rods of the Type III, class 1, size 1 and size 2 shall have weights of 25 pounds suspended from the entire length of the coat rod, minus 2 inches from each end. The glides shall touch the floor. The cabinet shall be pushed, pulled or "walked" (if necessary, due to the cabinet not sliding easily on the glides), at not faster than normal walking speed for a distance of not less than 25 linear feet, across a surface representing an average office floor. All weights shall then be removed from the cabinets. The cabinets shall be visually examined and shelves and coat rods shall be measured as necessary to determine that no part of the cabinet, shelves, coat rod, shelf supports suffered any permanent deformation. Also, there shall be no cracked or broken welds and there shall be no looseness of mechanical attachments.

4.5.2 Sampling, inspection and test procedures (Applicable to all containers for knocked down cabinets packaging and packing).

4.5.2.1 Test report. The tests specified herein are intended to determine compliance with the requirement for level A, B, or C packing and shall be required on one model identical to the item being packed for each level of packing specified in the contract or order. A test report, indicating no damage to the test item and no functional damage to the container and packing, will be accepted as proof of compliance for the level of packing specified in the content or order when made available to the inspection service. The test results shall be obtained from tests conducted on a item of the identical model specified in the contract or order. Test reports, obtained as a result of tests conducted within 12 months prior to the date of contract or order, shall contain a complete description of the packaging, packing, materials, and items packed, including drawings and pictures as needed. A packed item, tested after date of contract or order, shall be made available for identification by the Government representative and remain at the contractor's plant until the last shipment on the contract is made. This unit shall be used as a guide in determining that packed items furnished on the contract conform to the sample unit tested in accepted. At the option of the Government shall be witnessed by, or conducted under the supervision of a Government inspector.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.5.2.2 Examination after testing. After the specified tests (see 4.6), for levels A or B have been accomplished, a visual examination shall be made of the shipping container and its contents. Any damage to the components or functional damage to the container or packing shall be cause for rejection. Structural damage to the container, which could result in spilling or exposed to the contents or failure of the contractor in subsequent handling, is cause for rejection. Substantial shifting of the contents within the container that create conditions likely to cause damage during shipment, storage and reshipment, will also be cause for rejection. Minor container damage will not be cause for rejections. When the visual examination has been completed, the tested KD units shall be assembled. Any bent, twisted, or misaligned components that prevent proper assembly of the cabinet or operation of its doors and door handles shall be cause for rejection.

4.6 Tests.

4.6.1 The following tests describe the procedures and equipment for preshipment testing of packed units. A test cycle in the order specified herein shall consist of all the tests required for a packed item.

4.6.2 Conditioning. Packed units conforming to the requirements for level A packing shall be conditioned at 100° ± 3° F. and 90 percent ± 3 percent relative humidity for 48 hours prior to testing. They shall then be tested within six hours after being removed from the high temperature and humidity environment. No pre-test conditioning is required for level B packing.

4.6.3 Vibration test. Packed units shall be subjected to the Vibration (Repetitive Shock) Test, Methods 5019 of Fed. Test Method Std. No. 101. The shipping container shall lay on its largest face, as it would normally be stacked on the vibrating platform. The length of time the container is subjected to vibration shall be 1 hour when level B packing is required, or two hours when level A packing is required.

4.6.4 Superimposed - Load Test. Packed units shall be subjected to a compresive load as specifi ed below using Method 5016 of Fed. Test Method Std. No. 101. The load shall be applied for 1 hour, in a direction perpendicular to the largest container face, as it would be under normal stacking conditions. No vertical deflection measurements are required. This test applies to level A and B packing. The compression load is determined by the following formula:

$$\text{Compression Load (Pounds)} = A \times \frac{(B-C)}{C} \times D$$

A - Weight of loaded container (pounds)
B - Allowed stacking height - 15 foot minimum (feet)
C - Height of container (feet)
D - Safety factor - For level A pack, D = 5.00
For level B pack, D = 3.00

4.6.5 Drop test. Packed units shall be subjected to the Cornerwise Drop (Rotational) Test, Method 5005 of Fed. Test Method Std. No. 101. The drop height shall be 27 inches when level B packing is required and 36 inches when level A packing is required. The container shall be dropped once on each of two diagonally opposed corners or the largest container face. Then the container shall be turned over and dropped once on each of the remaining two diagonally opposed corners of the face opposite the first one used.

4.7 Examination of preparation for delivery. (Applicable to all containers for set up cabinets). An examination shall be made to determine compliance with the requirements of Section 5. The sample unit shall be once shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of pre-cent defective.

5. PREPARATION FOR DELIVERY.

5.1 Preservation. All unpainted or unplated surfaces shall be protected with a thin film of commercial grade preservative oil or grease. The latching mechanism shall be protected by application of a commercial grade lubricant containing a rust inhibitor. The lock mechanism (when applicable) shall be protected with dry graphite. The assembly instructions shall be placed in a heat sealer polyethylene bag. The keys shall be placed in a heat sealed polyethylene bag, a kraft envelope or a cotton draw string bag.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T11:41Z
Check the source to verify that this is the current version before use.

5.2 Packaging. Packaging shall be level A, B or commercial, knocked-down (see 5.2.1) or set up (see 5.2.2) as specified (see 6.2).

5.2.1 Knocked down.

5.2.1.1 Levels A and B. Each knocked down cabinet shall be packaged as follows: The door assembly shall have the doors secured in the closed position utilizing pressure sensitive tape. All loose hardware, except rod, when applicable, shall be packaged in a heat sealed bag or bags. The bags shall be constructed from ployethylene film a minimum of 3 mils thick.

5.2.1.2 Commercial. Each cabinet shall be knocked down to produce the practicable minimum cube and preserved and packaged in accordance with normal commercial practice. The complete packaged shall be designed to protect the cabinet against damage during shipment, handling and storage.

5.2.2 Set up.

5.2.2.1 Levels A and B. Each set up cabinet shall be wiped clean prior to packaging and have the base glides set at their lowest position. The adjustable shelves shall be secured in place with pressure sensitive tape, fiberboard forms, metal or plastic packing clips or any other suitable means that is recognized as good industry practice. Alternatively, the adjustable shelves shall be nested in pairs overwrapped in waxed kraft paper, polyethylene film or plastic cushioning material. The shelves shall then be placed in a single fiberboard box or folder and secured in the bottom of the cabinet (inside). Cellulose wadding strips or nonabrasive cushioning pads not less than 0.125 inch thick shall be used on the top and bottom side edges of the doors to prevent metal-to-metal contact when closed. When locks are provided, the doors shall be closed, the unit locked and the keys, packaged as specified in 5.1, secured in the recessed door handle.

A full length bag made of ployethylene film, not less than 1.25 mils thick, shall be used to cover each cabinet. Alternatively, the bag may be omitted when the inside face of the corner pads and spring pads as specified in 5.3.2.2 and 5.3.2.2.2, are coated with a nonabrasive and nontransferable coating such as Resist-O-Coat, Michalman or equal.

5.2.2.2 Commercial. Each set up cabinet shall be preserved and packaged in accordance with normal commercial practice. The complete package shall be designed to protect the cabinet against damage during shipment, handling and storage. 5.3 Packing. Packing shall be level A, B or commercial, knocked down (see 5.3.1) or set up (see 5.3.2) as specified (see 6.2).

5.3.1 Knocked down.

5.3.1.1 Level A. The knocked down cabinets, packaged as specified in 5.2.1.1, shall be individually packed in close-fitting boxes conforming to PPP-B-636, class weather resistant, style optional. Each box shall be closed, sealed and strapped or reinforced in accordance with the appendix to the box specification. Alternatively, triple wall fibe-board, cleated plywood, wire bound or nailed wood boxes shall be acceptable shipping containers when lined with a waterproof barrier material. The edges of the barrier material shall be sealed with waterproof tape or adhesive. The packed boxes, closed, sealed and strapped or reinforced shall be individually tested in accordance with the level A requirements of 4.6.

5.3.1.2 Level B. Each knocked down cabinet, packaged as specified in 5.2.1.1, shall be individually packed with the necessary cushioning, blocking and bracing, in a close-fitting box. Each box shall be closed, sealed, strapped, and/or reinforced as necessary, to comply with the level B tests and requirements of 4.6. The packed wardrobes shall be acceptable by common carrier under National Motor Freight Classification and Uniform Freight Classification.

5.3.1.3 Commercial. Each knocked down cabinet packaged as specified in 5.2.1.3 shall be packed in a fiberboard box to insure delivery at destination, to provide for redistribution by the initial receiving activity, and shall be acceptable by common carrier under National Motor Freight Classification and Uniform Freight Classification.

5.3.2 Set up.

5.3.2.1 Level A. Each set up cabinet, packed as specified in 5.3.2.2, shall be further packed in its normal upright position in quantities as specified (see 6.2) in a close-fitting box, conforming to PPP-B-601, overseas type, style C or I. The contents of each box shall be waterproofed by means of case liners constructed and sealed in accordance with MIL-L-10547. The box shall be closed and strapped in accordance with the appendix to the box specification. Strapping of the individual boxes within this shipping container will not be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.3.2.2 Level B. Each set up cabinet, packaged as specified in 5.2.1.1, shall be packed in a close-fitting box conforming to PPP-B-636, style RSC or IC, type CF, class domestic, variety SW, grade 275 minimum, except that the size and weight limitations are waived. The internal packing shall include the components specified in 5.3.2.2.1 and 5.3.2.2.2. The box shall be closed and reinforced in accordance with the appendix to PPP-B-636.

5.3.2.2.1 Spring pad. A spring pad extending the full inside length and width of the box (+0, -1/8) shall be positioned on top and bottom of each cabinet (see figure 15). The spring pads shall be made from fiberboard conforming to type CF, class domestic, grade 275, variety DW as a minimum. The fiberboard forming the spring pad shall have the corrugations parallel to the width of the box, be slit-scored and folded to provide a minimum clearance of 1-1/2 inches between the cabinet and the inside box flaps. The slit-scored folds shall be not less than 3 inches wide and shall parallel the length of the box.

5.3.2.2.2 Corner pads. "L" shaped corner pads extending the full height of the cabinet (+0, -1/8) shall be used in all four corners of the pack (see figure 15). The corner pads shall be made from fiberboard conforming to type CF, class domestic, grade 200, variety SW, as a minimum. The fiberboard forming the pads shall be slit-scored and folded to provide a minimum inside face width of 2-1/2 inches and a clearance not less than one inch between the cabinet and the inside walls of the box.

5.3.2.3 Commercial. Each set up cabinet, packaged as specified in 5.2.2.2 shall be packed in a fiberboard box to insure delivery at destination, to provide for redistribution by the initial receiving activity, and shall be acceptable by common carrier under National Motor Freight Classification and Uniform Freight Classification.

5.4 Palletization.

5.4.1 Knocked down. Unless otherwise specified (see 6.2), 13 knocked down cabinets, packed as specified in 5.3.1.1 or 6.3.1.2 shall be palletized in the prone position. The pallet shall be the same length and width as the containers to be placed thereon with a tolerance of +1/4 inch-0, and shall be of the design shown in figure 13. The pallets shall be assembled with a minimum of two nails at each location. The containers shall be placed on the pallet in a single stack and secured in place with three straps located in the girthwise direction as follows: One strap shall be located 12 ± 1 inch from each end and the third shall be located on center ± 6 inches. The strapping shall be 5/8 x .015 inch (min.) flat steel. Preformed edge protectors, metal or plastic, shall be used at the top under each strap to prevent the strapping from damaging the containers.

5.4.2 Set up. Unless otherwise specified (see 6.2), two type I, class 1, size 1; type II, class 1, size 1 or type III, class 1, size 1 set up cabinets packed as specified in 5.3.2.2 shall be palletized face-to-face in their normal upright position. The pallet shall be the same length and width as the containers to be placed thereon with a tolerance of +1/4 inch -0 and shall be of the design shown in figure 14. The pallets shall be assembled with a minimum of two nails at each location. The containers shall be placed on the pallet and secured in place with 2 straps located as follows: One strap shall be located 18 ± 1 inch from each end in the girthwise direction. The strapping shall be 5/8 x 0.15 inch (min.) flat steel. Preformed edge protections, metal or plastic, shall be used at the top under each stap to prevent the strapping from damaging the containers.

5.5 Marking. Marking shall be as specified in the contract or order.

5.5.1 Special marking.

5.5.1.1 Set up cabinets. In addition to the markings required by 5.5, each shipping container for a set up cabinet shall be marked as follows in characters a minimum of 2 inches high:

The upper corner of each side and end panel shall be marked with the word "UP" and an arrow pointing to the top of the container.

One side and one end of the container:

FURNITURE
FRAGILE-HANDLE WITH CARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

The top panel of the container:

TOP
THIS SIDE UP
FRAGILE-HANDLE WITH CARE

Additionally, to facilitate color identification, one side and one end of each container shall have an area approximately 3 inches wide by 8 inches high painted to match the color of the cabinet contained therein. See figures 11 and 12 for details.

5.5.1.2 Knocked down cabinets. In addition to the markings required by 5.5, each shipping container for a knocked down cabinet shall be marked as follows:

The upper corner of each side and end panel shall be marked with the word "UP" in characters a minimum of 2 inches high, and a arrow pointing to the top of the container.

One side and one end of the container, in characters a minimum of 1 inch high:

FURNITURE
FRAGILE-HANDLE WITH CARE

The top of the container, in characters a minimum of 2 inches high:

TOP
THIS SIDE UP
FRAGILE-HANDLE WITH CARE

Additionally, to facilitate color identification, one side and one end of each container shall have an area approximately 3 inches wide by the depth of the box painted to match the color of the cabinet contained therein. See figures 11 and 12 for details.

6. NOTES

6.1 Intended use. The cabinets covered by this specification are intended to be used in conjunction with other items in the contemporary style steel office furniture line. They can be grouped with 18 inch deep contemporary style lateral files and/or overfiles covered by other Federal standardization documents to provide 80-9/16 inch or 64-3/4 inch high linear arrangements that fit individual storage requirements. The cabinets are not intended to be a replacement of items covered by specification AA-C-31 in offices equipped with the more traditional style steel office furniture.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Type, class, size, and style of cabinet required (1.2.1).
(c) When preproduction sample requirements are waived (3.1).
(d) When master keys required and quantity required (3.2.2.1.2).
(e) When locks to be keyed so key can operate more than one cabinet (on orders of 125 cabinets or less) (3.2.2.1.2).
(f) Color of finishing enamel (3.2.3.1.3).
(g) If cabinets to be shipped set-up or knocked-down (3.3.5).
(h) When special or military identification marking is required (3.6).
(i) When specific test facilities and services are required (See 4.1).
(j) Level of packing required (5.2).
(k) When palletization not required (5.3).
(l) Whether civil or military marking of packages is required (5.4).

6.3 Color panels. A sample panel of the specified enamel finish is obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, DC 20407 or from the Business Service Center in the nearest General Services Administration Regional Office.

6.4 Chromium finish samples. Sample panels showing the standard chromium finish can be obtained from the Standardization Division, Federal Supply Service, General Services Administration, Washington, D.C. 20406.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

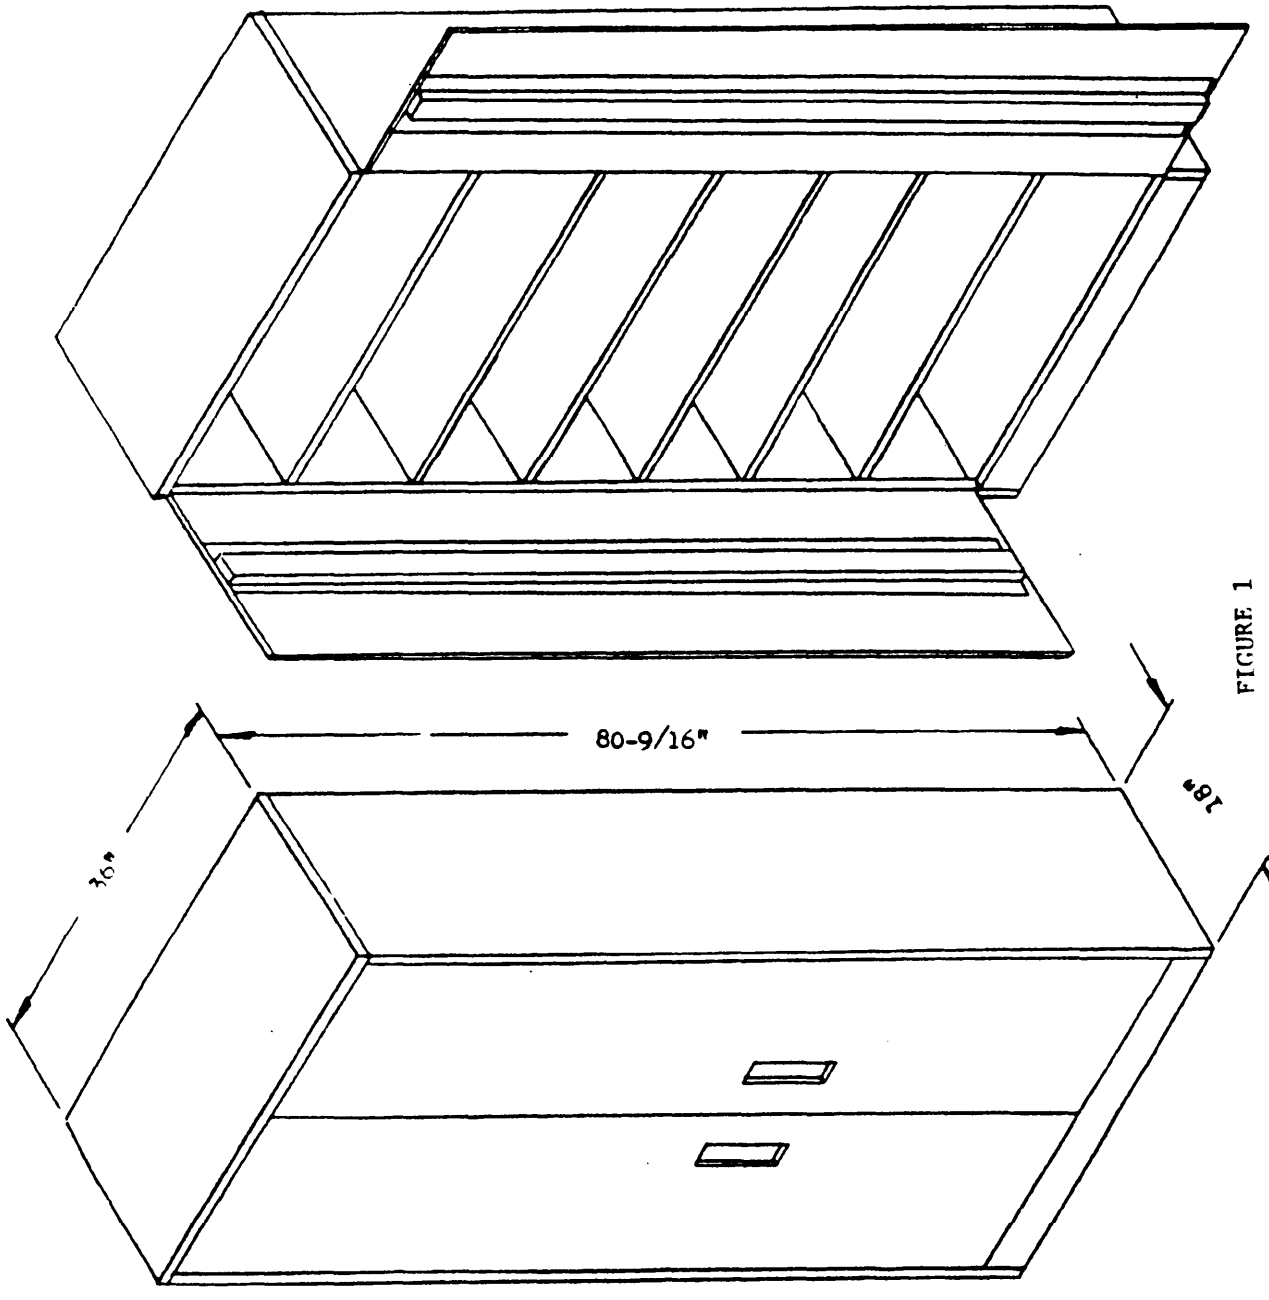


FIGURE 1
Type I, Class 1
Size 1

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

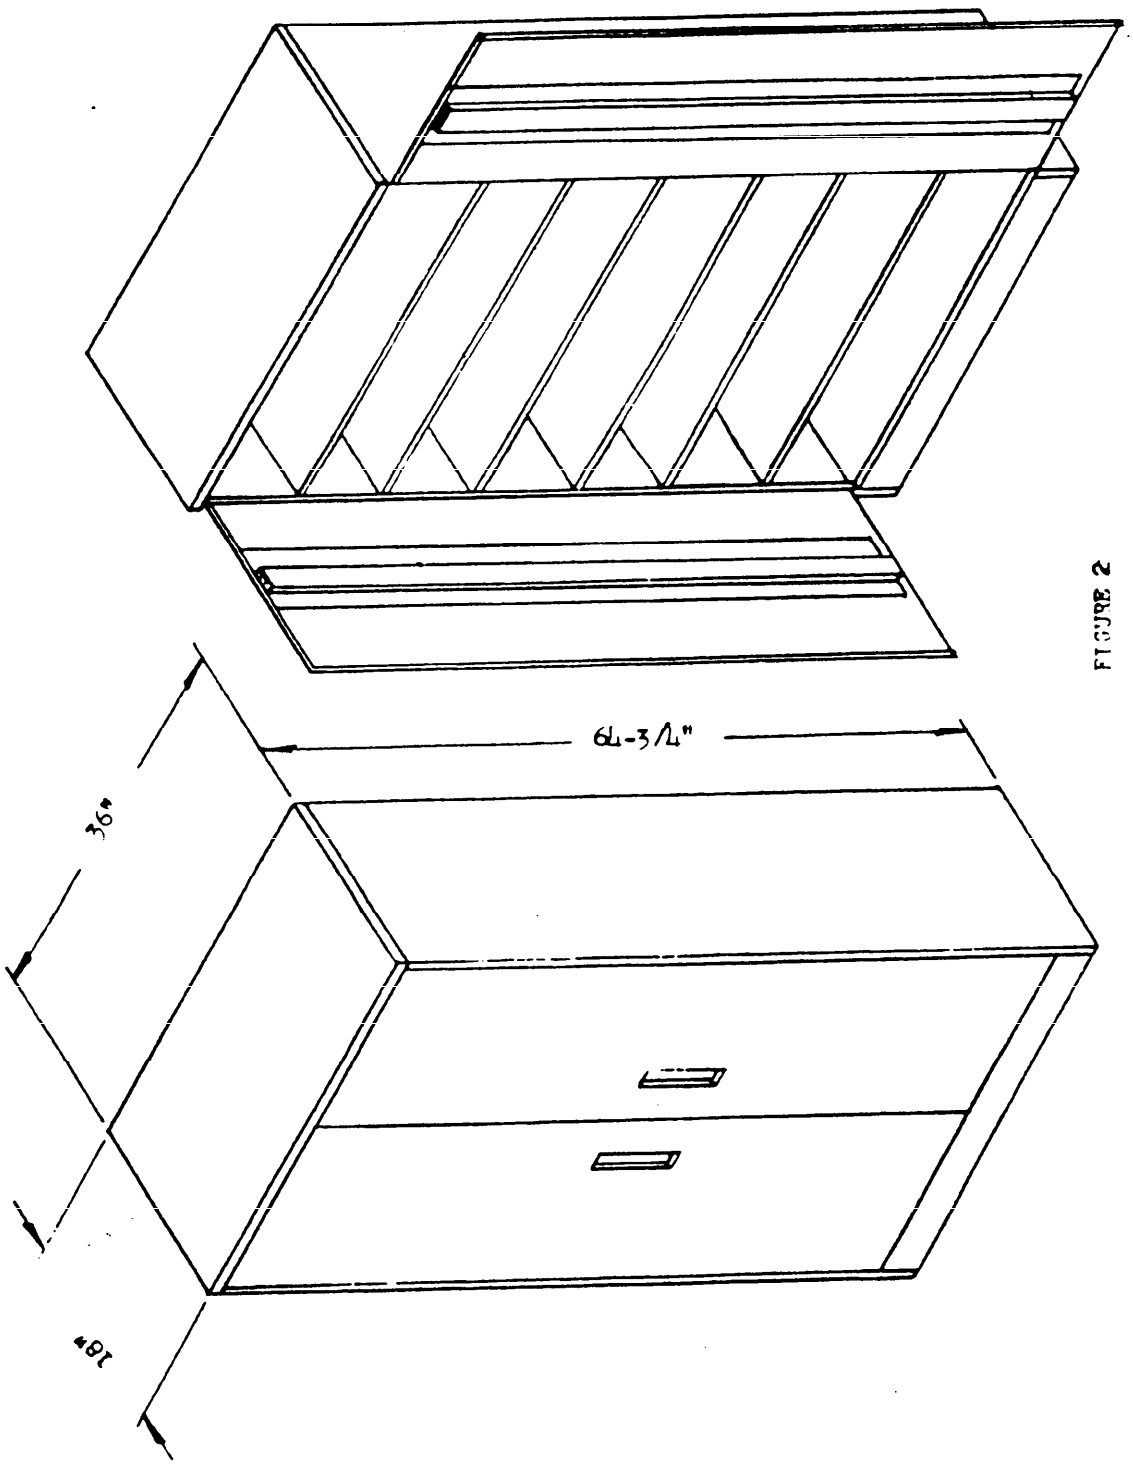


FIGURE 2
Type I, Class 1
Size 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

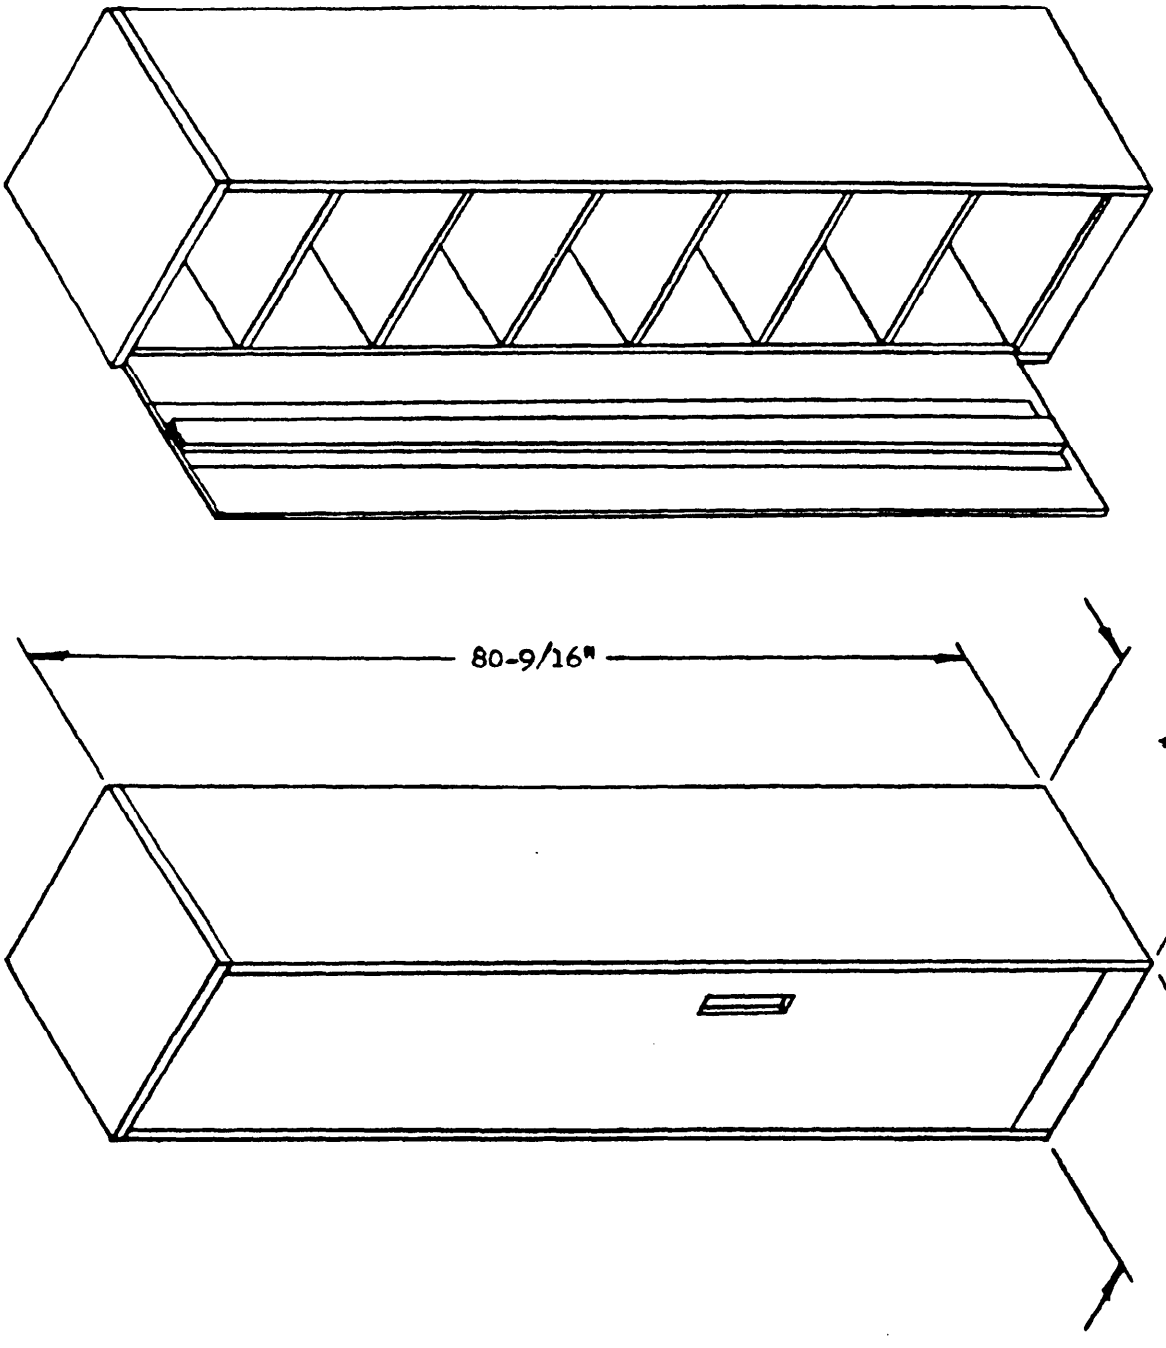


FIGURE 3
Type I, Class 2
Size 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

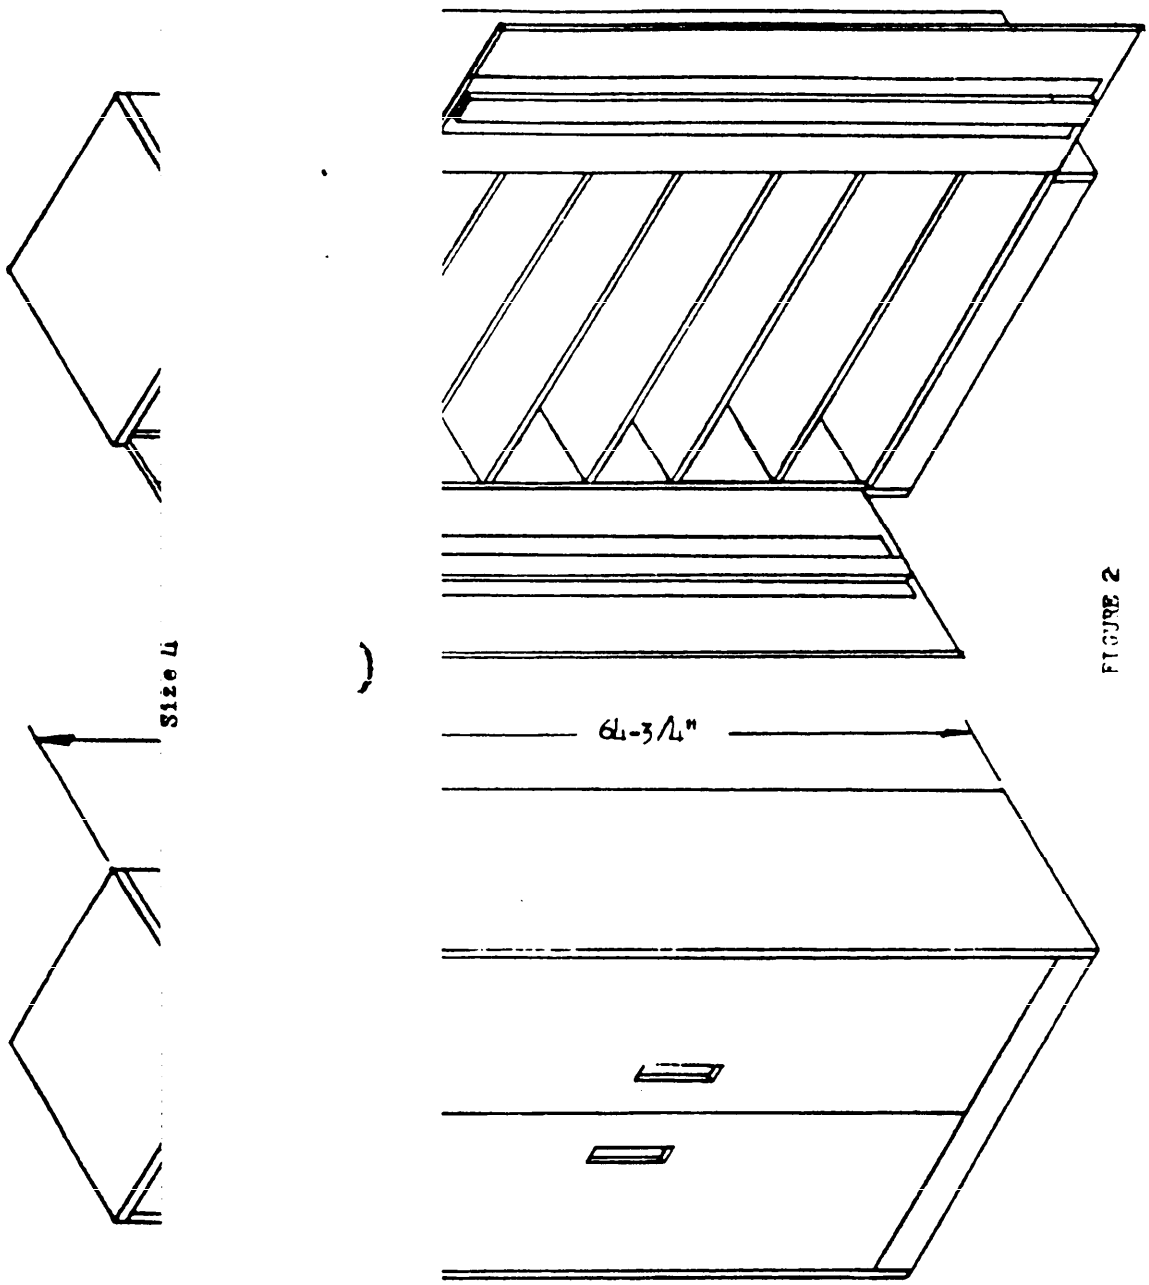


FIGURE 2
Type I, Class 1
Size 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

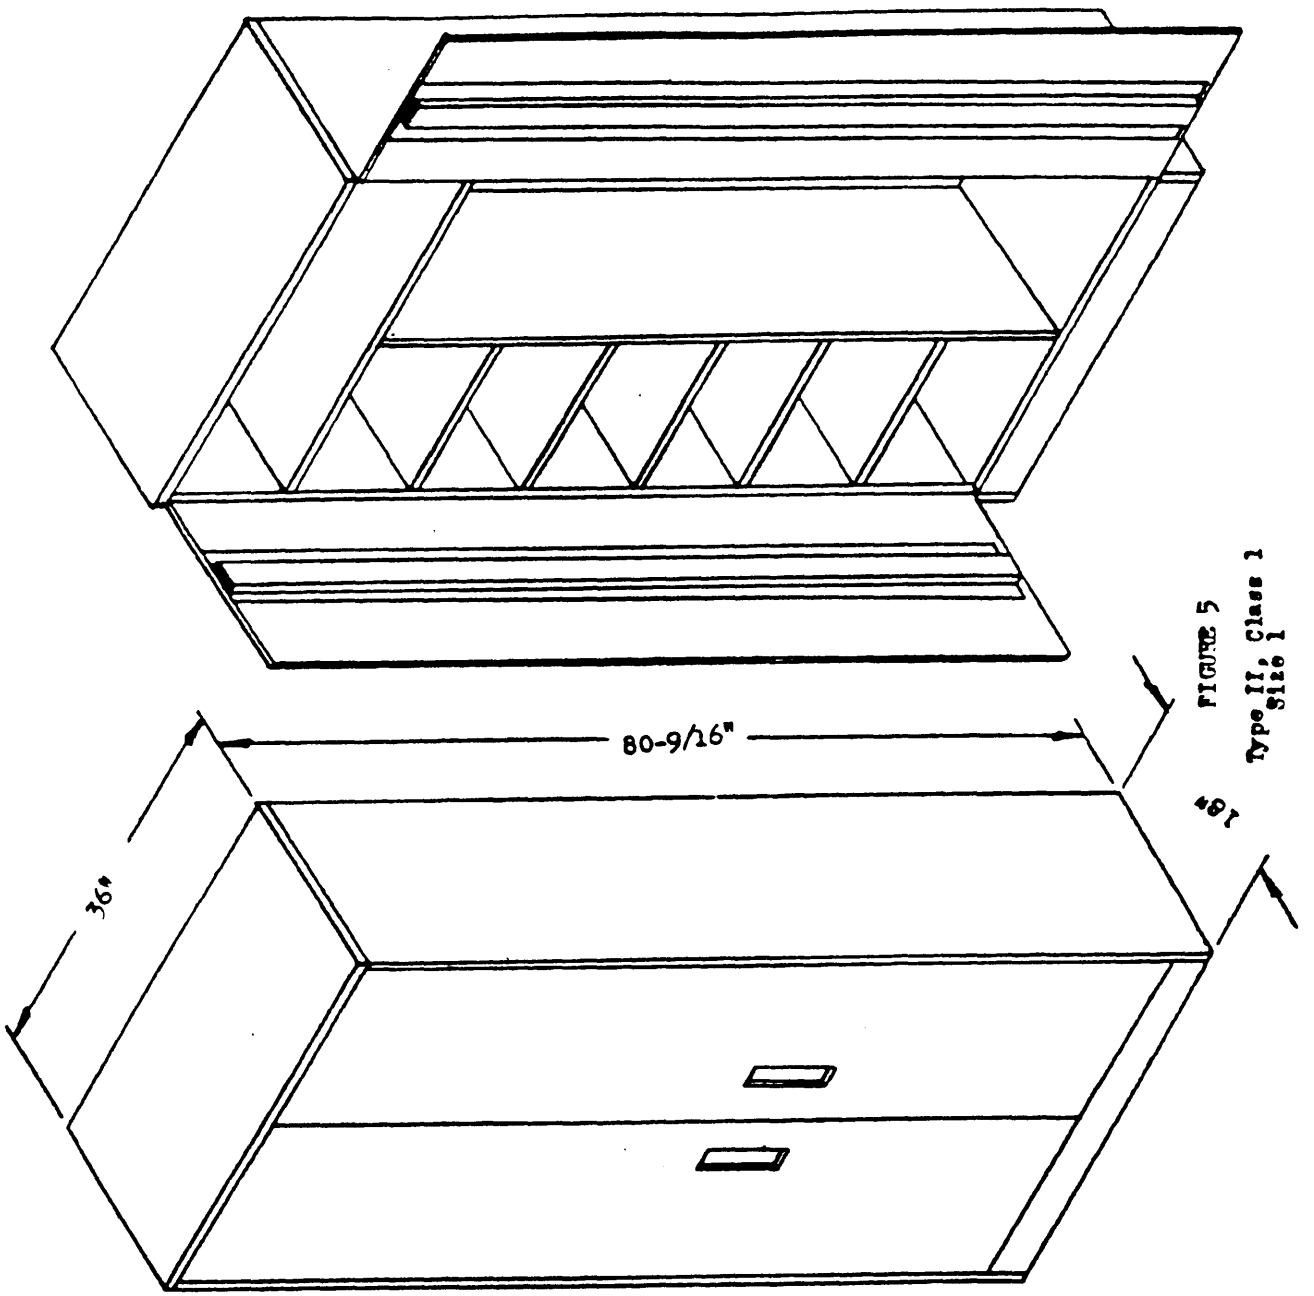


FIGURE 5
Type II, Class 1
Size 1

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

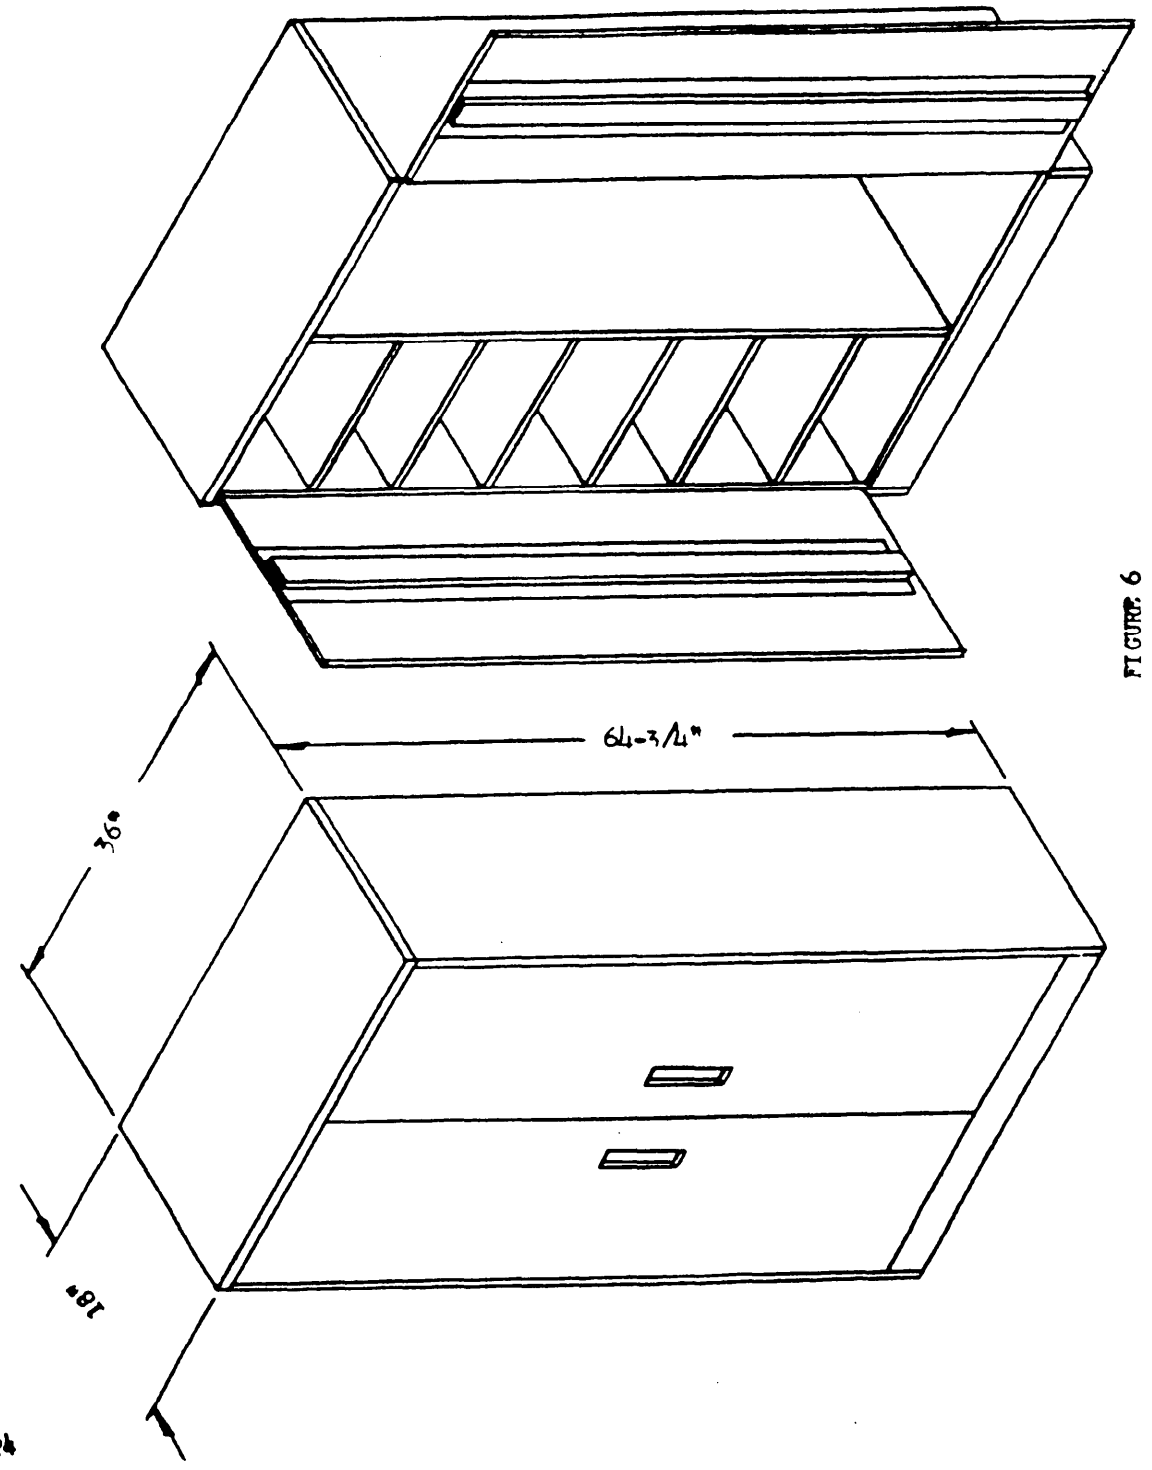


FIGURE 6

Type II, Class 1
Size 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the currentversion before use.

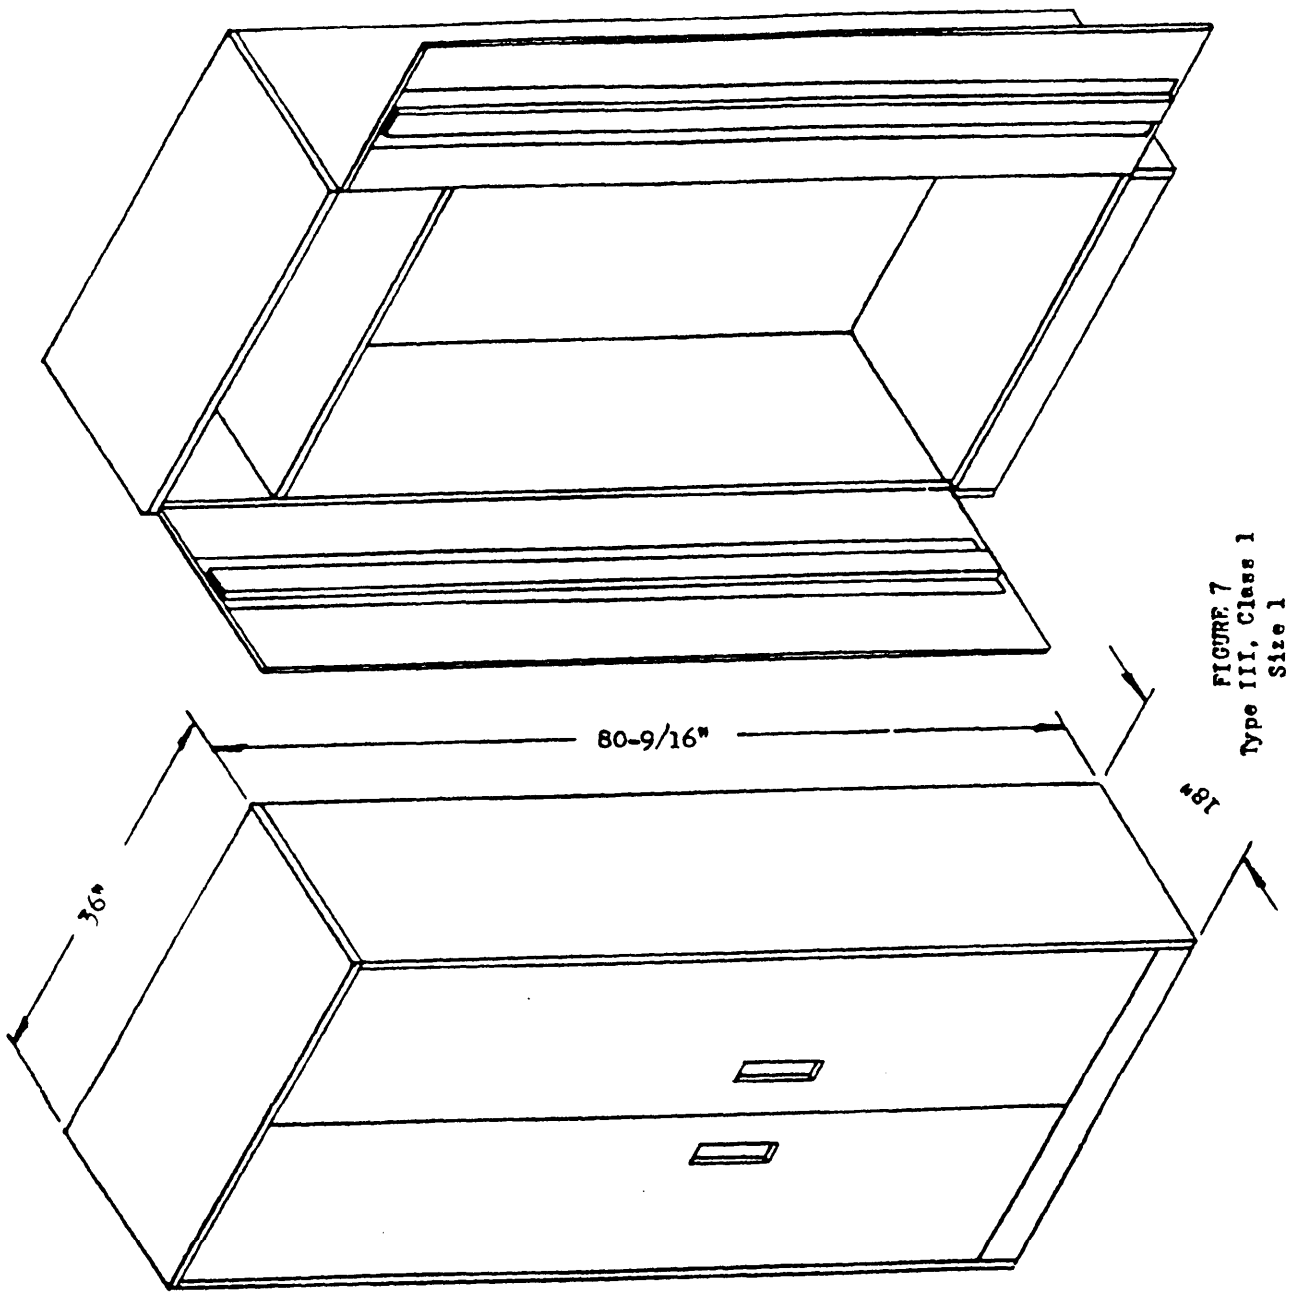


FIGURE 7
Type III, Class 1
Size 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

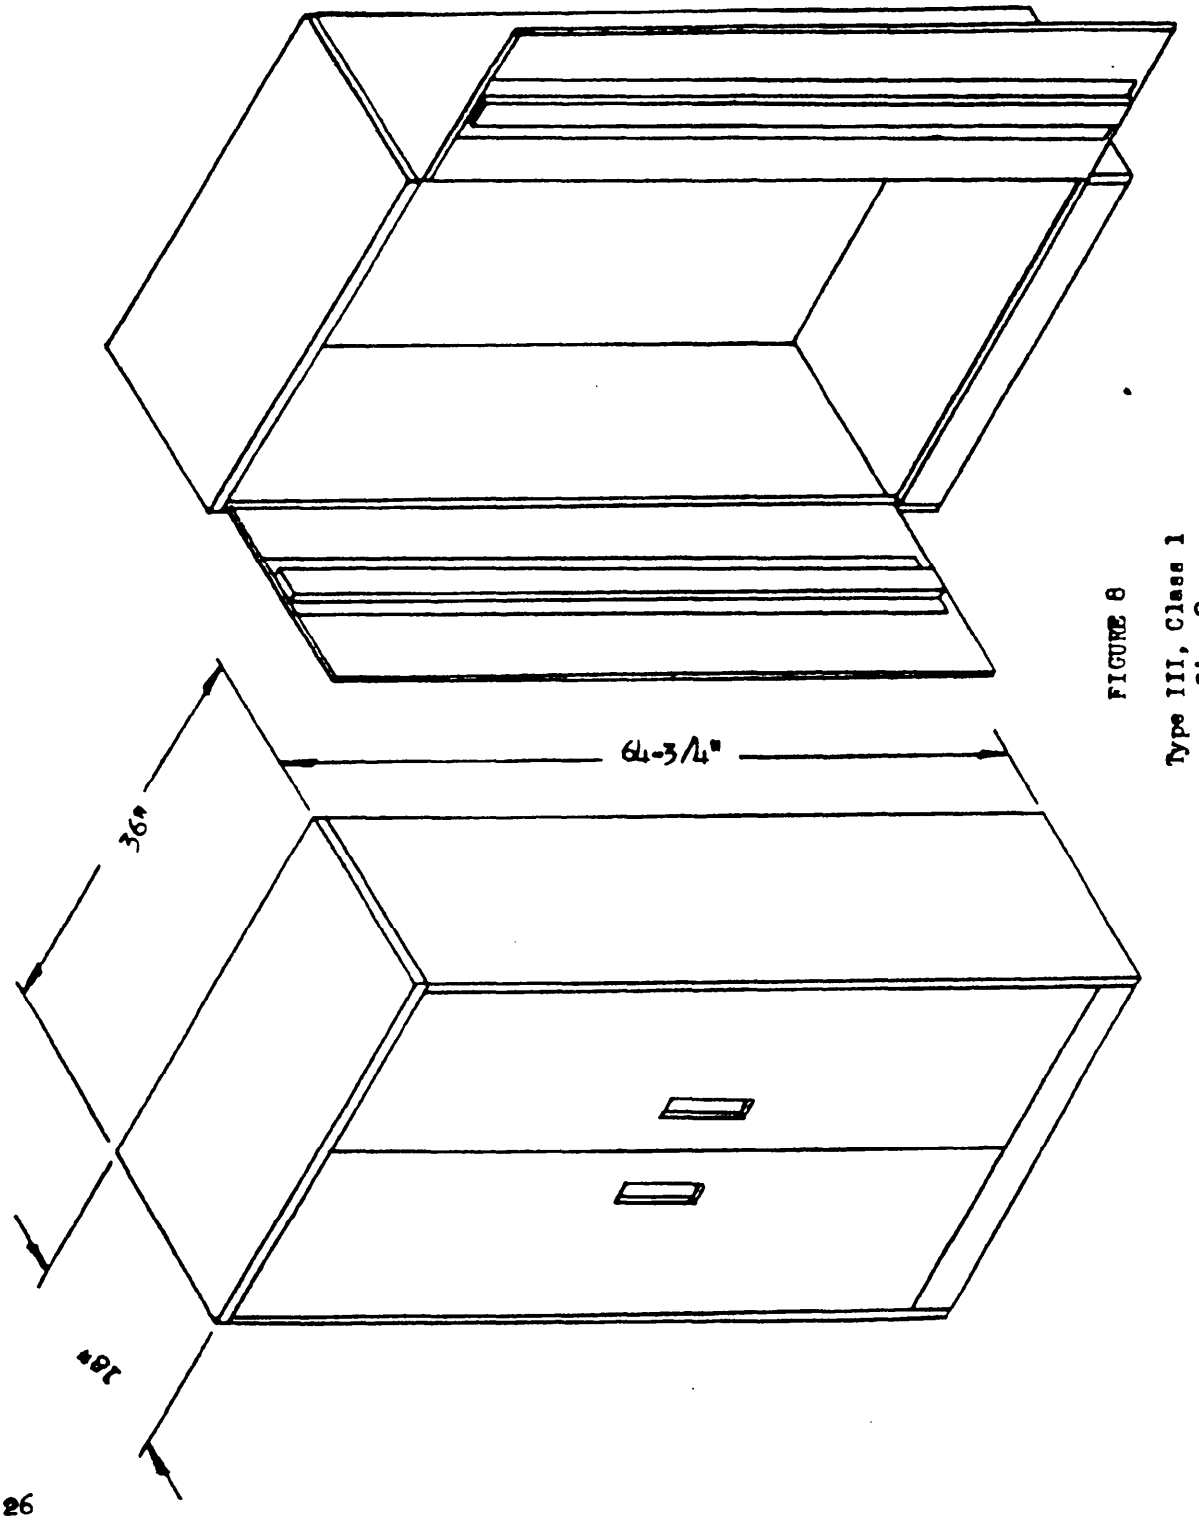


FIGURE 8
Type III, Class 1
Size 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

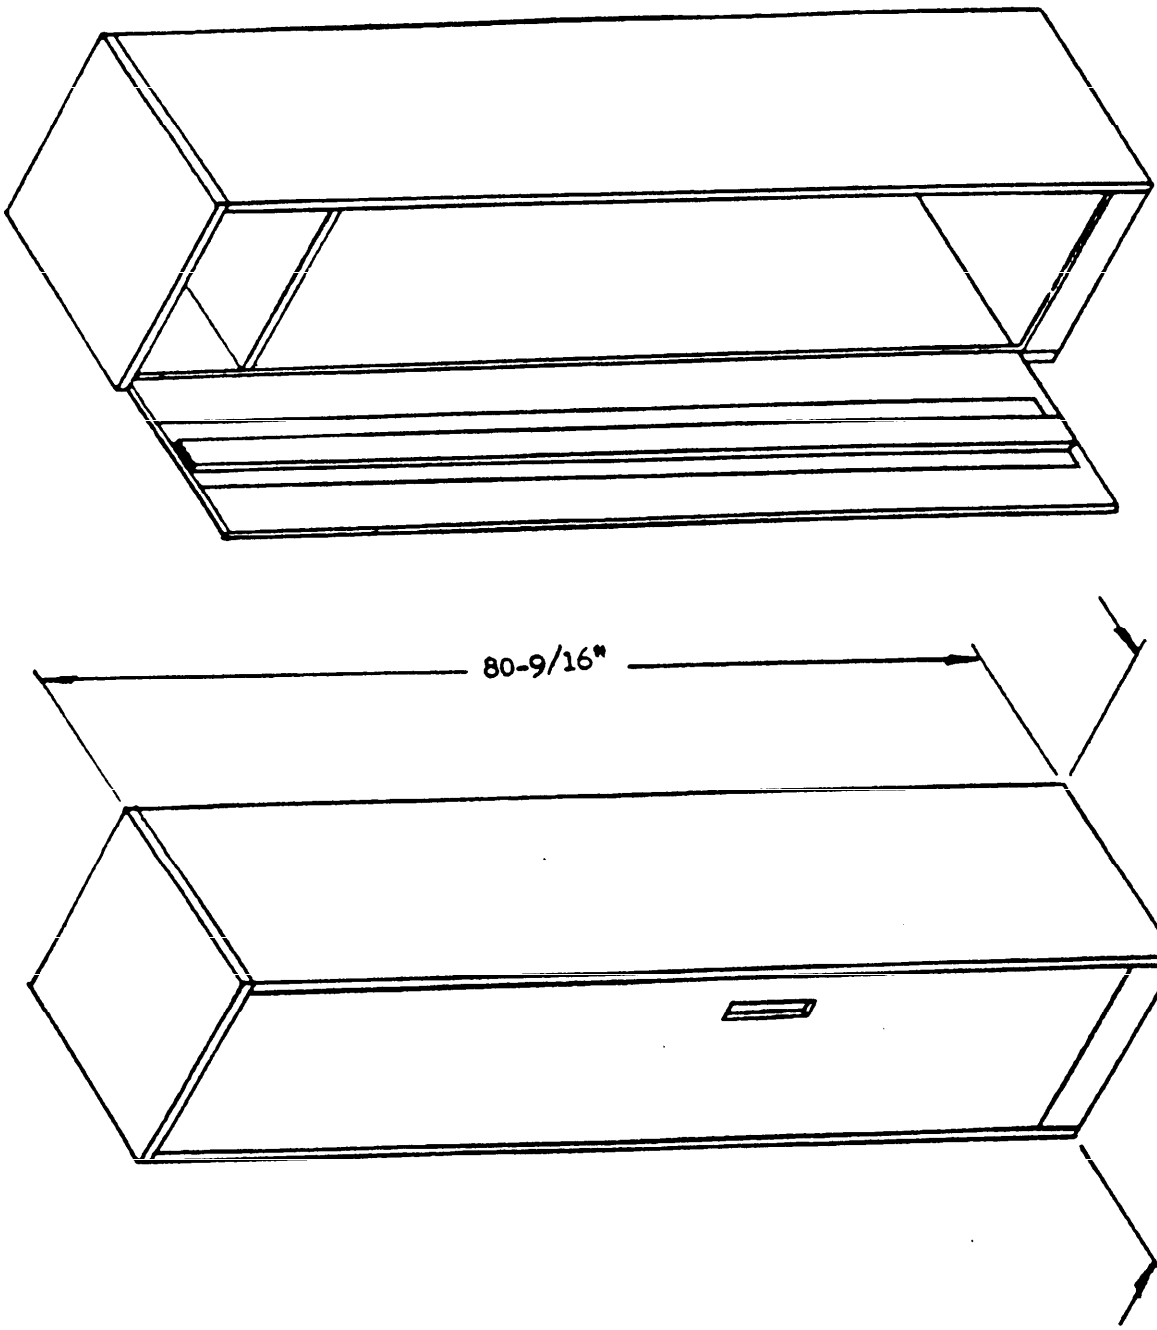


FIGURE 9
Type III, Class 2
Size 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


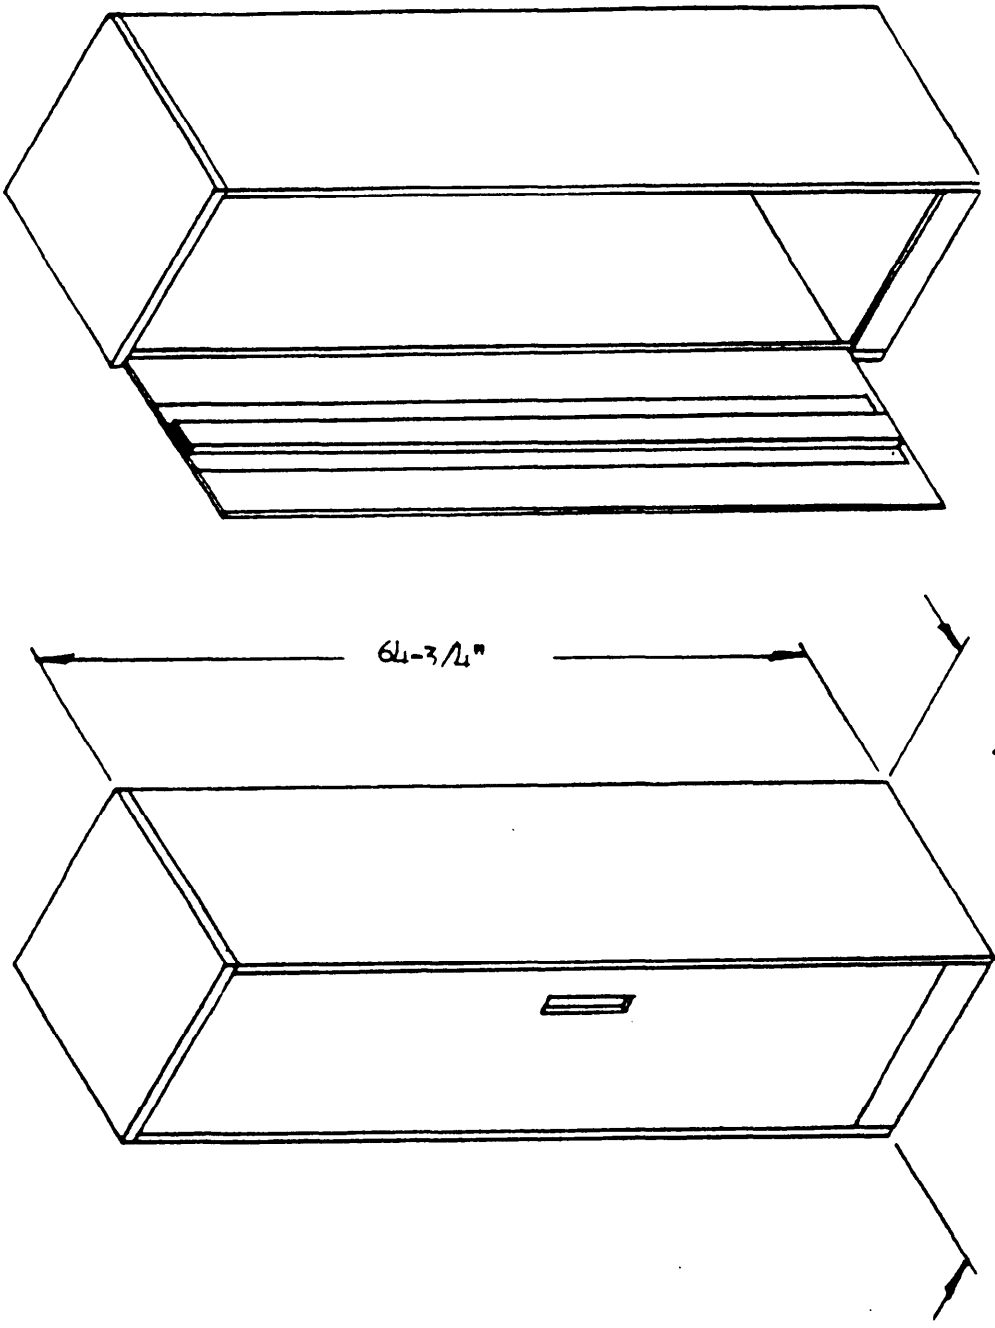


FIGURE 10
Type III, Class 2
Size 4


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

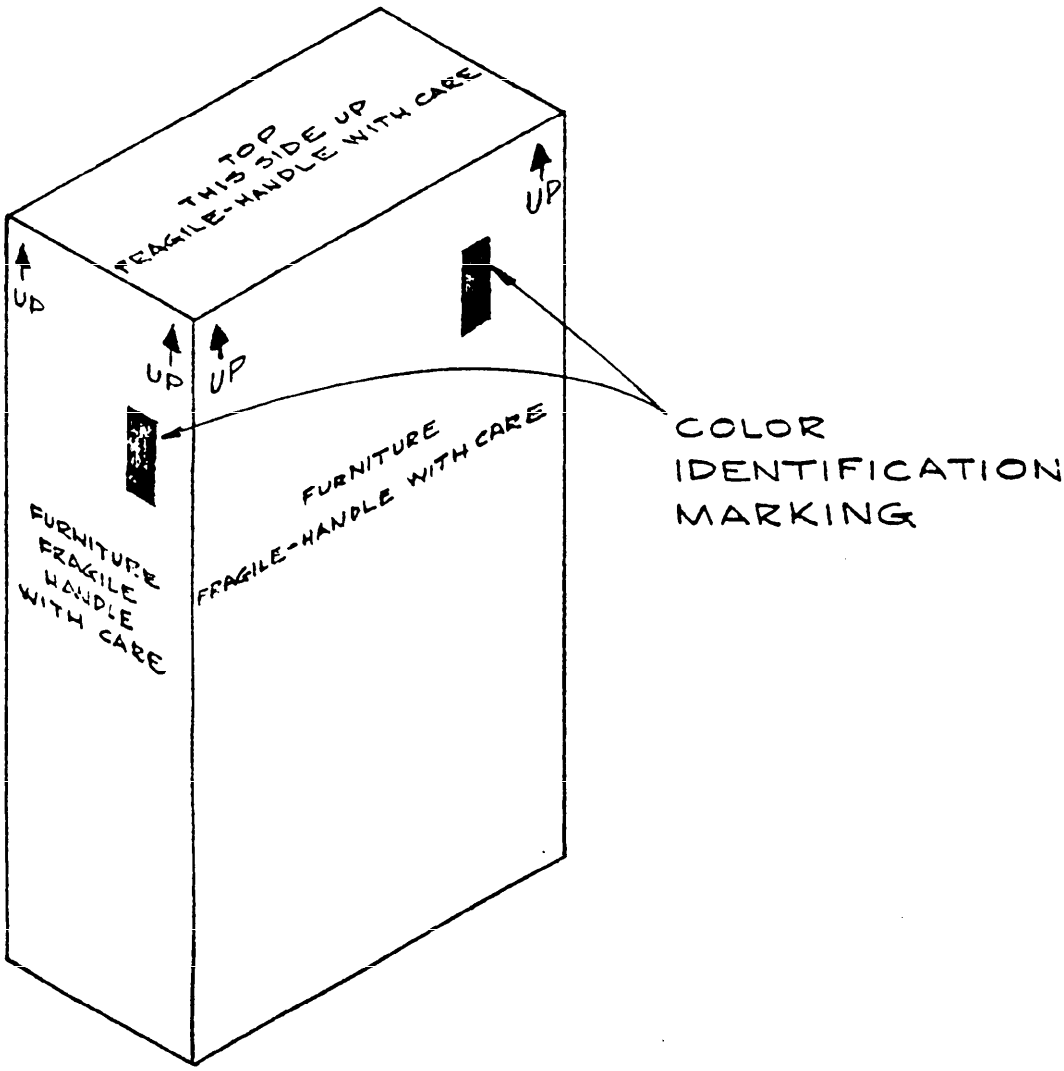

SPECIAL MARKING
SEE 5.5.1

FIGURE 11


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

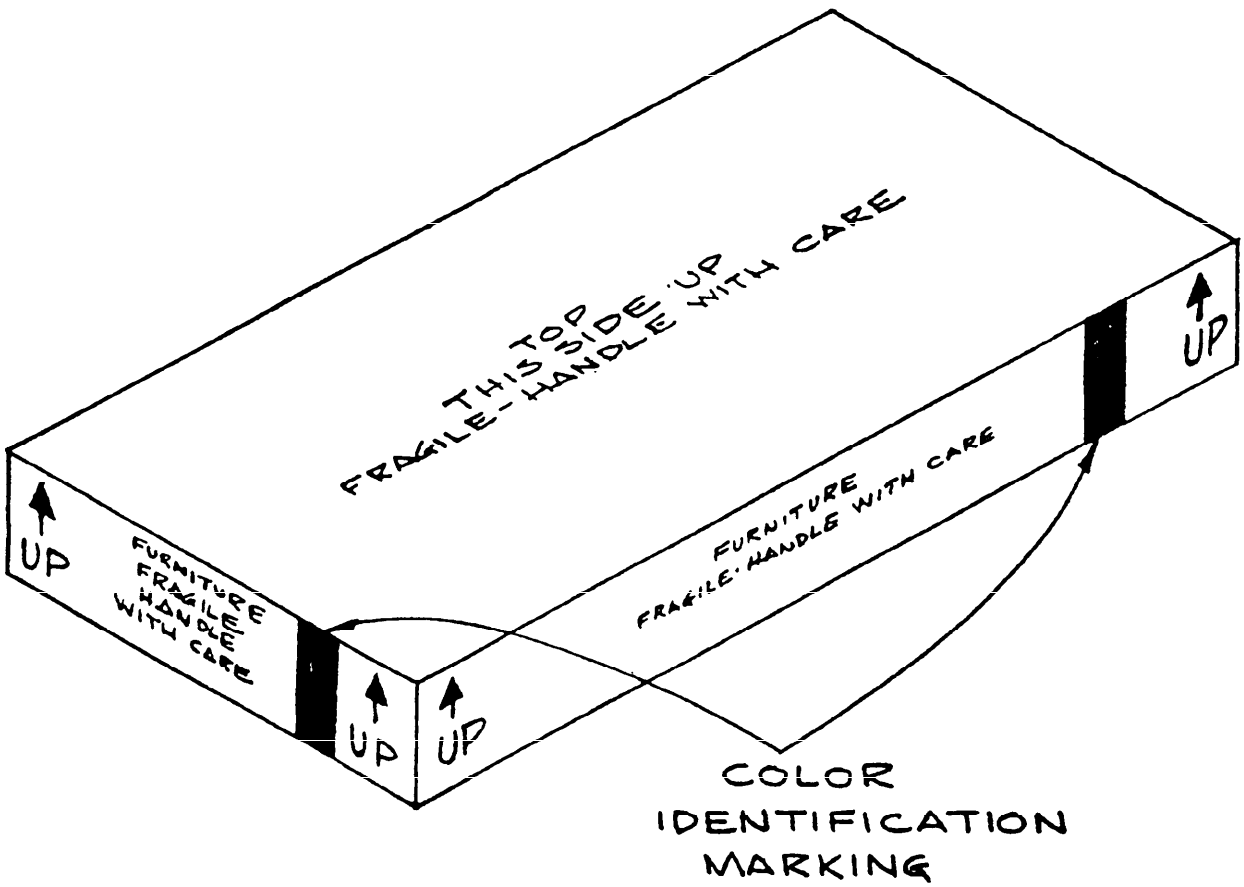

SPECIAL MARKING
SEE 5.5.1

FIGURE 12


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

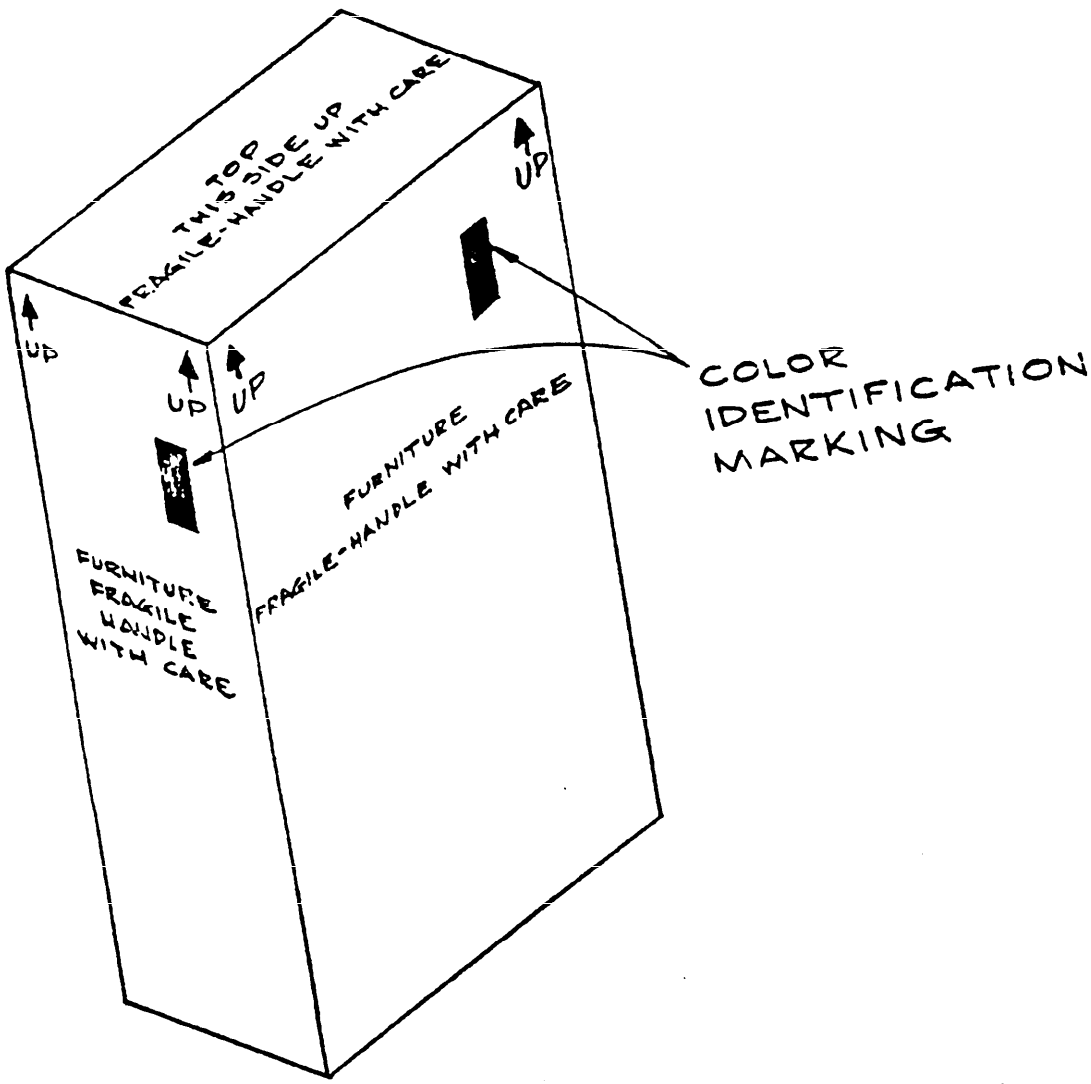


SPECIAL MARKING
SEE 5.5.1

FIGURE 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

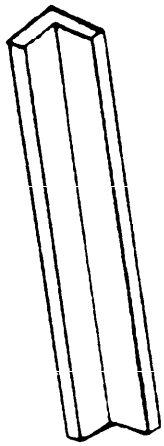

CORNER PAD
SEE 5.3.2.2.2

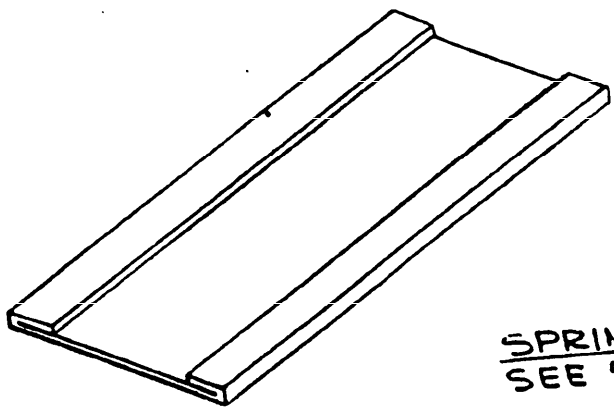

SPRING PAD
SEE 5.3.2.2.1

FIGURE 15

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.