AA-H-570a
October 11, 1962

SUPERSEDING
Fed. Spec. AA-H-570
August 24, 1959

FEDERAL SPECIFICATION

HOUSEHOLD FURNITURE, LIVING ROOM, WOOD, UPHOLSTERED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for upholstered, wood, living room furniture of specific detailed design and commercial design (see 6.1).

1.2 Classification.

1.2.1 *Classes and types.* Furniture covered by this specification shall be of the following classes and types, as specified (see 6.2):

Class 1.—Detailed design (see 3.4.1).
- Type I.—Davenport.
- Type II.—Chair, easy.
- Type III.—Chair, straight, occasional, w/arms.

Class 2.—Commercial design (see 3.4.2).
- Type I.—Davenport.
- Type II.—Chair, easy.
- Type III.—Chair, straight, occasional, w/arms.
- Type IV.—Chair, straight, occasional, w/o arms.
- Type V.—Davenport, sectional.
- Type VI.—Love seat (settee).

1.2.2 *Methods.* Furniture covered by this specification shall be upholstered in accordance with the following methods, as specified (see 6.2):

Method A.—Preassembled drop-in springs (classes 1 and 2).

Method B.—Hand-tied coil springs (class 2 only).

Method C.—Sinuous-type springs or flat steel base (class 2 only).

2. APPLICABLE SPECIFICATIONS, STANDARDS, DRAWINGS, AND OTHER PUBLICATIONS

2.1 Specifications, standards, and drawings. The following specifications, standards, and drawings, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-378—Plastic Film, Polyethylene Thin Gauge.

P-W-158—Wax, General Purpose, Solvent Type.

V-F-106—Fasteners, Slide, Interlocking.

V-T-276—Thread, Cotton.

KK-L-291—Leather, Cattlehide, Upholstery.

TT-F-336—Filler, Wood, Paste.

TT-I-542—Ink; Marking, Indelible, Black, For Fabrics.

TT-L-57—Lacquer, Rubbing, Clear (For Wood Furniture).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TT-S-190—Sealer, Sanding, Lacquer Type (For Wood Furniture).
TT-S-720—Stain: Wood, Non-Grain-Raising, Solvent-Dye Type.
TT-V-91 —Varnish, Shellac.
UU-P-268—Paper, Kraft, Untreated, Wrapping.
UU-P-271—Paper, Wrapping, Waterproofed Kraft.
CCC-A-700—Artificial Leather, Cloth, Coated, Vinyl Resin, (Upholstery).
CCC-C-467—Cloth, Jute (or Kenaf), Burlap.
CCC-F-66—Fabrics, Upholstery.
CCC-T-191—Textile Test Methods.
DDD-L-20—Label; For Clothing, Equipage, and Tentage, (General Use).
DDD-S-420—Slip Cover, Furniture, Upholstered.
MMM-A-100—Adhesive, Animal—Glue.
MMM-A-125—Adhesive, Casein-Type, Water-And Mold-Resistant.
MMM-A-188—Adhesive: Urea-Resin-Type (Liquid and Powder).
MMM-A-193—Adhesive, Vinyl Acetate Resin Emulsion.
PPP-B-591—Boxes, Fiberboard, Wood-Cleated.
PPP-B-601—Boxes, Wood, Cleated-Plywood.
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636—Box, Fiberboard.
PPP-B-640—Boxes, Folding, Fiberboard, Corrugated, Triple Wall.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Test Method Std. No. 141—Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing.
Fed. Std. No. 751—Stitches, Seams, and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL-A-140—Adhesive, Water-Resistant, Waterproof Barrier-Material.
MIL-R-5001—Rubber; Latex Foam Sponge.
MIL-W-6110—Wood; Determination of Moisture Content Of.
MIL-H-10368—Hair, Bound; For Padding on Military Vehicles.
MIL-L-10547—Liners, Case, Waterproof.
MIL-C-11456—Crates; Wood, Nailed, Unsheathed; Domestic Shipment, 1500 Pound Maximum Load.
MIL-B-13239—Barrier Material, Waterproofed Flexible, All Temperature.
MIL-C-40002—Cloth, Cotton, Denim, Upholstery.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.
MIL-STD-130—Identification Marking of U. S. Military Property.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Quartermaster Corps' Drawings:

5-8-121—Household Furniture, Living Room, Wood, Upholstered, Illustrations and Sections. Davenport, Chair, Easy; Chair, Straight, Occasional, W/Arms. (Figure 1.)

5-8-122—Household Furniture, Living Room, Wood, Upholstered; Davenport. (Figure 2.)

5-8-123—Household Furniture, Living Room, Wood, Upholstered; Chair, Easy. (Figure 3.)

5-8-124—Household Furniture, Living Room, Wood, Upholstered; Chair, Straight, Occasional, W/Arms. (Figure 4.)

(Miniature copies of drawings 5-8-121, 5-8-122, 5-8-123, and 5-8-124, identified as figures 1, 2, 3, and 4 respectively, are attached for information purposes only.)

(Copies of Military Specifications, Standards, and Drawings required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

American Iron and Steel Institute Manual:

Steel Products Manual; Carbon Steel Wire and Rods.

(Copies may be obtained upon application to American Iron and Steel Institute, 150 East 42nd Street, New York 17, New York.)

U.S. Department of Agriculture Publication:

SRA-180, Cotton and Cotton Linters Standards.

(Copies may be obtained upon application to the Superintendent of Documents, U.S. Government Printing Office, Washington 25, D. C.)

Rubber Manufacturers' Association, Inc. Specification:

Buyers Specification Latex Foam (Revised 1 August, 1960).

(Copies may be obtained upon application to Rubber Manufacturers' Association, Inc., 444 Madison Avenue, New York, New York.)

American Society for Testing and Materials, Inc.:

ASTM Standard D 1055-T—Specification and Methods of Test For Latex Foam Rubber (tentative).

(Copies may be obtained upon application to American Society for Testing and Materials, Inc., 1916 Race St., Philadelphia 3, Pa.)

3. REQUIREMENTS

3.1 Preproduction samples. Unless otherwise specified (see 6.2), before production is commenced, two samples of the finished item covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items. One sample shall be of cut away construction consisting of frame with back and base spring construction including upholstery, and the other sample shall be completely assembled and upholstered.

3.2 Standard reference panels (for class 1 furniture). Standard reference panels for determining the acceptability of the finish or color of exposed wood members of class 1 furniture will be furnished by the contracting officer. The standard reference panels shall not be altered in any way (see 3.5.1.1.1).

3.3 Materials. The material shall conform to the referenced specifications and requirements specified hereinafter.

3.3.1 *Upholstery materials and slip covers.*

3.3.1.1 *Burlap.* The burlap shall be class 3, conforming to CCC-C-467.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.1.2 *Webbing.*

3.3.1.2.1 *Sheet webbing.* Sheet webbing shall be 17-ounce or heavier (36- by 36-inch basis) burlap cloth. A five-percent minus tolerance will be permitted.

3.3.1.2.2 *Strip webbing (method B furniture).* The strip webbing shall be 4 inches wide for seats and 3½ inches wide for backs. The webbing shall be uniformly woven of pure jute-fiber yarns with a woven selvage on both edges. Yarns shall be twisted 2-ply and there shall be not less than 16 ends and 10 picks per inch. The weight per 144 yards shall be not less than 17 pounds for the 3½-inch-wide webbing and 22.5 pounds for the 4-inch-wide webbing. Breaking strength in warp direction for the 3½-inch-wide webbing shall average not less than 270 pounds and for the 4-inch webbing not less than 300 pounds. The tests for breaking strength shall be determined in accordance with 4.4.3.

3.3.1.3 *Cambric.* Cambric shall contain not less than 48 threads per inch in the warp and not less than 42 threads per inch in the filling and shall weigh not less than 3.2 ounces per linear yard, 30-inch-width basis. The cambric shall be black and the face side shall be glazed.

3.3.1.4 *Cotton felt.* The cotton felt shall be thoroughly cleaned and well garnetted so as to produce unbroken laminated sheets of interlaced garnetted felt, equal in quality to a blend made from 75 percent linters conforming to 3.3.1.4.2 and not less than 25 percent cotton conforming to 3.3.1.4.1. The cotton felt shall weigh not less than 14 ounces per yard, 27-inch-width basis.

3.3.1.4.1 *Cotton.* The cotton shall be new (not previously used), of 7/8-inch staple, and not lower in grade than Low Middling Spotted, conforming to the standards of the United States Department of Agriculture Publication No. SRA-180.

3.3.1.4.2 *Linters.* The linters shall be new (not previously used), and not lower in grade than United States standard grade number 4 and staple 4, conforming to the United States Department of Agriculture pamphlet titled "SRA-180, Cotton and Cotton Linters Standards".

3.3.1.5 *Twine (method B furniture).* The twine for tying the tops of the springs in the seat deck shall be of soft American hemp (cannabis sativa) or flax with a breaking strength of not less than 190 pounds and shall be six or more plies. The twine for tying the back springs shall be soft American hemp or flax with a breaking strength of not less than 115 pounds and shall be three or more plies. Twine, when used for sewing the springs to the foundation, shall be of flax, polished and having a breaking strength of not less than 65 pounds. Test for breaking strength shall be determined in accordance with 4.4.2.

3.3.1.6 *Thread.* All thread used shall conform to the requirements of V-T-276. Unless otherwise specified, (see 6.2), the color of the threads shall approximately match the color of solid-color material and the background color of pattern material. Colored thread shall show fair fastness to laundering when tested as specified in V-T-276.

3.3.1.6.1 *For machine seaming and stitching.* Seaming and stitching thread shall be type IB3, ticket No. 16, 4 ply.

3.3.1.6.2 *For closure of outside arms and backs.* Closure thread shall be neutral color, type IIIB, ticket No. 10/5, 5 ply.

3.3.1.6.3 *Tufting thread.* Tufting thread for stitching seat decks shall be neutral color type IIIB ticket No. 10/6 6 ply.

3.3.1.7 *Cord, jute welting.* Welting cord used shall be made from 8 plies of jute yarn, twisted to form a cord having a diameter of 1/8 to 3/16 inches, a weight of 205 feet (minimum) to the pound, and a minimum breaking strength of 215 pounds, when tested as specified in 4.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.1.7.1 *Cotton welt or jacket cord (class 2 furniture).* The cotton welt or jacket cord shall be 1/8- to 3/16-inch diameter having soft cotton center and piping braid cover, it shall withstand washing and dry cleaning, and may be used on class 2 furniture.

3.3.1.8 *Rubber.*

3.3.1.8.1 *Foam rubber.* The foam-rubber slab stock shall be type II, class medium, grade C, conforming to MIL-R-5001, except that the compression resistance shall be measured by method A in lieu of method B as specified, and that the low-temperature requirement shall be waived.

3.3.1.8.2 *Molded foam-rubber cushion.* Unless otherwise specified for class 2 furniture (see 3.4.2.2.7.2), the molded foam rubber for the construction of the cushions shall conform to type I, class medium, grade C, of MIL-R-5001, except that the low-temperature requirements are waived.

3.3.1.8.3 *Pin-core foam-rubber cushions (class 2 furniture).* When specified for class 2 furniture (see 6.2), the pin-core foam rubber shall conform to MIL-R-5001. Rubber for the seat cushions shall be type I, grade C, medium density, or conform to RC 25 of ASTM Standard D 1055-59T; for back cushions, type I, grade C, soft density, or conform to RC 15 of ASTM Standard D 1055-59T. The material shall be cored from both sides, with approximately 3/16-inch-diameter cores. Not more than 50 percent of the cushions supplied on one order may contain one vertical seam, except for ears on "L" or "T" cushions, provided the seam is not less than 5 inches from the end and that the pieces are securely, evenly and smoothly bonded together. Bonded shredded foam, loose foam, or quilt patch fabrication shall not be allowed.

3.3.1.8.3.1 *Flat cushions.* Flat or uncrowned cushions shall be of the material specified in 3.3.1.8.3 and of such thickness as will conform with design requirements. The edges of cushions cut from such material need not be banded with foam rubber.

3.3.1.8.3.2 *Crowned cushions.* The crowned, pin-core cushions shall be of the material specified in 3.3.1.8.3 and shall be crowned both sides and from front to back on both top and bottom. The contour on two ends shall be achieved by boxing that will produce an even contour on the top and bottom sides. Boxed edges shall be banded with ½-inch-thick slab rubber of the same density as the pin-core. The banding shall be 3 inches wide before applying, and shall be centered to give an even contour to both sides. The banding shall be cemented to the pin-core cushion and the seams shall be carefully closed without openings or gap between the cushion and the banding. Unless otherwise specified (see 6.2), the crowned portion of seat cushions shall be 5 inches thick (commercial tolerance) and the back cushions shall be 4 inches thick (commercial tolerance), and need not be crowned.

3.3.1.9 *Upholstered padding material.* The upholstered padding shall be bound hair conforming to class 1 of MIL-H-10368, with the following exceptions:

> "Hair shall be 15 percent cattle-tail hair and 85 percent hog hair; binding elastomer shall be polychloroprene latex, natural-rubber latex, butadiene-styrene latex, or a mixture of natural-rubber latex and butadiene-styrene latex, with qualities and characteristics conforming to MIL-H-10368; density shall be 0.0010 to 0.0013 pounds per cubic inch; and compressibility shall be 0.4 to 0.9 pounds per square inch."

Thickness of the bound hair shall be a minimum of 1½ inches, except when used for padding inside of arm, when it shall be ⅝ inch; and except for class 1, type III chairs, when it shall be ⅝ to ¾ inch thick. Foam rubber specified in 3.3.1.8.1 shall be bonded to the bound hair. Thickness of foam rubber shall be a minimum, of 3/8 inch. Units of upholstered padding material for backs shall be provided with continuous cloth taped edging on all edges. A layer of cotton specified in 3.3.1.4 may be substitut-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

ed for the foam rubber and taped edging on class 2 furniture items.

3.3.1.10 *Base insulator material.* Base insulator material used for class 1 furniture shall be composed of bound hair conforming to class 2 of MIL-H-10368 with the following modifications: Hair shall be 100 percent hog hair; the density shall be 0.0020 to 0.0035 pounds per cubic inch and the compressibility shall be 0.8125 to 3.2 pounds per square inch. Binding elastomer shall be polychloroprene latex, natural-rubber latex, butadiene-styrene latex or a mixture of natural-rubber latex and butadiene-styrene latex, with qualities and characteristics conforming to MIL-H-10368. Thickness of bound hair shall be a minimum of ⅝ inch. Cotton scrim or netting with a minimum weight of 2 ounces per square yard shall be bonded to the back of the bound hair, and foam rubber as specified in 3.3.1.8.1 shall be bonded to the bound hair on the face side. Thickness of foam rubber shall be ⅜ inch. A layer of cotton specified in 3.3.1.4 may be substituted for the foam rubber and taped edging on class 2 furniture items.

3.3.1.11 *Tacks, nails, staples, drive screws, screws, and bolts.* Tacks and staples shall be upholstery, commercial type. Tacks used to secure strip or sheet webbing shall be 12-ounce size. Staples, when used for securing sheet webbing, shall be of wire size not less than 0.050 by 0.020 inch, with legs ½ inch long. Tacks or staples for securing burlap and stuffing materials shall be 6-ounce-size tacks, or staples of wire size not less than 0.030 by 0.020 inch, with legs ⅜ inch long for securing burlap, and ½ inch long for stuffing materials. Tacks or staples for securing cambric and tape shall be 3-ounce-size tacks, or staples of wire size not less than 0.030 by 0.020 inch with legs not less than ⅜ inch long. Tacks or staples used for application of the basic fabric on the class 1 furniture shall be not less than 3-ounce-size tacks, or staples of wire size not less than 0.030 by 0.020 inch, with legs ⅜ inch long. Tack size and length of staple legs shall be increased to compensate for thicker material specified in the invitation for bids for class 2 furniture. All tacks shall be of blued steel. All staples shall be of steel, copper lacquer or zinc coated and shall be pneumatically driven. Nails for securing stabilizer clips to frame shall be a minimum length of ¾ inch, and shall be cement coated. Drive screws, or barbed cement-coated nails, if used in the securing of the drop-in type spring units (method A construction) to the wood frame, shall be of commercial type. Drive screws shall be a minimum of 1 inch in length and barbed cement-coated nails shall be a minimum of 1½ inch in length and provided with a fiber washer. Bolts and screws shall be commercial type of sizes indicated on applicable Quartermaster Corps Drawing 5-8-122, 5-8-123, and 5-8-124 (figs. 2, 3, and 4).

3.3.1.12 *Upholstery nails (class 1 furniture).* Upholstery nails for the occasional arm chair, class 1 furniture, shall be brass, or brass head with steel shank, French natural finish, with heads 7/16 inch in diameter. Nails shall be set uniformly head to head. All upholstery nails shall be carefully attached so that no marring of the cover results and that a straight alignment is maintained.

3.3.1.13 *Upholstery cover (class 1 furniture).*

3.3.1.13.1 *Denim.* Unless otherwise specified (see 6.2), denim used for the basic upholstering covers of the davenport and easy chairs shall conform to MIL-C-40002 and shall be Government furnished material.

3.3.1.13.2 *Artificial leather.* Upholstery material and gimp for the occasional arm chair shall be artifcial leather (synthetic-resin coated cloth), class 4, treatment *(a)*-1, regular flame resistant, and treatment *(b)*, mildew-resistant, conforming to CCC-A-700. Color and finish shall be as approved by the contracting officer.

3.3.1.13.3 *Slip covers.* The slip covers for the class 1, types I and II furniture shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

conform to the requirements of DDD-S-420, type I for davenport and type II for easy chair. The class and style shall be as specified (see 6.2).

3.3.1.14 *Upholstery covers (class 2 furniture).* The upholstery covers for class 2 furniture shall be fabric, artificial leather, or genuine leather as specified (see 6.2). All fabric upholstery covers, except bias covering for welting, shall be cut and applied (whether straight or crossgrain of the fabric) to maintain the vertical design of back and face of units, run front to back of seat cushions. Fabrics including stripes, striped effect (provincial design) and florals shall be centered and matched up and down, so that the unit when viewed from the front presents the design of the fabric centered and running from top border to front bottom edge. Top border of arms shall be paired in design but need not match other design. Pull strips of sheeting or drill cloth double stitched to the upholstery covers are permitted, provided that the upholstery material amply covers all exposed areas.

3.3.1.14.1 *Muslin.* Unless otherwise specified (see 6.2), muslin shall be unbleached and shall contain not less than 48 threads per inch in the warp and 48 threads per inch in the filling and shall weigh not less than 4.0 ounces per square yard.

3.3.1.14.2 *Fabrics.* The upholstery fabrics shall be as specified (see 6.2), and, when specified, shall meet the requirements of CCC-F-66. The covers shall be welted according to design requirements, using welt cord as specified in 3.3.1.7 and made as specified in 3.4.1.3.

3.3.1.14.3 *Leather, artificial.* Artificial leather (synthetic-resin coated cloth) shall conform to class 4, treatment *(a)*-1, regular flame resistant, and treatment *(b)*, mildew-resistant of CCC-A-700. Color and finish shall be as approved by the contracting officer.

3.3.1.14.4 *Leather, genuine.* Leather, when specified for class 2 furniture, shall conform to KK-L-291, selection A, type II, finish *(c)*. The color of the leather shall be as specified (see 6.2) and shall conform to the standard colors furnished by the procuring agency.

3.3.1.15 The labels shall conform to type I, class 9 of DDD-L-20 and shall show good fastness to laundering. The labels shall be printed in capital letters not less than ⅛ inch in height.

3.3.2 *Drop-in spring unit (method A furniture).* Drop-in type spring units shall be constructed as herein specified. The steel used for the construction of all springs and wires shall be upholstery spring wire, knotting and coiling quality with carbon range of 0.45 to 0.70 percent and with tensile strength conforming to the requirements of table III. The border wire shall conform to table IV (see tables I and II for gages and details). A certificate of compliance that the wire meets tensile-strength and carbon-content requirements will be acceptable. Installation to frames may be either of the following:

(1) Drive screws, a minimum length of 1 inch, or barbed, cement-coated nails 1½ inch long, insulated with fiber washers, located through eyelets on the ends of the base support crimp wires.

(2) Inserting the ends of the base support crimp wires a minimum length of ½ inch into holes drilled in the top of the base frame for this purpose.

The tee section of the davenport and easy-chair back shall be provided with tee springs or shall be taped with two pieces of standard upholstering webbing on each side, from the border wire to the arm-wing block. All assembled drop-in spring units shall be given a dip coating of enamel and baked, or components of the spring units shall be individually coated with a dip coating of enamel and baked. Any color of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

enamel is acceptable. Enamel coating of springs shall be applied, and fabrication and handling shall be such as to provide coverage of a minimum of 90 percent of the wire surface.

3.3.2.1 *Springs.* Springs shall be constructed in the sizes and gages indicated and the number of springs for each unit shall be as specified in table II. Springs shall be tempered and shall be of the single-cone type, except the tee spring, which shall be double-cone type. Single-cone springs shall be knotted one end and double-cone springs shall be knotted two ends. Each spring shall be wound to the base-support crimp wires at the intersection of the lengthwise and crosswise wires. Top diameter of springs on the outside edges of the units shall be attached to a border wire with metal clips and, in the case of corner springs, attached to the border wire with two clips. The seat unit corner tee springs of the davenport and easy chair shall be attached to the frame with a minimum of three staples, ½-inch-minimum length, 16-gage, No. 2, standard commercial quality. The front row of springs of the davenport and easy-chair seat units may be circular or squared at the intersection with the front edge of the border wire and may be either flat or provided with a rise on which to build up the front-edge padding as shown on Quartermaster Corps' Drawing 5-8-121 (fig. 1).

3.3.2.2 *Border wire.* The border wire for the various units shall be of the gage specified in table I and may be joined either by butt-welding or by the use of a 20-gage tube not less than 2 inches long. The border wire shall encompass the tee springs of the davenport and easy-chair seat. If tee springs are used in the davenport and easy-chair back, the border wire shall encompass these springs in the same manner. The border wire of the davenport and easy chair back unit shall provide a crown of 1¼ inches, plus or minus ¼ inch from top and bottom to center of the unit.

TABLE I.—*Steel parts, gage numbers* *

Parts	*Davenport*				*Chair, easy*				*Chair, occasional*	
	Seat		*Back*		*Seat*		*Back*		*Seat*	
	Gage	*Inch*	*Gage*	*Inch*	*Gage*	*Inch*	*Gage*	*Inch*	*Gage*	*Inch*
Border wire	7	0.1770	12	0.1055	7	0.1770	12	0.1055	9	0.1483
Links	15	.0720	15	.0720	15	.0720	15	.0720	15	.0720
Base support crimp wires	10	.1350	11	.1205	10	.1350	11	.1205	10	.1350
Top crimp or lace wires	14	.0800	15	.0720	14	.0800	15	.0720	14	.0800
Stabilizers	9	.1483	14	.0800	9	.1483	14	.0800	—	——
Insulated Clips **	24	.0239	—	——	24	.0239	—	——	—	——
Clips ***										

* Manufacturer's standard tolerance permitted.

** For attachment of stabilizers to wood rails, shall be a minimum of 3/4 inch in width, constructed of gage specified in table I, and shall be attached to the wood frame with a minimum of two nails specified in 3.3.1.11. Clips shall be insulated with a material similar to adhesive tape.

*** For attachment of seat unit border wire to springs, and stabilizers to border wire, shall be of the three-prong type, a minimum of 1-1/8 inch wide, constructed of steel of commercial 0.0359-inch thickness. For attachment of back unit border wire to springs, shall be approximately 1/2 inch wide, constructed of steel of commercial 0.0269-inch thickness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE II.—*Type of springs and their designated uses*

Type of spring	*Height, plus or minus 1/8 inch*	*Number of turns, plus or minus 1/2 turns*	*Gage* *		*Top diameter, plus 1/8 inch minus 0 inch*
No.	*Inches*		*Gage*	*Inch*	*Inches*
1	5-1/4	5-1/2	9	0.1483	4-5/8
2	5-1/4	6-1/2	11	.1205	4-5/8
3	6	6	9	.1483	4
4	5	6	12	.1055	5
5	6-1/2	6-1/2	12	.1055	5
6	4-1/4	5-1/2	9-1/2	.1416	4-1/4

* Manufacturer's standard tolerance permitted.

DESIGNATED USES

Davenport seat:	*Quantity*	*Type*	*Location*
Front row	2	No. 3	One each end
	11	No. 1	Across front
Second row	2	No. 1	One each end
	9	No. 2	Balance
Third row	2	No. 1	One each end
	9	No. 2	Balance
Back row	4	No. 1	Two each end
	7	No. 2	Balance
Total	46		
Davenport back:			
Top row	11	No. 4	
Center row	11	No. 5	
Bottom row	11	No. 4	Across
			Across
Total	33		Across
Chair seat:			
Front row	2	No. 3	One each end
	4	No. 1	Across front
Second row	2	No. 1	One each end
	2	No. 2	Balance
Third row	2	No. 1	One each end
	2	No. 2	Balance
Back row	2	No. 1	One each end
	2	No. 2	Balance
Total	18		

DESIGNATED USES

Chair back:	*Quantity*	*Type*	*Location*
Top row	3	No. 4	Across
Center row	3	No. 5	Across
Bottom row	3	No. 4	Across
Total	9		
Occasional arm chair seat:			
Front row	3	No. 6	Across
Center row	3	No. 6	Across
Back row	3	No. 6	Across
Total	9		

TABLE III.—*Upholstery spring wire knotting and coiling quality* *

Gage	Tensile strength range
	p.s.i.
9	180,000/215,000
9-1/2	182,500/220,000
11	190,000/230,000
12	195,000/235,000
13	205,000/250,000
14	220,000/265,000
15	225,000/270,000
16	230,000/275,000

* From American Iron and Steel Institute, Steel Products Manual; Carbon Steel Wire and Rods.

TABLE IV.—*Round high carbon wire and coils for borders, stabilizers, links, and crimp wire* *

Gage	Tensile strength range
	p.s.i.
7	160,000/190,000
9	165,000/200,000
10	170,000/205,000
11	175,000/210,000
12	180,000/215,000
14	200,000/240,000
15	210,000/250,000

* From American Iron and Steel Institute, Steel Products Manual; Carbon Steel Wire and Rods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE V.—*High tensile wire for sinuous type springs* *

Gage	Tensile strength range
	p.s.i.
8	215,000/245,000
9	220,000/250,000
10	225,000/255,000
11	230,000/260,000
12	235,000/265,000
13	235,000/265,000

* From American Iron and Steel Institute, Steel Products Manual; Carbon Steel Wire and Rods.

3.3.2.3 *Base-support crimp wires.* Horizontal base-support, cross crimp wires shall be of the gage specified in table I and shall intersect underneath each seat and back spring, with the exception of the tee springs. The horizontal base-support wires of the back unit of the davenport and easy chair shall terminate a minimum of 1 inch from the bottom of the coil spring, in order to provide free floating action of the unit. Likewise, the ends of the one front horizontal base support wire of the davenport and easy-chair seat unit may terminate in the same manner to provide the same action.

3.3.2.4 *Top crimp or lace wires.* Top crimp or lace wires shall be of the gage specified in table I and shall extend from border to border in both the width and the length dimension of the davenport, easy-chair, and occasional-chair seat and the davenport and easy-chair back so as to intersect the outside top coil diameter wire of each spring, except where the four stabilizers are attached to the davenport seat coils, as specified in 3.3.2.5. These top crimp or lace wires shall be provided with a crimp within the top coil diameter, in order to provide engagement with the links. All top crimp or lace wires shall be wound around the border wire in a manner whereby the wire end is pointed downward and falls inside the border wire.

3.3.2.5 *Stabilizers.* Stabilizers shall be of the gage specified in table I. The davenport seat shall be provided with six stabilizers, four within the seat section and one on each end. The four stabilizers within the seat section shall be clipped to the front border wire, continue and be clipped to the back border wire, and thence returned to be clipped to the front wood rail. These four stabilizer wires shall replace the top crimp or lace wires at these points and shall be linked through the outside top diameters of the four springs that these wires intersect, to adjoining lace wires. The two end stabilizers shall be clipped to the back border wire at the back corner, bent in the same configuration as the border wire, clipped thereto at the side, and run from this position, and be clipped to either the front wood rail or to the side wood rail. The easy-chair seat shall be provided with two end stabilizers installed in the same manner. Ten stabilizers shall be used in the davenport back and shall run from the center base-support crimp wire to the bottom edge of the border wire. The easy-chair back shall be provided with two stabilizers installed in the same manner. The davenport and easy-chair back stabilizers may be clipped into position or held in position by winding.

3.3.2.6 *Links.* Wire links shall be as specified in table I and shall be used to connect all intersections of lace wires at the outside top diameter of all coil springs with adjoining lace wires.

3.3.3 *Individual coil springs and spring units (class 2 furniture).*

3.3.3.1 *Springs for loose cushions.* The type of spring unit used shall conform to manufacturer's standard practice, except as specified hereinafter. Wire used shall be of the quality specified in tables III and IV, respectively. All springs shall be sewn

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

(Marshall type, see 3.3.3.1.2) or wired together and shall be zinc or cadmium coated, or enameled. Coil count for each cushion shall depend on design and size requirement, but shall contain as many springs as is practicable to be placed within the individual casing.

3.3.3.1.1 *Cushion springs (except Marshall unit type).* Seat cushions shall have springs of not less than 13-gage wire, 3 inches in diameter, 3½ inches high and border wire not less than 11-gage. Back cushions shall have springs of not less than 15-gage wire, 3 inches in diameter, 3 inches high, and border wire not less than 15-gage.

3.3.3.1.2 *Marshall-type cushion spring units.* Seat cushions shall have springs of not less than 15-gage for use with fabric casings, and not less than 13-gage for use with leather or artificial leather casings. The springs shall be 3 inches in diameter and 3½ inches high. Back cushions shall have springs of not less than 16-gage for use with fabric casings, and not less than 14-gage for use with leather or artificial leather casings. The springs shall be 3 inches in diameter and 3 inches high.

3.3.3.2 *Springs for seat bases and backs.* (See 3.4.2.2.3, 3.4.2.2.5, 3.4.2.3.2 and 3.4.2.3.4.)

3.3.4 *Frame materials (class 1 furniture).*

3.3.4.1 *Lumber.* Lumber used in the fabrication of all wood parts shall be dried without brashness, casehardening or honeycombing, to a moisture content of from 6 to 10 percent at time of assembly as determined in accordance with MIL-W-6110. The grade or grades of lumber shall be suitable for cutting and working into component parts of quality furniture specified herewith. The lumber shall be plain or quartersawn. Back posts of chair and davenport shall be bandsawn to utilize the maximum advantage of grain direction, or may be steam bent to provide maximum strength. All other components, after fabrication, shall have a slope (or divergence) of grain not to exceed 1 inch in 8 inches. All components shall be smoothly machined. Exposed wood parts shall be smoothly sanded and shall be sound and free from knots, machine marks, decay, wormholes, splits, shake, wane, or other defects which may affect serviceability or appearance. Unexposed wood parts shall be of the same quality as specified for exposed parts except that machine marks, wormholes, sound, tight knots not exceeding ¾ inch in diameter (providing no more than two knots occurring in any piece and which do not occur on an edge or at a point of interference with the construction), sapwood, and mineral streaks which will not affect serviceability or strength of the finished parts will be permitted. Exposed parts, except back posts on davenport and easy chair, shall be constructed of one piece of wood. Unexposed parts and the back posts on davenport and easy chair shall be constructed of either one piece of wood or from full-length glued stock.

3.3.4.1.1 *Exposed component parts.* Exposed component parts of the davenport and easy chair may be mixed, whereas all exposed component parts of the occasional arm chair shall be fabricated from any one of the following species of wood (except for stem-bent components):

Beech	Mahogany
Birch, Sweet or Yellow	Maple, Bigleaf
Cherry, Black	Maple, Hard or Soft
Hackberry	Pecan
Hickory	Sweetgum, Red or Sap
Magnolia	Walnut

3.3.4.1.2 *Unexposed component parts.* Unexposed component parts shall be fabricated from any of the woods specified in 3.3.4.1.1 and, in addition, any of the following:

Alder, Red*	Oak, Red or White
Ash, White	Sycamore
Elm, American	

* When used as main frame member, shall be increased in cross-section area by not less than 20 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.4.1.3 *Steam-bent solid wood components.* Steam-bent solid wood components shall be fabricated from any one of the following species of wood:

Ash, White	Hickory
Oak	Beech
Maple, Hard	Birch, Sweet or Yellow
Elm, Rock	
Elm, American	Pecan
Maple, Bigleaf	Walnut

3.3.4.2 *Dowels.* Dowels shall be of ash, hickory, maple, birch, beech, or oak. All dowels shall be spirally and longitudinally grooved. Dowels shall be dried to a moisture content not exceeding 5 percent at the time of assembly. The diameter of the dowels shall be as shown on Quartermaster Corps' Drawings 5-8-122, 5-8-123 and 5-8-124 (figs. 2, 3, and 4) for class 1 furniture, and as specified in 3.4.2.2.1 for class 2 furniture.

3.3.4.3 *Glides.* Glides shall be constructed of nickel or chrome-plated steel, or constructed of corrosion-resisting steel, and shall be nail type. Glides shall be of the size shown on Quartermaster Corps' Drawings 5-8-122, 5-8-123, and 5-8-124 (figs. 2, 3, and 4).

3.3.4.4 *Adhesive.* The adhesive used for assembly gluing of joints shall conform to either type I, grade J 2 or better, or type II of MMM-A-100; MMM-A-193 or MMM-A-188. Adhesive used for edge gluing or built-up stock shall conform to type I or II, class Z of MMM-A-188 or MMM-A-125.

3.3.4.5 *Lacquer.* Lacquer shall conform to type I or II of TT-L-57.

3.3.4.6 *Stain.* The stain shall conform to TT-S-720 except that in the fading test, a small color change will be permitted.

3.3.4.7 *Filler, wood.* The wood filler shall conform to TT-F-336.

3.3.4.8 *Sealer.* The sealer shall conform to TT-S-190.

3.3.4.9 *Washcoat.* At the option of the contractor, the washcoat shall conform to one of the following alternates:

3.3.4.9.1 Alternate "A" shall consist of shellac varnish, conforming to type I, grade B, body 1 of TT-V-91, thinned with 4 parts of denatured alcohol.

3.3.4.9.2 Alternate "B" shall consist of lacquer, conforming to TT-L-57, reduced for application to 5 to 8 percent solids.

3.3.4.9.3 Alternate "C" shall be a lacquer especially formulated for washcoat purposes, to be applied at 5 to 8 percent solids and to contain no zinc stearate or other sanding aid.

3.3.4.10 *Wax.* The wax shall conform to type I or II, P-W-158.

3.4 Construction and design.

3.4.1 *Class* 1. The construction of all components and assemblies of the class 1 furniture covered herein shall conform to the requirements of this specification and the design, details, dimensions and material classification and sizes thereof shown on Quartermaster Corps' Drawings 5-8-121, 5-8-122, 5-8-123 and 5-8-124 (figs. 1, 2, 3, and 4). Each davenport and easy chair shall be provided with two sets of slip covers as specified in 3.3.1.13.3.

3.4.1.1 *Wood frames.* All frames shall be constructed of wood specified in 3.3.4.1 and shall be in accordance with applicable Quartermaster Corps' Drawings 5-8-121, 5-8-122, 5-8-123 and 5-8-124 (figs. 1,2,3, and 4). All joints shall be carefully aligned and fitted together with glue specified in 3.3.4.4. Either blind or through dowling is permissible except in the construction of type III chair. Dowels shall be as specified in 3.3.4.2. Corner blocks shall be glued and accurately fitted into place and secured with screws as shown on applicable Quartermaster Corps' Drawings 5-8-122, 5-8-123, and 5-8-124 (figs. 2, 3 and 4) ex-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

cept where nailing of corner blocks is indicated. All joints shall be held in alignment for a sufficient time to allow the glue to set. Mortise and tenon joints may be used in lieu of dowels, providing the tenons are at least three-fourth of the width of the piece and at least 3/4 inch deep. Machine marks and scratches shall be removed by sanding. Glides shall be installed on all items of furniture after complete fabrication, prior to shipment.

3.4.1.2 *Tacking and stapling.* All tacking of burlap and upholstered padding material shall be done with 6-ounce tacks except for tacking burlap on backs of class 1, type III chairs, where 3-ounce tacks will be permitted in lieu of 6-ounce tacks or staples specified in 3.3.1.11. The spacing shall be not over 2 inches apart. Tacking of basic cover on davenport and easy chair shall be done with 3-ounce tacks or staples specified and spaced not over 1 inch apart. Tacking of cambric and tape shall be done with 3-ounce tacks or staples specified and spaced no more than 2 inches apart. The basic cover of the occasional arm chair shall be done with 3-ounce tacks specified and spaced not more than 2 inches apart.

3.4.1.3 *Machine seam and stitching.* Stitches seams and stitching types shall conform to Fed. Std. No. 751. Stitches per inch shall be 7 to 11. The stitch type shall be 301. Plain seams for davenport and easy-chair cushions, arms and seat platform, and welted-cord seams for the top boxing edge and the vertical boxing edge, extending therefrom to the top of the arm, shall be type SS a-1, using thread specified in 3.3.1.6.2. Welted-cord seam shall be made using cord specified in 3.3.1.7. Seam allowance shall be maintained and seams properly sewn so that no raw edges, run-offs, broken or skipped stitches, twists, pleats, or puckers result. Top and bottom threads shall be adjusted to fabrics with proper tension so there will be no looped stitches or puckering of fabric and no "cracking" when cover is stretched to fit the furniture. Welt seams for class 2 furniture shall be type SSK-1. Seams shall be type 301, with 7 to 11 stitches per inch.

3.4.1.4 *Upholstered bases.*

3.4.1.4.1 *Davenport and easy chair.* The applicable drop-in type wire spring unit specified in 3.3.2 shall be installed in the frame and covered with burlap specified in 3.3.1.1, which shall be doubled over and tacked to the frame on all four sides. The front spring edge with side return to arm stump shall be covered with either of the following:

(1) A machine-made jute core burlap covered rolled edging not less than 1¼ inches in diameter, hog-ringed around the border wire into place with rings not over 5 inches apart or securely sewn to the border wire with thread specified in 3.3.1.6.3 with stitches not over 2 inches apart.

(2) Covered with a 5-inch (minimum) layer-base insulator material specified in 3.3.1.10, except that the foam-rubber ply is not required in this instance, and hog-ringed around the border wire with rings not over 5 inches apart.

After the spring edge is prepared by method (1) or (2) above, the seat deck shall be formed by stitching the top cover specified in 3.3.1.13.1 to the burlap deck, 4 inches from the front spring edge, with stitches not over 1 inch apart, using thread specified in 3.3.1.6.3. The front edge shall be padded with a layer of base insulator material specified in 3.3.1.10 from the point 4 inches from the front down to the frame. The front corners shall be taped where fitted around the "dog ears" and the bottom edge shall be taped and tacked to the face side of the front rail and to the face side of the side rails from the corner to the arm stump. The top cover shall then be pulled down and tacked to the front and side rails. The cover material shall be blind tacked over strip cardboard to the front rail, with a return on each side to the arm stumps. This border shall be padded with a layer of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

cotton specified in 3.3.1.4 or a layer of homogeneous cellulose fiber felt at least ¼ inch thick, with a density not less than 2 pounds per cubic foot; the cover pulled down and tacked to underside of rails. The balance of the seat deck shall be formed by placing a layer of base insulator material specified in 3.3.1.10 over the balance of the seat deck. This insulator pad shall be one piece, extending from the stitched seam line, 4 inches from the front border wire, to a point 1 inch over the two side edges and the back edge of the border wire of the spring unit, and hog-ringed around the border wire with rings not over 5 inches apart. This portion of the deck shall then be covered with denim specified in 3.3.1.13.1, which shall be tacked to the side base rails and the back base rails of the frame, forming a platform independent of the back and arms. The insulated padding material for the front edge and the seat platform, if not of one piece, shall be joined with tape. The seat springs shall not be compressed during this construction. The entire under-construction, after completion of the back and ends, shall be covered on the bottom with cambric specified in 3.3.1.3, with the glazed side down, which shall be attached by tacking or stapling to all four rails.

3.4.1.4.2 *Occasional arm chair.* The applicable drop-in wire spring unit specified in 3.3.2 shall be installed in the frame and covered with burlap specified in 3.3.1.1, which shall be doubled over and tacked to the top of the frame on all four sides. All top edges of the covered spring unit, from the border wire to the top of frame, shall be padded with two layers of cotton specified in 3.3.1.4 to form smooth rounded contours as shown on Drawing 5-8-121. Upholstered padding material specified in 3.3.1.9 shall be applied. It shall be cut full size and the padding shall extend over the sides of all four rails to the gimp lines. It shall be tacked or stapled there with a maximum spacing of two inches between tacks or staples. Cloth-coated upholstery fabric specified in 3.3.1.13.2 shall be applied by tacking to the four seat rails. Gimp specified in 3.3.1.13.2 and the upholstery nails specified in 3.3.1.12 shall be applied. The bottom of the seat shall be covered with cambric specified in 3.3.1.3 with the glazed side down, which shall be attached by tacking or stapling to all four rails.

3.4.1.5 *Upholstered backs.*

3.4.1.5.1 *Davenport and easy chair.* The applicable drop-in wire spring unit specified in 3.3.2 shall be installed in the frame and covered with burlap specified in 3.3.1.1 which shall be doubled over and tacked to the top rail, center pull, back posts and arm wing blocks. Upholstered padding material specified in 3.3.1.9 shall be applied. The upholstery padding material shall be provided with continuous cloth-taped edging on all four sides. Where the extension of the cloth-taped edging is desired to reach the center pull, sewing of sheeting or other suitable material thereto is permitted. The upholstery padding material, except the bound-hair portion, shall extend over the top rail. The bound-hair portion of the padding shall terminate at the front edge of the top rail. The tape shall then be tacked to the back of the top rail. The upholstery padding material shall extend 1 inch below the bottom border wire, and the tape on the bottom edge shall extend to the center pull where it shall be tacked. The upholstery padding material shall extend from side to outside edge of the wing blocks and at a position below the top of the arm, 1 inch over the side border wire. The tape shall be pulled over the wing block and over the vertical arm tacking strip and tacked as indicated above. Where the extension of the tape is desired, the sewing of sheeting or other suitable material thereto is permitted. The denim cover specified in 3.3.1.13.1, shall be then applied as a final covering by tacking in place as follows: Top shall be tacked to the outside back of the top rail, bottom shall be tacked to the outside back of the center pull or top edge of the back rail. Sides above arm shall extend over the wing block and tacked to the back edges of the back post and, below

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

the arm the cover shall be pulled through and tacked to the back edge of the vertical arm tacking strip.

3.4.1.5.2 *Occasional arm chair.* Back construction of the occasional arm chair shall be as follows: The face side of the chair back panel shall be covered with one piece of sheet webbing specified in 3.3.1.2.1, doubled over and tacked on four edges. One layer of felted cotton specified in 3.3.1.4 shall be applied to the face side and the upholstery fabric specified in 3.3.1.13.2 shall then be applied. Gimp specified in 3.3.1.13.2 and the upholstery nails specified in 3.3.1.12 shall be applied as shown on Drawing 5-8-121.

3.4.1.6 *Upholstered arms.*

3.4.1.6.1 *Davenport and easy chair.* Arms shall be upholstered as follows: The inside arms shall be covered with a single piece of sheet webbing specified in 3.3.1.2.1, doubled over and tacked to the four inside edges of the arms, arm stump and the outside surface of the vertical arm tacking strip and the outside edge of the horizontal tacking strip. Upholstery padding material specified in 3.3.1.9 shall be tacked flush to the inside of the edges of the arm and extend to the horizontal arm tacking strip and to the vertical arm tacking strip and tacked into place. Foam-rubber slab stock specified in 3.3.1.8.1 shall be laid over the top of the arm and face of arm stump and bonded in place. The minimum thickness of the foam rubber shall be 1 inch on the arm and ½ inch on the arm stump. This padding shall extend over the inside padding material. The joint on the arm, and arm stump between the foam-rubber arm, and the side padding shall be covered with a continuous cloth-taped edging, cemented into place. The denim cover specified in 3.3.1.13.1 shall be applied as a final covering to the arm and inside arm by tacking to the outside edge of the arm and arm stump. This cover is then pulled down on the inside of the arm between the platform and the horizontal-arm tacking strip and tacked to the outside edge of same and pulled back and tacked to the vertical tacking strip in the same manner. The outside arm shall be covered with ten-ounce burlap specified in 3.3.1.1 and doubled over and tacked to the outside edge of arm stump, arm, side rail and back post. The outside of the arm shall then be covered with denim specified in 3.3.1.13.1 by tacking to the outside edge of the arm over a cardboard strip. Cover shall then be pulled tight and tacked to the underside of the side rail and to the outside edge of the back post. The vertical edge at arm stump shall be closed by either hand stitching, with stitches not over 1 inch apart, using thread specified in 3.3.1.6.3, or with a metal tacking strip having tack heads enclosed and not more than 1⅜ inches apart.

3.4.1.6.2 *Occasional arm chair.* Arms shall be upholstered as follows: Two layers of felted cotton specified in 3.3.1.4 shall be applied and the upholstery fabric specified in 3.3.1.13.2 shall then be tacked under arm. Upholstery nails specified in 3.3.1.12 shall then be applied in accordance with applicable Quartermaster Corps' Drawing 5-8-121 (fig. 1) with the exception that the horizontal row of nails on the inside of the arms shall be deleted.

3.4.1.7 *Outside back.*

3.4.1.7.1 *Davenport and easy chair.* The outside back of the davenport and easy chair shall be covered with burlap specified in 3.3.1.1, folded, doubled over and tacked. The burlap shall be tacked to the outside top edge of the top rail, the back edge of both back posts and to the face or underside of the base rail. This entire area shall be covered with denim specified in 3.3.1.13.1 in the following manner: The entire top edge of both the davenport and chair shall be secured by means of blind tacking over strip cardboard in the same manner as the front border. The bottom side of the outside back shall be tacked to the bottom side of the base rails. The outside ends shall be closed by either handstitching with stitches not over 1 inch apart using thread specified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.1.6.3, or with a metal tacking strip having tacks inclosed and not more than 1⅜ inches apart.

3.4.1.7.2 *Occasional arm chair.* The back of the back panel shall be filled flush with felted cotton specified in 3.3.1.4 and covered with the upholstery material specified in 3.3.1.13.2 by tacking on the four sides. Upholstery gimp specified in 3.3.1.13.2 and the nails specified in 3.3.1.12 shall be applied to the four sides of the back panel in accordance with Quartermaster Corps' Drawing 5-8-121 (fig. 1).

3.4.1.8 *Seat cushions.* The molded seat cushions for the davenport and easy chair shall finish a minimum of 5-1/8 inch thick of material specified in 3.3.1.8.2. Cushions have a 3⅝-inch boxing with a ¾-inch radius on edges. Seat cushions shall be of finished cushion sizes in accordance with upholstery allowances of Buyers Specification Latex Foam of the Rubber Manufacturers' Association, Inc. Cushions shall be reversible.

3.4.1.8.1 *Casings.* The casings for the seat cushions shall be of material specified in 3.3.1.13.1 and shall be provided with boxing 3½ inches, plus or minus 1/16 inch high.

3.4.1.8.2 *Sizes.* The finished size of davenport and easy chair cushions shall be 22 inches, plus or minus 1/8-inch overall depth. Width dimensions of chair cushions shall be such that a snug fit is provided between upholstered arms. Width dimensions of davenport seat cushions shall be such that a snug fit is provided for three cushions between the upholstered arms. The finished chair cushion and the end cushions of the davenport shall fit snug against the front of the upholstered arms with their outside edges flush with front and side edges of the chair and davenport. The width of the center cushion shall be approximately 2 inches greater than the width of each of the side cushions.

3.4.2 *Class 2 furniture.* Class 2 furniture covered by this specification shall be of commercial detailed design and shall meet the minimum requirements specified hereinafter. The general design and dimensions shall be as specified (see 6.2). The padding material and base insulator shall consist of rubberized curled hair with a topping of foam rubber or cotton as specified in 3.3.1.9 and 3.3.1.10. Upholstered items shall be provided with either a tight seat, or loose seat cushions of foam rubber or spring filled; backs shall be either padded, fixed spring type, or provided with loose cushions of foam rubber or spring filled, as specified.

3.4.2.1 *Class 2 (method A construction).* The upholstered items supplied under method A shall conform to the requirements for method B, except for spring units. Spring unit construction and method of upholstery padding shall conform to the requirements specified herein for class 1 furniture, except for the overall length and depth of the units. The spring units and upholstery covers shall be formed to fit the specific designs of frames selected.

3.4.2.2 *Class 2 (method B construction).* The upholstered items supplied under method B shall consist of frames, and individual coil springs assembled over sheet or strip webbing, with springs hand-tied eight ways. Unless otherwise specified, items are to be furnished with reversible, loose seat cushions. When items are so specified, they shall be furnished with reversible, loose back cushions in lieu of a fixed back cushion (see 3.4.2.2.7).

3.4.2.2.1 *Wood frames (class 2, method B).* The frame members shall be constructed of wood as specified in 3.3.4.1 and unless otherwise specified (see 6.2), shall be of a finished thickness of not less than 1- 1/16 inch. The frame members shall be joined by the use of dowels or mortise and tenon joints. Dowels shall be as specified in 3.3.4.2 and shall be not less than 7/16-inch diameter and not less than four times the diameter in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

length. When dowels are used, there shall be not less than one dowel in members up to and including 1¾ inches wide; two dowels shall be used in members in excess of 1¾ inches, and up to and including 2⅞ inches wide; members in excess of 2⅞ inches wide shall have not less than three dowels of the above diameter. Alternatively, two dowels not less than ½-inch diameter may be used in members up to 4½ inches wide. Dowels shall be uniformly spaced and shall be not closer to the edge of the member than one-half of the diameter of the dowel. Boring for dowels shall be of such size that the dowel shall be a snug fit, having a plus tolerance of not more than 1/64 inch. Mortise and tenon construction, where used, shall be as specified in 3.4.1.1. The corners of all seat frames shall be reinforced by diagonal corner braces within 3/8—1/2 inch less than the width of the frame to which the brace is secured. The brace shall be accurately fitted, glued, and secured by not less than two No. 8 screws in each end of the braces set at right angles to the frame members, and penetrating the frame not less than ⅝ inch. Arm posts shall be of one or more continuous pieces, and when forming the front or back legs shall be of the wood specified in 3.3.4.1.1 and shall be doweled and glued to the other frame members. When wood legs are to be applied after assembly, they shall be free from finish on the part to be secured by glue, and screwed to the seat frame. When legs are secured by using a rail bolt and T nut, the rail bolt shall be not less than ⅜-inch diameter and there shall be a steel washer between the end of the leg and the wood frame. The washer shall be not less than 1/16 inch thick and of a diameter equal (plus or minus ⅛ inch) to the greatest dimension of the leg where it joins the wood frame. When metal legs are used, they shall rest directly under the seat frame, extending up the inside of the rail not less than 3 inches and secured by two ¼-inch bolts. Frames shall have cross stretcher braces on back and seat. Frames 3 to 5 feet long shall have not less than one stretcher for each seat and back, over 5 feet and up to 7 feet; not less than two stretchers for each seat and back, over 7 feet long; not less than three stretchers for each seat and back, with the space between stretchers or stretchers and frame ends equally divided. The stretchers shall be designed and located in such a manner that they cannot be felt by a person sitting on finished items. Tacking strips shall be placed as necessary to assure secure fastening of upholstery covers. Framed ends forming arm supports and wing blocks shall be the same thickness as other frame members, assembled by dowels, glue and glue blocks, and two ¼-inch bolts or two dowels at each securing point. When end grain of a member is glued to the flat grain of a member (except corners which shall have braces or glue blocks), they shall have in addition to the dowels, a ¼-inch thick, 3-ply plywood reinforcement glued and nailed over the inside of the joint. The reinforcement shall be nearly as wide as the end grain member and shall overlap each piece at the joint approximately 2½ inches. All frame legs shall be equipped with glides in sizes as large as the legs will permit. Glides shall be constructed of nickel or chrome plated steel, or corrosion-resisting steel, and shall be nail type. When the use of 4/4 lumber in the fabrication of the frame members is permitted (see 6.2) for class 2, method A furniture, the finished thickness of the lumber shall be not less than 13/16 inch, and front-and back-seat base rails over 68 inches in length shall be reinforced with lumber strips not less than 2 inches wide and 13/16 inch thick. The strips shall extend to within 4 inches of each end of the rails and shall be securely glued and screwed, not more than 12 inches apart, to the inside of the rails.

3.4.2.2.2 *Webbed base for seat (class 2 method B).* Sheet or strip webbing as follows shall be used for seat of fully upholstered item: Strip webbing specified in 3.3.1.2.2 shall be tacked to the seat frames folded over and tacked again, stretched tight and tacked the same way. There shall be not less than seven 12-ounce tacks at

Source: https://assist.dla.mil -- Downloaded: 20261O-26T11:40Z
Check the source to verify that this is the currentversion before use.

each end of seat webbing or six 12-ounce tacks for each end of back webbing. Alternatively, at the option of the contractor, three 12-ounce tacks and two ⅞ by 13 spring-up nails shall be used. The webbing shall be closely interlaced and secured to cross-stretchers. Sheet webbing specified in 3.3.1.2.1 may be used for seat base; when used, it shall be reinforced between each row of springs below the webbing by spring-steel rods 0.140-inch diameter, or spring-steel bands not less than 1/16 inch thick and 5/8 inch wide suspended by helicals, or 24-ounce sheet webbing reinforced by braided wires secured to front and back rails. There shall be not less than two wire reinforcements between stretchers or stretcher and frame end of davenport, and between frame ends of chairs. Sheet webbing shall be secured with tacks or staples specified in 3.3.1.11 to one side and end of frame with tacks or staples approximately 2 inches apart, then the loose ends pulled taut and tacked or stapled. Webbing to be folded over and tacked again all the way around with tacks or staples spaced approximately 2 inches apart.

3.4.2.2.3 *Coil spring and insulated seat platform (class 2, method B).* Spring and border wire shall be of the quality spring steel specified in 3.3.2. Springs shall be hourglass shape of 8-gage wire for corners and 9-gage wire for the remainder of the seat. The coils shall be selected for height and top diameter to conform with design, seating comfort and uniformity, and shall be spaced to not more than 2 inches apart, consistent with number of rows of springs within a unit. Each spring shall be sewn and tied to strip webbing at not less than three places by twine specified in 3.3.1.5, or may be secured to sheet webbing by insulated clinch-type spring fasteners with points turned back into the webbing and with no points protruding. Border wire shall be 9-gage and shall follow the line of the piece and shall be secured to each edge coil by insulated spring edge clips. The top of each spring shall be hand tied in eight places with twine specified in 3.3.1.5, securely tacked with 16-ounce barbed tacks or, at the option of the contractor, ⅞ by 13 spring-up nails, and tied to the frame. The end of the twine shall be twisted around the tack, and back over the twine, to form a loop and prevent the edge of the tack from cutting the twine. The loose end of the twine beyond the loop shall be further secured to the frame or to the spring. Burlap specified in 3.3.1.1 shall be applied over the springs and securely tacked or stapled to the frame, with edges of burlap folded over and tacked or stapled again. The wire edge shall be secured to the burlap by triple-tied stitches, or wire rings not more than 6 inches between fastenings. All seat-deck spring edges shall have edge rolls as specified in 3.4.1.4.1. Following the application of the edge roll, the method of insulating and covering the seat-deck shall be as specified in 3.4.1.4.1, except for the covering material. The covering material shall be as specified (see 6.2), except cotton velour conforming to fabric number 11 of CCC-F-66, or drill cloth, or a rep material weighing not less than 16 ounces per 3¼ linear yards, 30-inch width basis, of a neutral color material may be used on the top of the deck, except where the cover is of leather or artificial leather, then velour only will be permitted. The velour, rep, or drill cloth shall not extend any closer than within 4 inches of the front edge of the top and shall be securely stitched to the specified cover material.

3.4.2.2.4 *Coil spring base for tight seat (class 2, method B).* The webbing, springs, tying, and burlap shall be as specified in 3.4.2.2.2 and 3.4.2.2.3. The method of upholstering and material shall be as specified in 3.4.1.4.2, except a foam-latex slab not less than 2 inches thick shall be used in lieu of the hair pad and rubber specified. The foam-latex pad shall be as specified in 3.3.1.8.1. The upholstery covers shall be as specified in 3.3.1.14. Seats shall be provided with proper pitch and crown to provide comfort. Buttons and tufting, if required,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

shall be as illustrated for the particular design selected.

3.4.2.2.5 *Upholstered spring backs (class 2, method B).* The requirements of 3.4.2.2.2 and 3.4.2.2.3 shall apply except as follows: Reinforcement of sheet webbing is not required. The springs and border wire shall be not less than 13-gage spring wire and the top of springs need only be tied in four places. Edge roll is not required. Upholstery padding shall be as specified and applied according to 3.4.1.5.1, except the bound hair portion of the padding material may terminate at the top border wire and shall be hog ringed thereto where a welt is required along the top of the back inside cover. Upholstery covers specified in 3.3.1.14 shall then be applied.

3.4.2.2.5.1 *Backs for loose cushions (method B).* Sheet webbing as specified in 3.3.1.2.1 shall be tacked or stapled as specified in 3.4.2.2.2 to the inside of the back frame and a layer of base insulator applied. The base insulator material shall be as specified in 3.3.1.10. The covers shall be applied as specified in 3.4.1.5.1, except the upholstery cover shall be as specified in 3.3.1.14.

3.4.2.2.5.2 *Padded backs.* Padded backs for types III and IV, method B chairs shall have sheet webbing as specified in 3.3.1.2.1 tacked or stapled as specified in 3.3.1.11 to the inside of back frame and a layer of padding material applied. The padding material shall be as specified in 3.3.1.9, except thickness shall be according to design requirements, but the hair pad shall be not less than ⅝ inch thick. Upholstery covers shall be as specified in 3.3.1.14.

3.4.2.2.6 *Upholstered arms and outside backs (class 2, method B).* Flat upholstered arms shall be constructed as specified in 3.4.1.6.1, except for arms 3 inches or less in width, ½ inch of foam rubber will be permitted on top of the arms. All other type arms shall be shaped to suit the design requirements with the material specified in 3.3.1.9, except thickness shall be according to design requirements, but the hair pad shall be not less than ⅝ inch thick. Outside arms and back covers, except on curved sections, shall be applied over burlap specified in 3.3.1.1. Covers on curved sections shall be applied over hardboard or other suitable material used in commercial practice to form an even or uniform curvature. Upholstery covers shall be as specified in 3.3.1.14.

3.4.2.2.7 *Loose cushions (class 2, method B).* The finished sizes of all cushions shall be such that they will completely cover the seat decks and back rests; provide a snug fit between upholstered arms and backs and between cushions when more than one is required. All outside edges of the seat cushions, when in place, shall be approximately flush with the front edge of the upholstered frame.

3.4.2.2.7.1 *Loose seat and loose back spring cushions (class 2, method B).* Unless otherwise specified (see 6.2), loose seat and back spring cushions shall contain springs conforming to the requirements specified in 3.3.3.1. All spring units, except Marshall unit type, shall be encased in burlap specified in 3.3.1.1. Marshall unit individual coil springs shall be encased in pockets of muslin. The top and bottom of all spring units shall be completeley covered with upholstery padding specified in 3.3.1.9, except the minimum thickness of the bound hair shall be ⅝ inch and the foam rubber may be substituted by a layer of cotton felt specified in 3.3.1.4. The boxing of all spring filled cushions shall contain a layer of the cotton felt. All cushions shall be completely made in muslin conforming to 3.3.1.14.1.

3.4.2.2.7.2 *Loose seat and loose back, molded foam rubber cushions (class 2, method B).* Unless otherwise specified in the invitation for bids (see 6.2) loose, molded foam-rubber cushions shall conform to the requirements specified in 3.4.1.8, except back cushions for furniture types I, II, V, and VI, and all cushions for types III and IV shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

finish a minimum of 4½ inches thick, with boxing a minimum of 3 inches. The cushions shall have a radius of approximately ¾ inch on all edges.

3.4.2.2.7.2.1 *Pin-core foam-rubber cushions.* When specified in the invitation for bids (see 6.2), the loose pin-core foam rubber cushions shall conform to the requirements of 3.3.1.8.3.1 for flat cushions or 3.3.1.8.3.2 for crowned cushions.

3.4.2.2.7.3 *Casings (class 2, method B).* Each cushion, except those covered with artificial or genuine leather, shall be reversible and its cover applied over the cotton or molded foam latex in a smooth and carefully tailored manner, having welted edges of the same material as the covers. All seams shall be firmly and neatly closed and welt lines shall be true and uniform. Cushions covered with artificial or genuine leather shall be the same as above, except that the underside of the cushion shall have a 4-inch facing of the specified cover and the remainder shall be covered with cotton velour of the approximate color of the cover. The velour used as part of the cushion cover shall conform to fabric number 11 of CCC-F-66. All casings covering molded foam-latex cushions shall be removable by the use of slide fasteners (zippers) in the gussets. Slide fasteners may be used in the gusset of outer casings for all other cushions at the contractor's discretion. Slide fasteners, when used, shall be type I, style 1, fastener, interlocking, non-separating, pin or cam lock, staple top stop, staple bottom stop, single slider with short tab pull, conforming to size M of V-F-106. All metal components of the fastener shall be fabricated of brass, or aluminum natural finish. Color of the tape shall be neutral, to harmonize with basic material. The boxing for casings on flat cushions shall be not less than ⅛ inch less in width than the thickness of the pin-core foam rubber used in the casing. This is applicable only to casings when flat pin-core foam rubber is used.

3.4.2.3 *Class 2, method C construction.* The method C construction upholstered items shall have sinuous-type springs with removable seat cushions, and fixed back cushions or removable back cushions according to design requirements.

3.4.2.3.1 *Wood frames (class 2, method C).* The frame shall conform to the requirements of 3.4.2.2.1, except the seat frame shall be reinforced by strips not less than 2 inches wide and 13/16 inch thick of any wood specified in 3.3.4.1. The strips shall be securely glued and screwed, not more than 12 inches apart, to the inside of the seat frame rails to which the spring clips are attached.

3.4.2.3.2 *Seat base (class 2, method C).* At the option of the contractor, the seat base for class 2, method C construction shall be either sinuous-type or flat spring steel as specified herinafter.

3.4.2.3.2.1 *Springs, sinuous type, seat base (class 2, method C).* The sinuous springs shall be of the one-piece spring edge type, formed from not less than 9-gage spring wire of the quality specified in table V. Sinuous-type springs shall be of such length as recommended by the spring manufacturer for the purpose intended. The springs shall be not less than 2 inches or more than 3½ inches wide, with either curved or square loops. Springs, except for types III and IV chairs, shall be of the spring-edge type, having V-shaped ends that will give a spring-edge action when installed. Installation of the springs to the seat frame shall be either (1) by insulated metal clips with not less than two drive screws not less than 1 inch long, or three barbed cement-coated nails, 1½ inches long, in each clip; (2) by the use of a steel strip not less than 0.045 inch thick, with one edge of the strip rolled over the end loop of each spring to securely anchor it in place; steel strips with edges rolled over shall be not less than 1⅛ inches wide and fastened to the wood frame with No. 8 wood drive screws, not less than 1 inch long, placed not less than ½ inch from each

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

end of the strip and not more than 2¼ inches apart, or (3) by inserting the ends of the springs a minimum length of ½ inch into holes drilled in the top of the base frame for this purpose and securing the spring at each end with not less than two staples having legs not less than ¾ inch long. Springs shall be installed no more than 2½ inches apart. After the required number of springs are installed in each unit, the top outside edge at the V-shaped ends of each spring shall be attached to a border wire with insulated metal clips not less than ⅞ inch long. Outside edges of each of the two end springs shall also be attached to the border wire with not less than three insulated metal clips not less than ⅞ inch long, spaced equal distance to the length of the top of the spring. The border wire shall be not less than 9-gage conforming to table IV. The ends of the border wire shall be joined either by butt-welding or by the use of a 20-gage tube not less than 2 inches long and securely crimped in place. All springs, border wire, and slips shall be given a dip coating of enamel and baked or shall be zinc or cadmium plated. In lieu of the above, springs may be completely coated with *Perma-lastic* (latex compound) or equivalent. The tops of all springs shall be joined together, side by side, by not less than two rows of helical springs. Twine or links will not be permitted for joining the springs.

3.4.2.3.2.1.1 *Sinuous-type spring, tight seat (class 2, method C).* The sinuous-type springs shall be as specified in 3.4.2.3.2.1 except V-shaped ends are not required; padding and upholstering shall be as specified in 3.4.2.2.4, except that only a foam rubber pad may be used.

3.4.2.3.2.2 *Flat spring-steel seat base.* The components of each chair-seat base unit shall consist of not less than the following: 2 hanger bars, 2 frame irons, 20 C-shaped leaf springs, 5 arch supports, 10 cross bars, 5 front extensions, 7 clips for securing the border wire, 1 band for securing the cross bars from side to side, 3 clamps for securing the band to the cross bars, 2 stabilizers, edge wire, and sufficient rivets for assembly. The above quantities are for one chair-seat spring base, and shall be increased accordingly for multiple seating units. The seat base unit shall be firmly constructed and securely fastened to the wood chair frame through the hanger bars.

3.4.2.3.2.2.1 *Hanger bars and frame irons.* The hanger bars and frame irons shall be re-rolled 0.30—0.40 percent carbon-steel channels not less than 1 inch wide, with leg height of not less than ⅜ inch, having a nominal wall thickness of 0.1094 inch. The hanger bars shall be offset to give depth to the unit and shall run from front to back, and shall be secured to the frame by wood screws. The frame irons shall run transversely (from side to side) and are secured to the hanger bars by four, ¼ inch diameter semi-tubular steel rivets.

3.4.2.3.2.2.2 *C-shaped leaf spring and arch supports.* The C-shaped leaf spring and arch supports shall be tempered spring steel, 0.68—0.80 percent carbon, 0.60—0.90 percent manganese, having a hardness of Rockwell 15-N-84 to 15-N-86. The C-shaped leaf springs shall be not less than 2 inches wide and shall have a nominal thickness range of 0.018 to 0.030 inch, to maintain seating comfort, and shall be formed to a radius of approximately 2½ inches. Two C-shaped leaf springs shall be installed at each location. The leaves shall be secured to the front and back frame irons by not less than two No. 8 solid steel rivets for each double leaf spring. The arch supports shall be formed to fit the C-shaped leaf springs and shall be approximately 2 inches long. The arch supports shall be riveted between the C-shaped leaf spring and the front frame iron.

3.4.2.3.2.2.3 Crossbars and extension leaf shall be tempered spring steel, 0.60 to 0.70 percent carbon, 0.40 to 0.60 percent manganese, having a hardness of Rockwell 44C to 46C. The crossbars shall be not less

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

than 19/32 inch wide and shall have a nominal thickness of 0.060 inch. There shall be not less than two crossbars for each pair of C-shaped leaf springs. The crossbars shall run from back to front, extending forward of the front C-shaped leaf spring to carry the platform forward to the front of the seat frame. Each crossbar shall be secured to the top of the front and back C-shaped leaf springs by not less than one No. 8 solid steel rivet at each joint. The extended part of the crossbars shall be riveted to a leaf spring extension, which is slightly curved upward to support the border wire by a border wire clamp. The extension-leaf spring shall have a nominal thickness of 0.030 inch and shall be not less than 2 inches wide by approximately 3 inches long.

3.4.2.3.2.2.4 *Connecting band.* The connecting band shall be of the quality of steel specified in 3.4.2.3.2.2.3 and not less than ¾ inches wide and nominal thickness of 0.025 inch. The crossband shall run from side to side and shall be located approximately 6 inches in front of the back row of C-shaped leaf springs. The connecting band shall be riveted to the outside pairs of crossbars and shall be securely fastened to all intermediate pairs of crossbars with clips.

3.4.2.3.2.2.5 *Stabilizers.* The stabilizers shall be the same quality and dimensions specified in 3.4.2.3.2.2.3 for crossbars. They shall run diagonally from the hanger bar, in front of the rear frame iron to the top of the front C-shaped leaf springs and shall be riveted at each end. There shall be two stabilizers for each seat unit and they shall be used to limit the forward and transverse movement of the spring unit.

3.4.2.3.2.2.6 *Clips.* The clips shall be cold rolled 1010 strip steel having a nominal thickness of 0.049 inch and shall be formed to secure the connecting band to the crossbars, and the border wire clamp shall be riveted to the extension leaf.

3.4.2.3.2.2.7 *Border wire.* The border wire shall be hard-drawn spring wire, nominal diameter of 3/16 inch and shall have a tensile strength of not less than 160,000 p.s.i. The border wire shall extend all the way across the front and not less than one-third of the way back along each side. It shall be held in place with not less than seven border clamps, with at least five in the front and one on each side.

3.4.2.3.2.2.8 *Finish.* The entire unit shall be treated to resist rust by cadmium or zinc plating, or by painting or enameling.

3.4.2.3.3 *Upholstery of seat base.* The above seat bases shall be covered with burlap, having an edge roll upholstery padding and covers as specified in 3.4.2.2.3.

3.4.2.3.4 *Upholstered back rests (class 2, method C).* The general requirements of spring construction specified in 3.4.2.3.2.1 shall apply, except as follows:

(a) The springs, except for types III and IV chairs, shall have the spring edge on top only and springs shall be of wire not less than 12-gage, with the border wire not less than 12-gage. Border wire will not be required on types III and IV chairs.

(b) The springs shall be joined together, from side to side, with not less than two rows of helical springs, or may be tied together with two rows of twine for tying top of coil springs specified in 3.3.1.5, securely knotted at each spring. The border wire shall completely border the springs, except at bottom, and shall be securely fastened to the bottom back rail. The burlap, upholstery padding, and cover of the back rest shall conform to the requirements specified in 3.4.2.2.5.

3.4.2.3.4.1 *Backs for loose cushions (method C).* Backs for loose cushions on method C furniture shall be as specified in 3.4.2.2.5.1.

3.4.2.3.4.2 *Padded backs (types III and IV, method C).* Padded backs for type III and type IV, method C chairs shall be as specified in 3.4.2.2.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.4.2.3.5 *Upholstered arms and outside back cover (class 2, method C).* Upholstery of the arms and outside back cover shall conform to the requirements of 3.4.2.2.6.

3.4.2.3.6 *Loose cushions (class 2, method C).* The finished sizes of the cushions shall conform to the requirements specified in 3.4.2.2.7.

3.4.2.3.6.1 *Loose seat molded foam rubber cushion (class 2, method C).* The cushions shall conform to the requirements of 3.4.2.2.7.2, or 3.4.2.2.7.2.1 as specified in the invitation for bids.

3.4.2.3.6.2 *Casings (class 2, method C).* Cushion casings for class 2, method C furniture shall conform to the requirements of 3.4.2.2.7.3.

3.5 Finish.

3.5.1 *Class 1.*

3.5.1.1 *Finish on exposed wood surfaces.* Type III chairs shall not be packaged or packed until the requirements of 4.4.1.1 print test have been successfully passed.

3.5.1.1.1 *Color and appearance.* All exposed parts of the furniture, when the piece is in the position of normal use, shall be uniform in appearance and shall correspond to the degree specified in 3.5.1.1.2 and 3.5.1.1.3.4 to the standard reference panel.

3.5.1.1.2 *Davenport and easy chair legs.* Prior to finishing, exposed surfaces shall have been thoroughly sanded smooth with a 5/0 or finer sandpaper and thoroughly cleaned. Stain shall be applied. If open-grained woods are used, wood filler shall be applied. A finish coat of lacquer shall be applied. Final color shall approximate that of the standard color-texture-gloss reference panel.

3.5.1.1.3 *Occasional arm chair.* Prior to finishing, exposed surfaces shall be thoroughly sanded smooth with a 5/0 or finer sandpaper. Glue size may be used before the sanding in order to stiffen the wood fibers. Surfaces shall be thoroughly cleaned before application of stain.

3.5.1.1.3.1 *Stain.* The stain specified in 3.3.4.6 shall be applied to all exposed surfaces and allowed to dry not less than 30 minutes. Light-colored parts of the piece shall be stained to a uniform color which corresponds to the surrounding surface by the use of sap stain as necessary.

3.5.1.1.3.2 *Washcoat and filler.* Exposed surfaces of open-grain woods shall be given a washcoat specified in 3.3.4.9. After washcoat has air-dried for not less than 30 minutes, the surfaces shall be lightly rubbed with 5/0 or finer sandpaper and all loose particles and dust removed. Wood filler specified in 3.3.4.7 shall then be applied and worked into the pores by any means so that all pores are completely filled. Excess filler shall be removed and wiped clean. Filler shall be thoroughly dry before application of sealer.

3.5.1.1.3.3 *Sealer.* A coat of sealer specified in 3.3.4.8 shall then be applied to all exposed surfaces. After the sealer has dried for not less than one hour, all sealed surfaces shall be sanded with 5/0 or finer (dry) sandpaper and all surfaces wiped clean.

3.5.1.1.3.4 *Lacquer.* A coat of lacquer specified in 3.3.4.5 shall be applied cold or hot, depending on whether type I or type II lacquer is used, to all exposed surfaces and allowed to dry thoroughly. A second coat of the same lacquer shall be applied over the first and allowed to dry thoroughly. A suitable forced drying schedule will be permitted in all above steps of the finish, provided performance requirements of the finish can be met. The surfaces shall be rubbed to a uniform finish like that of the referenced panel (see 6.4). Care shall be exercised not to cut through the finish on high spots.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.5.1.1.3.5 *Finish resistance.* All surfaces which have been rubbed as specified in 3.5.1.1.3.4 shall have resistance as specified in 3.5.1.1.3.5.1 through 3.5.1.1.3.5.3.

3.5.1.1.3.5.1 *Print resistance.* When tested as specified in 4.4.1.1, the finish shall show no print or indentation.

3.5.1.1.3.5.2 *Cold check resistance.* When tested as specified in 4.4.1.2, the finish shall not check.

3.5.1.1.3.5.3 *Spot resistance.* When tested as specified in 4.4.1.3, the finish shall show no permanent spotting. Spotting which can be removed with a clean damp cloth, or softening which hardens within 1 hour will be acceptable.

3.5.1.1.3.6 *Wax.* The rubbed surfaces shall be given a coat of wax as specified in 3.3.4.10, and polished. The final color shall match that of the standard color-texture-gloss reference panel.

3.5.2 *Class* 2. The finish on exposed wood surfaces of class 2 items shall conform to the requirements for class 1 items as specified in 3.5.1 through 3.5.1.1.3.6, except that the color shall be as specified (see 6.2).

3.6 Labels.

3.6.1 *Class* 1. Each item shall have a label attached to the bottom of the item to conform to the legal requirements of the state in which the item is manufactured.

3.6.1.1 Each davenport and easy chair shall have a label of the material specified in 3.3.1.15. The label shall be attached to the seat platform under the center cushion in the same manner as specified in 3.6.1.2. The label shall contain the following information:

> **CAUTION:** Do not use any mineral spirits, solvents, (lighter fluid naphtha, benzene, et cetera), carbon tetrachloride, or strong chlorine solutions. Avoid prolonged exposure to sunlight when covering of the foam rubber cushion is removed.

3.6.1.2 *Instruction label for slipcover.* A label providing instructions for the use of slipcovers shall be sewn securely (stitched on all four sides) to the center of the davenport, under center cushion, and under the easy chair platform. The label shall be as specified in 3.3.1.15 and shall measure at least 3 by 4 inches and contain the following information:

> The washable slipcover supplied with this piece of furniture is a necessary part of the furniture, and must be used at all times. The separate pieces provide easy and sanitary maintenance and permit interchange for summer and winter.

3.6.2 *Class* 2. Each item of furniture shall have a label attached to conform to the legal requirements of the state in which the item is manufactured.

3.7 Marking for identification.

3.7.1 *Class* 1. The following information shall be stenciled or printed on the cambric under cover of each class 1 item with ink conforming to the laundering and dry cleaning requirements of TT-I-542, except color shall be white. The letters "U.S.", nomenclature, stock number, specification number, contractor's name or trademark, the contract number and year of manufacture shall be in conformance with the requirements of MIL-STD-130.

3.7.2 *Class* 2. Class 2 items shall be marked as specified (see 6.2).

3.8 Workmanship. The finished article shall be clean, well made and free from any defect which may affect appearance and serviceability. All upholstered covers shall be smoothly and evenly applied and carefully tailored. Seams shall be properly aligned and thoroughly stitched. Covers shall be carefully matched as to pattern and weave of fabric.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order (see 6.2). The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 The quality assurance provisions contained herein are intended for class 1 furniture, however, unless otherwise specified (see 6.2), they shall apply to class 2 furniture wherever applicable.

4.3 Sampling for inspection and acceptance. Sampling and inspection shall be performed in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 *Inspection of materials and components.* In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used were manufactured, tested, and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.3.2 *Intermediate inspection.* The defects found during examination shall be classified in accordance with 4.3.2.1, 4.3.2.1.1, 4.3.2.1.2 and 4.3.2.1.2.1.

4.3.2.1 *Examination of frames for visual characteristics.* The sample unit for these examinations shall be a davenport, easy chair, or occasional arm chair frame assembly, as applicable. Examination of frames for defects in material, construction, and workmanship:

Examine	*Defect*	*Classification*	
		Major	*Minor*
Wood material	Species of wood in any wood component not as specified.		X
	Decay over 1/4 square inch in area in any component.	X	
	Decay up to and including 1/4 square inch in area in more than one component.		X
	Bark pocket over 1 inch long.		X
	Bark or wane over 1 square inch in area. .		X
	Split, shake, or check over 2 inches in length.	X	
	Split, shake, or check up to and including 2 inches in length which may affect serviceability.		X
	Loosened grain, torn grain or chip-out which may affect serviceability.		X
	Area over 4 square inches not smoothly surfaced.		X
	Honeycomb.	X	
	Decayed or loose knot over 1 inch average diameter.	X	
	Decayed or loose knot up to and including 1 inch average diameter.		X
	Sound tight knot on edge of piece of wood or at a construction point.	X	
	Sound tight knot over 3/4 inch average diameter.		X
	More than two sound tight knots in one piece of wood.		X
	Glue line opening in edge glued or built-up stock over 1 inch in length.		X
	Sapwood or mineral streak which may affect serviceability or strength.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Wood material (Cont'd.)	More than two wormholes in component that will be unexposed after upholstery attachment.		X
	Wormhole in surface that will be exposed to view after upholstery attachment.		X
	Undesirable wood defect filled in with plastic wood or other filling compound.		X
Construction and workmanship	Wood component missing.	X	
	Loose or unsound joint.	X	
	Joint open more than 1/32 inch or 60 percent around its perimeter.	X	
	Evidence that glue at joint or block has not been applied where required.		X
	Frame not constructed as specified.	X	
	Center leg on davenport not attached as specified.		X
	Back post not fabricated as specified.	X	
	Evidence that joint is not type specified.		X
	Frame out of square, i.e., sprung.	X	
	Two or more screws, bolts or nuts missing.	X	
	Screw, bolt, nut, or washer missing where required.		X
	More than one screw loose or not driven in all the way.		X
	Nail, when applicable, missing.		X
	Screw point or nail point protrudes from the wood surface		X
	Corner block or glue block not accurately fitted into place.		X
Construction and workmanship of wood frame	Wood member improperly positioned or not positioned as specified.		X
	Wood member warped, cupped, or twisted out of specified shape.		X
	Shape or contour of wood member not as specified.		X
	Wood not full length piece where required.		X
	Dowel not inserted to depth required.*		X
	Dowel missing.		X
	Evidence that the diameter of dowel is less than specified.*		X

* Applicable to open dowel construction, when permitted.

4.3.2.1.1 *Examination of the wood frame for dimensions.* Any dimensions that are not within the specified tolerance shall be classified as defects.

4.3.2.1.2 *Examination of drop-in spring units for visual characteristics.* The sample unit for these examinations shall be one each type (back and seat) of drop-in spring units for the davenport, easy chair, or occasional arm chair, as applicable. Examination of each type of drop-in spring units for defects in finish, material, construction, and workmanship:

Examine	Defect	Classification	
		Major	Minor
Finish of drop-in spring	Wrong type finish.		X
	Not baked on finish.		X
	Brittle or flakes from wire.		X
	Bare spots not touched up and clearly noticeable on more than 10 percent of the components comprising a spring unit.		X
	Evidence of corrosion.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Drop-in spring material	Component broken. ...	X	
	Malformed or bent out of required shape to an extent which may affect serviceability. .		X
	Component damaged or cracked.		X
Construction and workmanship	Construction not as specified.	X	
	Total number of springs not as specified.	X	
	Spacing of springs not as specified.		X
	Any component missing.	X	
	Component not in location specified.		X
	Component not attached or installed as specified.		X
	Component detached where permanent attachment is required. .	X	
	Component loose where secureness is required.		X
	Single cone spring not knotted on one end. ..		X
	Double cone spring not knotted at both ends.		X
	Any spring not wound to the base support crimp wires at their intersection.		X
	Top of spring on outside edge of unit not attached to the border wire as specified. ...		X
	Corner spring not attached to the border wire with two clips. .		X
	Top crimp or lace wire not wound around the border wire in a manner that the wire end is pointed downward and falls inside the border wire.		X

4.3.2.1.2.1 *Examination of drop-in spring units for dimensions and number of turns in each spring.* Any dimension or number of turns that is not within the specified tolerance shall be classified as a defect.

4.3.2.2 *Inspection levels and AQL's.* The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection level	AQL's	
		Major	Total
4.3.2.1	II	2.5	6.5
4.3.2.1.1	L 4	(one class)	4.0
4.3.2.1.2	L 8	2.5	6.5
4.3.2.1.2.1	L 4	(one class)	4.0

4.3.3 *Inspection of the end item.*

4.3.3.1 *Visual examination.* The defects found during examination shall be classified in accordance with 4.3.3.1.1, 4.3.3.1.1.1, and 4.3.3.2.

4.3.3.1.1 *Examination for visual characteristics.* The sample unit for this examination shall be one davenport, easy chair, or occasional chair, as applicable. Examination of davenport, easy chair, or occasional arm chair for defects in material, construction, finish, and workmanship:

Examine	Defect	Classification	
		Major	Minor
Upholstery material	Color of material not as specified.		X
	Torn, cut, or contains hole.	X	
	Misweave, i.e., multiple float or other fabric damage affecting serviceability.	X	
	Material has objectionable odor.		X
	Cambric not glazed on exposed side.		X
	Spotted, stained or dirty.*		X
	Shade variations or faded affecting appearance.		X
	Coating of material peeled or blistered.* .		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	Minor
Upholstery material (Cont'd.)	Coating of material scratched or scuffed affecting appearance.		X
Upholstery workmanship	Seam open over 2 inches in length.	X	
	Seam open up to and including 2 inches in length.		X
	Seam uneven or not neatly accomplished affecting appearance.		X
	Seam in wrong location.		X
	Stitches per inch not as specified (check carefully).		X
	Needle chews.		X
	Stitch not type specified.		X
	Broken stitches not resulting in an open seam which may affect serviceability.		X
	Skipped stitches or runoffs.		X
	Raw edge noticeable at seam.		X
	Tucking of material at corner or fold not neatly accomplished affecting appearance.		X
	Color or upholstery thread does not match color of upholstery fabric as specified.		X
	Width of casing of cushion not as specified		X
	Covering wrinkled or puckered at seam to an extent adversely affecting appearance.		X
	Material pieced where a continuous piece of material is required.		X
	Cambric not neatly attached.		X
	Upholstery nails on occasional arm chair misaligned or uneven to an extent affecting appearance.		X
Upholstery workmanship (cont'd.)	Upholstery nails on occasional arm chair not set head to head as required.		X
	Head of upholstery nail on occasional arm chair malformed or cocked affecting appearance.		X
	Upholstery nail on occasional arm chair loose, i.e., can be removed with fingers.		X
	Occasional arm chair upholstery nail wrong type.	X	
	Variance in color or finish of upholstery nails on occasional arm chair affecting appearance.		X
	Gimp not neatly applied where required.*		X
	Gimp uneven affecting appearance.		X
	Welt missing where required.		X
	Welt loose along edges affecting serviceability.		X
	General design or styling not as specified or not as on approved sample	X	
	Contour of cushion, arm, or back irregular affecting appearance.		X
	Cushion missing.	X	
	No snug fit of chair cushion between the upholstered arms.		X
	No snug fit of the three cushions between the upholstered arms.		X
	Evidence of omission of padding.		X
	Furrow, lump, or bulge affecting appearance.		X
	Any tack that can be felt through the upholstery.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification: Major	Classification: Minor
Upholstery workmanship (Cont'd.)	Wrong type upholstery tacks on occasional arm chair.		X
	Spacing of tacks in cambric not as specified.		X
Construction and workmanship of wood frame	Legs uneven; i.e., end item rocks more than 1/16 inch when placed on flat surface.		X
	Any leg split.	X	
	Glide missing.	X	
	Glide improperly positioned, i.e., any portion of periphery of glide protruding beyond edge of wood or chamfer.		X
	Glide not type or material specified.		X
	Glide wrong size.		X
	Shape of leg not as specified.		X
Finish of exposed wood members	Wrong type finish, color not as specified, or does not harmonize with standard color-texture-gloss panel.	X	
	Unfinished wood visible when viewing item in normal use position.		X
	Peeling or blistered.		X
	Sag, run, or wrinkled affecting appearance.		X
	Foreign matter imbedded in finish affecting appearance.		X
	Cracked or checked affecting appearance.		X
	Area of no film.		X
	Tacky, i.e., not completely dry.		X
	Scratch, bruise, or mar affecting appearance.		X
	Light or dark colored areas, affecting appearance.		X
	Discoloration or stain affecting appearance.		X
	Touch up not neat affecting appearance.*		X
Finish of exposed wood members (Cont'd.)	Orange peel affecting appearance.*		X
	Not waxed.*		X
	Excess glue not removed affecting appearance.*		X
	Not polished.*		X
	All exposed wood parts of occasional arm chair not same species of wood.		X
	Machine mark affecting appearance.		X
	Wood chipped or splintered.		X
	Any loose or unsound joint.	X	
	Joint open more than 1/32 inch or 60 percent around its perimeter.		X
	Wood member malformed.		X
Identification marking, caution label and instruction label	Missing, incorrect or illegible.		X
	Size of lettering not as specified.		X
	Incomplete.		X
	Color of marking not as specified.		X
	Label not in location specified.		X

* Not applicable to davenport or easy chair.

4.3.3.1.1.1 *Examination of the davenport, easy chair, or occasional arm chair, as applicable for dimensions.* Any dimensions that are not within the specified tolerance shall be classified as defects.

4.3.3.2 Inspection levels and AQL's shall be as follows:

For examination in	Inspection level	AQL's: Major	AQL's: Total
4.3.3.1.1	II	2.5	6.5
4.3.3.1.1.1	L 4	(one class)	4.0

4.3.3.3 *Testing of the end product.* Testing of the occasional arm chair shall be per-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

formed in accordance with table VI for the characteristics shown therein. The sample unit shall be one occasional arm chair. The AQL shall be 4.0 defects per hundred units for each test characteristic. The inspection level shall be L 4 of MIL-STD-105. The test requirements are applicable to the individual unit.

TABLE VI. *Testing of the end product*

Test	Requirement	Test Procedure
Print	3.5.1.1.3.5.1	4.4.1.1
Spot resistance ..	3.5.1.1.3.5.3	4.4.1.3

4.3.4 *Examination of preparation for delivery.* An examination will be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects will be scored as specified below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be L 4 and the acceptable quality level shall be 4.0 defects per hundred units.

Examine	*Defect*
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size; location, sequence, or method of application.
Materials	Component missing, damaged, or otherwise defective.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling; bulging or distortion of containers; blocking, bracing and cushioning inadequate or missing.

4.4 Tests.

4.4.1 *Finish tests.* Finishes, prior to testing, shall be thoroughly cleaned of all rubbing oil or compound with xylol or mineral spirits. Test surfaces may be allowed to age 24 hours or more before conducting test specified in 4.4.1.3.

4.4.1.1 *Print test.* The finish shall not print when tested in conformance with method 6211 of Fed. Test Method Std. No. 141. This test shall be made not less than 4 hours after rubbing the finish and prior to waxing. A pressure of 1 p.s.i. shall be applied for a minimum of 4 hours. The finish shall then be examined to determine compliance with 3.5.1.1.3.5.1.

4.4.1.2 *Cold check resistance.* The edge of the test piece shall be thoroughly sealed with a heavy brushed coat of flexible lacquer or any suitable sealer. The test shall start not less than 5 days after the test piece has been rubbed. The test piece shall be subjected to 10 cycles. Each cycle shall consist of exposure at 120°F. plus or minus 5°F., for one hour, then, within one minute, exposure at 5°F., plus or minus 2°F., for one hour, and finally after a relaxation period of 15 minutes at room temperature an examination period of not more than 15 minutes. The test piece shall be examined to determine compliance with 3.5.1.1.3.5.2.

4.4.1.3 *Spot-resistance test.* One pool of 3 cc. of 50 percent pure ethyl alcohol shall be placed on the finish and covered with a small watchglass over which a larger watchglass is superimposed. Tape shall be placed around the contact surface of the large watchglass and finish to form an air tight enclosure. After 18 hours, the alcohol shall be removed by clear water and the finish cleaned with a clean cloth. After 1 hour, the finish shall be examined to determine compliance with 3.5.1.1.3.5.3.

4.4.2 *Breaking strength of twine and cord, welting.* Breaking strength of twine and welting cord shall be determined by method 4102 of CCC-T-191.

4.4.3 *Breaking strength of strip webbing.* Breaking strength of strip webbing shall be determined by method 5100 of CCC-T-191.

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

for definitions and application of the various levels of packaging and packing for civilian procurement.)

5.1 **Packaging.** Packaging shall be levels A or C as specified (see 6.2).

5.1.1 *Level A.*

5.1.1.1 *Class 1 furniture items.*

5.1.1.1.1 *Slipcovers.* Slipcovers shall be packaged in accordance with the level A requirements of DDD-S-420.

5.1.1.1.2 *Finished surfaces.* All finished surfaces shall be protected from abrasion with a covering or wrapping of machine-glazed or highly calendered kraft paper or waxed paper having a minimum basis weight of 30 pounds per ream (24 by 36-500) and covered with cushioned material. Cushioning material shall be fabricated in the form of pads or blankets and may be any one of the following materials or combination of these materials to provide built-up cushioning of not less than ¾-inch thick:

Macerated paper, plain
Macerated paper, cellulose faced
Shredded paper
Wood wool
Wood fiber felt
Cellulose wadding
Excelsior (sealed ends)
Cotton wadding
Molded pulpboard
Laminated cellulose wadding backed with corruguated fiberboard

When macerated paper cellulose faced, cellulose wadding, cotton wadding, or laminated cellulose wadding backed with corrugated fiberboard are used, the initial sheet of machine-glazed or highly calendered kraft paper, or waxed paper may be omitted. Cushioning material shall be secured by spiral ties of jute twine having a minimum breaking strength of 30 pounds. The spiral winding of twine shall be not more than two inches apart. At all points of securement, the twine shall be securely tied to maintain cushioning in position. Wherever twine cannot be utilized, the cushioning material shall be secured in a manner to prevent damage to the finish or the upholstery and to insure that cushioning material shall not become loose while in transit.

5.1.1.1.3 *Davenport (type I) and easy chair (type II).* Each davenport and easy chair shall have the slipcovers, packaged as specified in 5.1.1.1.1, placed under seat cushion(s). The seat cushion(s) with slipcovers in place shall be secured by tack-fastening a strip of 2-inch cotton tape to the back-frame member of the davenport or easy chair and drawing the free end of the tape snugly over the center of the cushion and tack-fastened to the underside of the front frame member. Tension of the tape shall be sufficient to prevent shifting of the cushion without leaving permanent set impressions in the cushion(s). Finished surfaces shall be protected from abrasion as specified in 5.1.1.1.2. Each davenport and each easy chair shall be covered with a prefabricated loose fitting kraft paper or a polyethylene dust cover bag tack-fastened to the underside of the frame members. Kraft paper used in the bag fabrication shall have a minimum weight of 40 pounds per ream conforming to grade B of UU-P-268. Polyethylene used in the bag fabrication shall be not less than 0.0015-inch thick, conforming to type I of L-P-378, with seams heat sealed as specified therein.

5.1.1.1.4 *Occasional chair w/arms (type III).* Each chair shall have all finished surfaces protected from abrasion as specified in 5.1.1.1.2. All upholstered seats and backs shall be completely covered with kraft paper or polyethylene film secured in place with tape or cross ties of twine. The kraft paper and polyethylene shall be as specified in 5.1.1.1.3.

5.1.1.2 *Class 2 furniture items.*

5.1.1.2.1 *Davenport (type I), easy chair type II, sectional davenport (type V), and*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

love seat (type VI). Finished surfaces of each furniture item shall be protected from abrasion as specified in 5.1.1.1.2. Furniture items with removable seat cushions shall have the cushion(s) secured as specified in 5.1.1.1.3. Furniture items with removable back and seat cushions shall have the back and seat cushions positioned horizontally on the chair seat and tied thereto with cotton tape or twine having a minimum breaking strength of 80 pounds. Tension of the tape or twine shall be sufficient to prevent shifting of the cushions without leaving permanent set impressions in the cushions. Each furniture item, including each section of sectional davenport, shall be covered with a prefabricated bag as specified in 5.1.1.1.3.

5.1.1.2.2 *Occasional chair w/arms (type III) and occasional chair w/o arms (type IV).* Each chair shall be packaged as specified in 5.1.1.1.4.

5.1.2 *Level C.* Furniture items shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 *Level A.*

5.2.1.1 *Davenport (classes 1 and 2—type* I). Each class 1 or class 2 davenport, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to class 2, style 2, 2½, 3, 4, or 4½ of PPP-B-621 or overseas type, style A of PPP-B-601. Alternatively, shipping containers may be used that conform to style G, class 2 of PPP-B-640. Skids shall be provided on each shipping container, as specified in 5.2.1.1.1, 5.2.1.1.2 or 5.2.1.1.3 as applicable. Interior blocking and bracing shall be applied to immobilize the contents while in transit and maintain 1-inch clearance between the legs and base of the container. Blocking shall be done in such a manner as to preclude damage of frame members. Blocking shall be cushioned to prevent marring of finish or causing permanent set impressions of upholstered areas. Each davenport shall be further protected by a waterproof shroud fabricated from material conforming to class L-2, M-1, M-2, or M-3 of UU-P-271 or material conforming to type CW-2 of MIL-B-13239. All seams of the shroud shall be completely sealed with water-resistant adhesive conforming to MIL-A-140 except when heat sealable material is used. Seams shall be minimum ¾ inch wide, except heat sealed seams shall be minimum ½ inch wide. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.1.1.1 *Cleated type containers.* Cleated type containers conforming to PPP-B-601 shall be provided with three nominal 2- by 4-inch skids laid flat, positioned parallel to the ends and extending the full exterior width of the shipping container. One skid shall be placed at each end, set in approximately three inches, and the third skid placed equidistant between the end skids. Filler cleats, of the same thickness as the container cleats and same width as skids, shall be provided between each skid and the bottom panel of the shipping container. The ends of the skids shall be beveled one-half the thickness at a 45-degree angle and notched to provide clearance for longitudinal strapping. The skids shall be secured by nailing through the bottom panel, the filler cleats, and the skids; and the nails clinched not less than ⅛ inch. Nails fastening the skids shall be arranged in two rows in a staggered pattern with spacing between nails in each row to be not more than six inches. Each row of nails shall be approximately ½ inch in from the edge of the skid. The nailing pattern shall begin and end approximately 1½ inches in from the ends of each skid.

5.2.1.1.2 *Nailed wood containers.* Nailed wood containers conforming to PPP-B-621 shall be provided with skids as specified in 5.2.1.1.1, except that additional skids shall be used in place of each bottom batten when

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

intermediate battens are required, and filler cleats and notching of skids shall not be required.

5.2.1.1.3 *Triple wall corrugated fiberboard boxes.* Triple wall corrugated fiberboard boxes conforming to PPP-B-640 shall be provided with skids as specfied in 5.2.1.1.1, except that filler cleats and notching of skids shall not be required. Metal washers having a minimum ¾-inch outside diameter, or metal clips specifically designed for use in nailing wood members to fiberboard, shall be placed between the nailhead and the fiberboard.

5.2.1.2 *Easy chair (classes 1 and 2—type II), occasional chair (classes 1 and 2—type III, and class 2—type IV), and sectional davenport (class 2—type V.)* Each class 1 or class 2 chair and each section of sectional davenport, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to class 2, V3c or v3s, style FOL of PPP-B-636. Each fiberboard shipping container shall be waterproofed with tape in accordance with the appendix of the container specification. Alternatively, shipping containers may be used that conform to overseas type of PPP-B-601, except that the minimum thickness of the plywood shall be ¼ inch and cleat size shall be a minimum ¾ by 1¾ inches, or class 2, style 2, 2½, 3, 4, or 4½ of PPP-B-621, except that the end cleats shall be minimum ¾ by 2½ inches; end panels shall be minimum ¾ inch thick, and thickness of sides, top and bottom panels shall be a minimum ⅝ inch, or style G, class 2 of PPP-B-640. Each alternative shipping container shall be provided with a type I or II, grade B or C, class 2 sealed case liner conforming to MIL-L-10547. The material for the fabrication of the case liner shall be type CW-2 of MIL-B-13239 or class L-2, M-1, M-2 or M-3 of UU-P-271. A fiberboard pad shall be placed under each leg to prevent puncturing of the case liner. Closure and reinforcing with flat steel strapping or tape banding shall be in accordance with the appendix of the applicable container specification.

5.2.1.3 *Love seat (class 2—type VI).* Each love seat, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that skids shall not be required and additional shipping containers may be used that conform to overseas type, style A of PPP-B-591, except that the cleat size shall be a minimum ¾ by 1¾ inches.

5.2.2 *Level B.*

5.2.2.1 *Davenport (classes 1 and 2—type I) and love seat (class 2—type VI).* Each class 1 or class 2 davenport or love seat, packaged as specified in 5.1, shall be packed in an unsheathed crate conforming to style B-2 of MIL-C-11456, except that the dimension limitations shall be waived and the distance between intermediate members shall not exceed eight inches. Blocking and bracing shall be applied to immobilize the item of furniture while in transit and maintain 1 inch clearance between the legs and base of the crate. Blocking and bracing shall be provided with cushioning material wherever it comes in contact with the furniture item.

5.2.2.2 *Easy chair (classes 1 and 2—type II), occasional chair (class 1 and 2—type III and class 2—type IV), and sectional davenport (class 2,—Type V.)* Each class 1 or class 2 chair and each section of sectional davenport, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to type I, class 1, style FOL of PPP-B-636. The minimum bursting strength of the fiberboard shall be 275 p.s.i. and body joint shall be lapped and secured with metal fastenings, spaced not more than 2 inches apart. All flaps of the fiberboard container shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps. Alternatively, shipping containers may be used that conform to domestic type, style A of PPP-B-591, except that minimum bursting strength of the fiberboard shall be 275 p.s.i. and minimum cleat size shall be ¾ by 1¾ inches; domestic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

type, style A of Specification PPP-B-601, except that minimum thickness of plywood shall be 3/16 inch and minimum cleat size shall be ¾ by 1¾ inches; or class 1, style 2, 2½, 3, 4, or 4½ of PPP-B-621, or style G, class 1 of PPP-B-640.

5.2.3 *Level C.* Furniture items, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129. Shipping container marking shall also specify color of upholstery or covers and, where applicable, the winter slipcover color and the summer slipcover print.

5.3.2.1 *Additional marking.* Special handling marking requirements applicable to fragile items and arrows shall apply.

6. NOTES

6.1 Intended use. Class 1 furniture is intended for use where a specific detailed design for living room furniture is required. Class 2 furniture is intended for use where a selection of commercial designs for living room furniture is desired.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Class, type, and method required (see 1.2).

(c) When preproduction sample is waived (see 3.2).

(d) Color of thread if other than that specified (see 3.3.1.6).

(e) Whether crown portion of seat cushions shall not be 5 inches thick and whether back cushions shall not be 4 inches thick (see 3.3.1.8.3.2).

(f) Denim required if other than that specified (class 1 only) (see 3.3.1.13.1).

(g) Color and finish of artificial leather (class 1 only) (see 3.3.1.13.2).

(h) Class and style covers required (class 1 only) (see 3.3.1.13.3).

(i) Upholstery covers required for class 2 furniture (see 3.3.1.14).

(j) Muslin required for class 2 if other than that specified (see 3.3.1.14.1).

(k) Upholstery fabric required for class 2 (see 3.3.1.14.2).

(l) Color of leather when used for class 2 (see 3.3.1.14.4).

(m) General design and dimensions for class 2 furniture (see 3.4.2).

(n) When 4/4 lumber is permitted in fabrication of wood frames for class 2 furniture (method A) (see 3.4.2.2.1).

(o) Covering material for coil spring and insulated seat platform for class 2, method B furniture (see 3.4.2.2.3).

(p) Whether cushions are to be spring filled (see 3.4.2.2.7.1), or molded foam rubber (see 3.4.2.2.7.2) or pin-core foam rubber (see 3.4.2.2.7.2.1).

(q) Color of finish on exposed wood surfaces for class 2, method B furniture (see 3.5.2).

(r) Inspection record details (see 4.1).

(s) Whether quality assurance provisions apply to class 2 furniture (see 4.2).

(t) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6.3 Federal specifications do not include all types, classes, grades, sizes, et cetera, of the commodities indicated by the titles of this specification, or which are commercially available, but are intended to cover the types, et cetera, which are suitable for Federal Government requirements.

6.4 The rubbed finish of the standard reference panels for class 1 furniture was obtained by the use of No. 320 paper followed by pumice and lubricant.

6.5 Bid samples for class 2 furniture. The invitation for bids should give a list of samples of materials, including upholstery fabrics, which are to be furnished. Purchasers should request that at least twice the minimum number of fabrics required should be furnished with bids, in order to allow for adequate color and pattern selection.

6.6 Standard pack (civil agencies). The standard pack for this commodity should be as specified in 5.1.1 and 5.2.2. The standard pack requirements are intended for use in procurements of stores, stock replenishments. Procuring officers should use the standard pack requirements when it is known that the material will be shipped from a supplier to a domestic warehouse, supply depot, or immediate storage point for temporary storage, subsequent issue and shipment to eventual user.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY CUSTODIANS:
Army—Q
Navy—Y
Air Force—MOA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

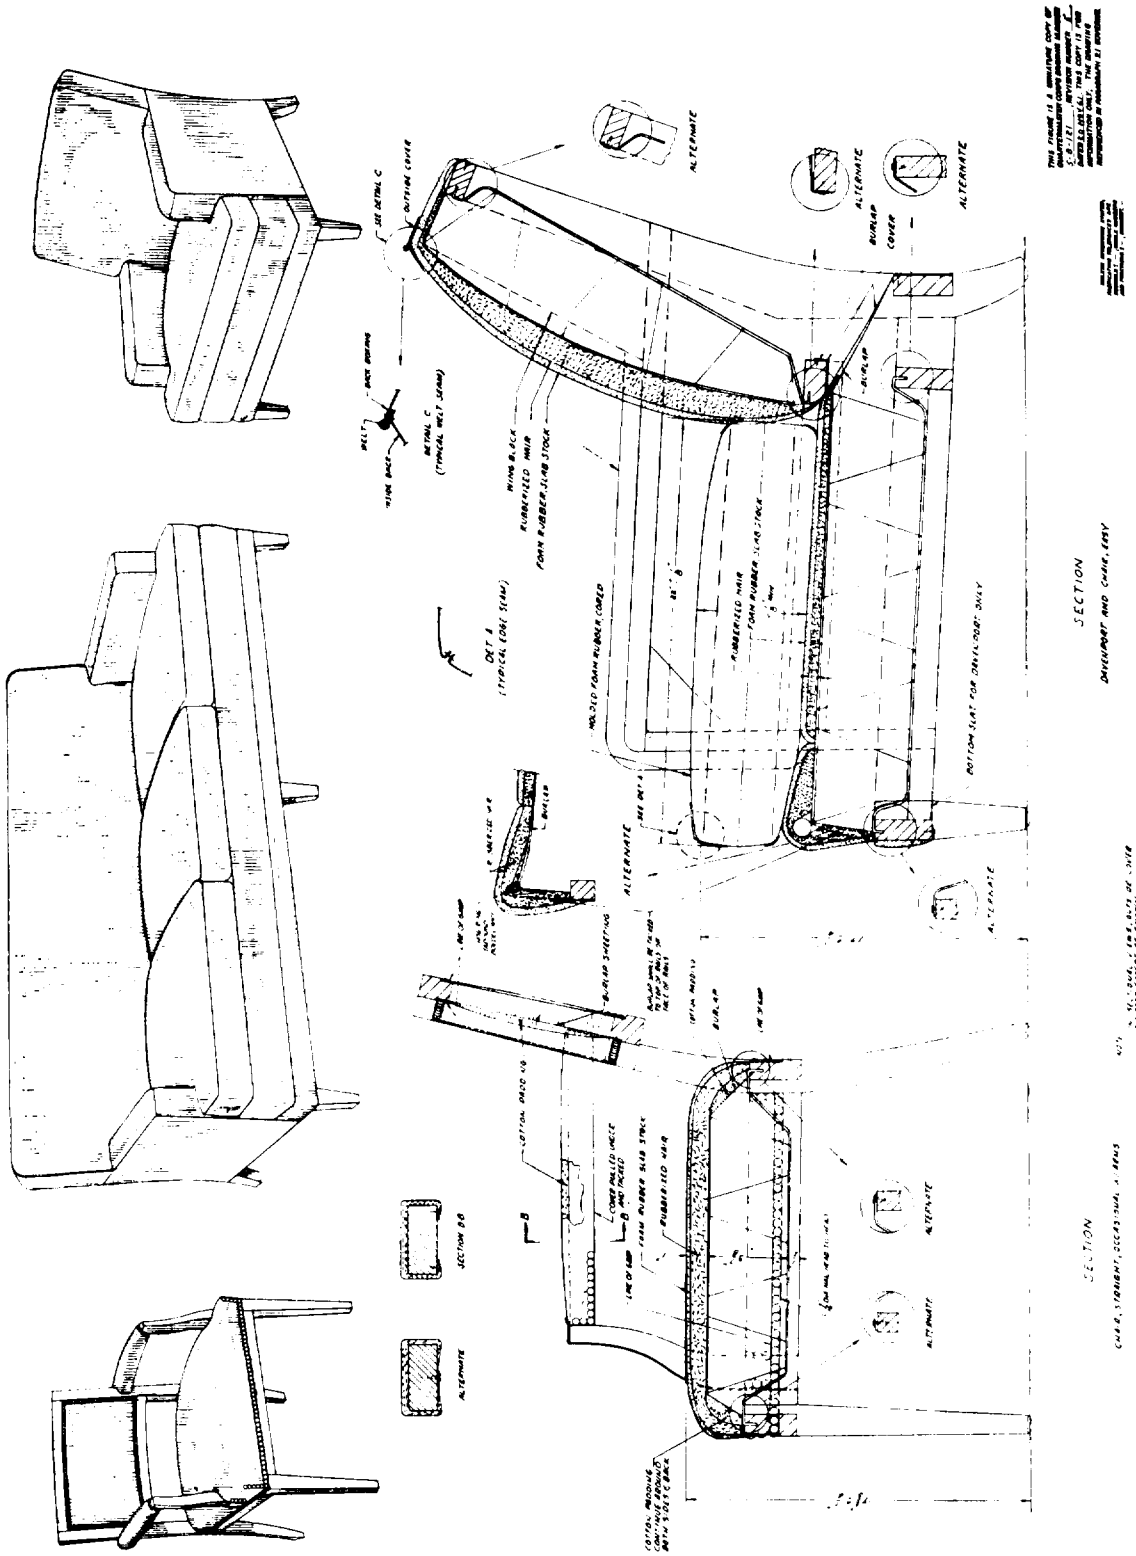


FIGURE. 1.—*Household furniture, living room, wood, upholstered; illustrations and sections. Davenport, chair, easy; chair, straight, occasional, W/arms. (Quartermaster Corps Drawing No.* 5-8-121).

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T11:40Z
Check the source to verify that this is the currentversion before use.

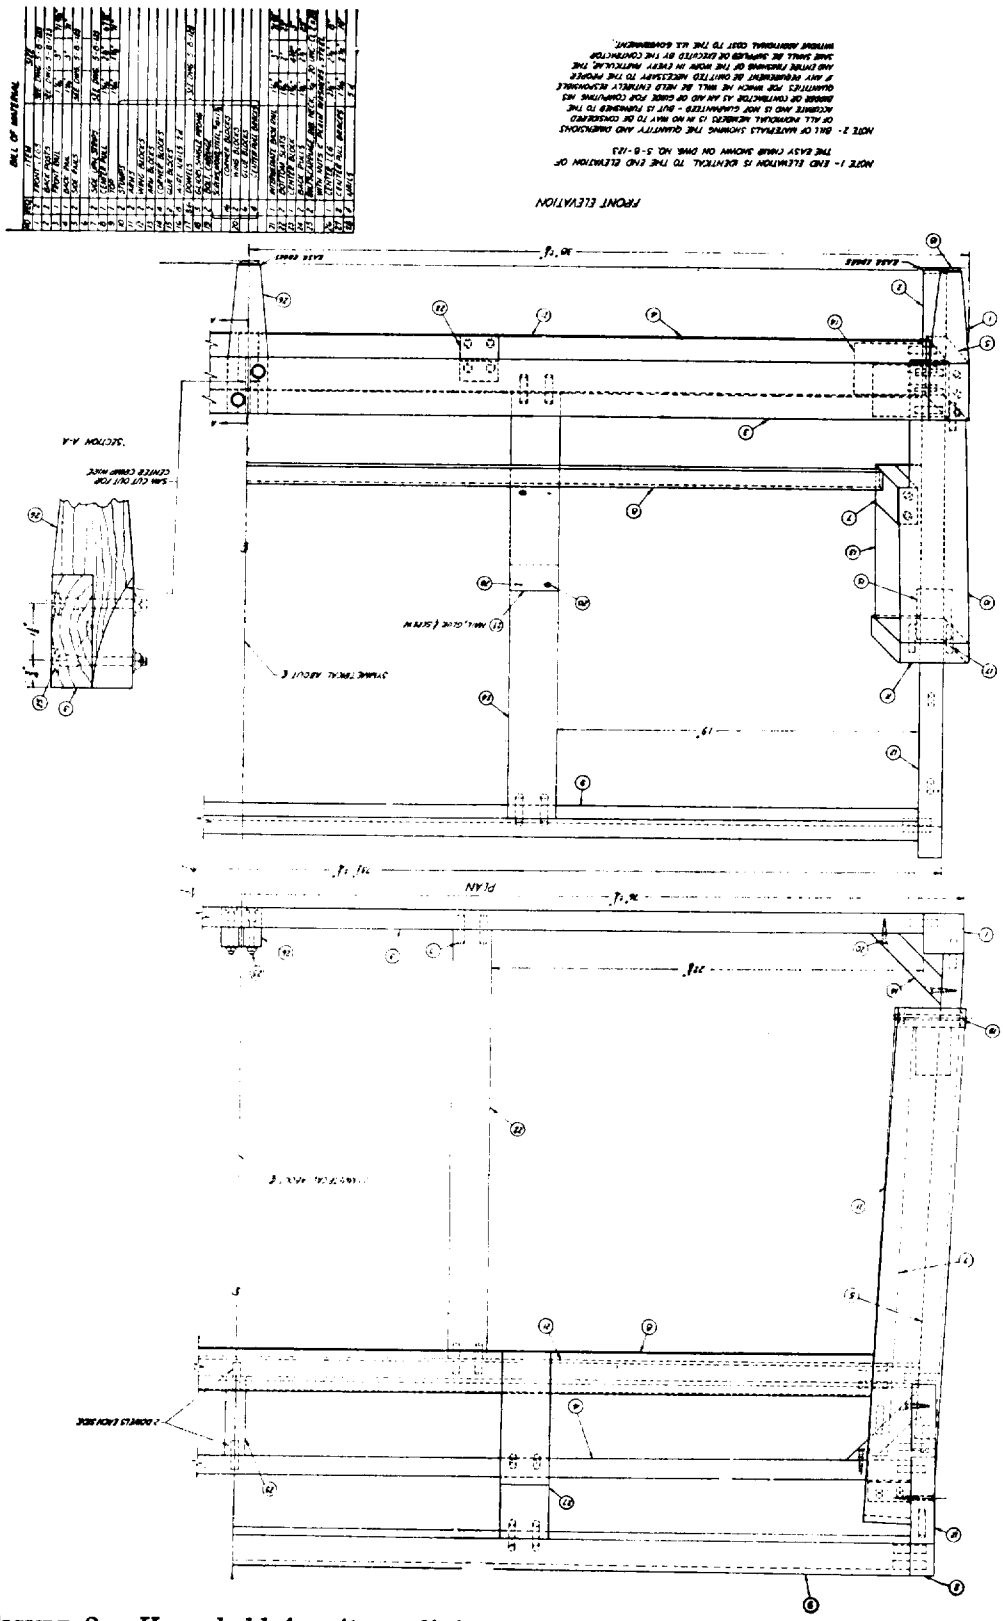


FIGURE 2.—*Household furniture, living room, wood, upholstered, davenport. (quartermaster Corps Drawing No.* 5-8-122.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the currentversion before use.

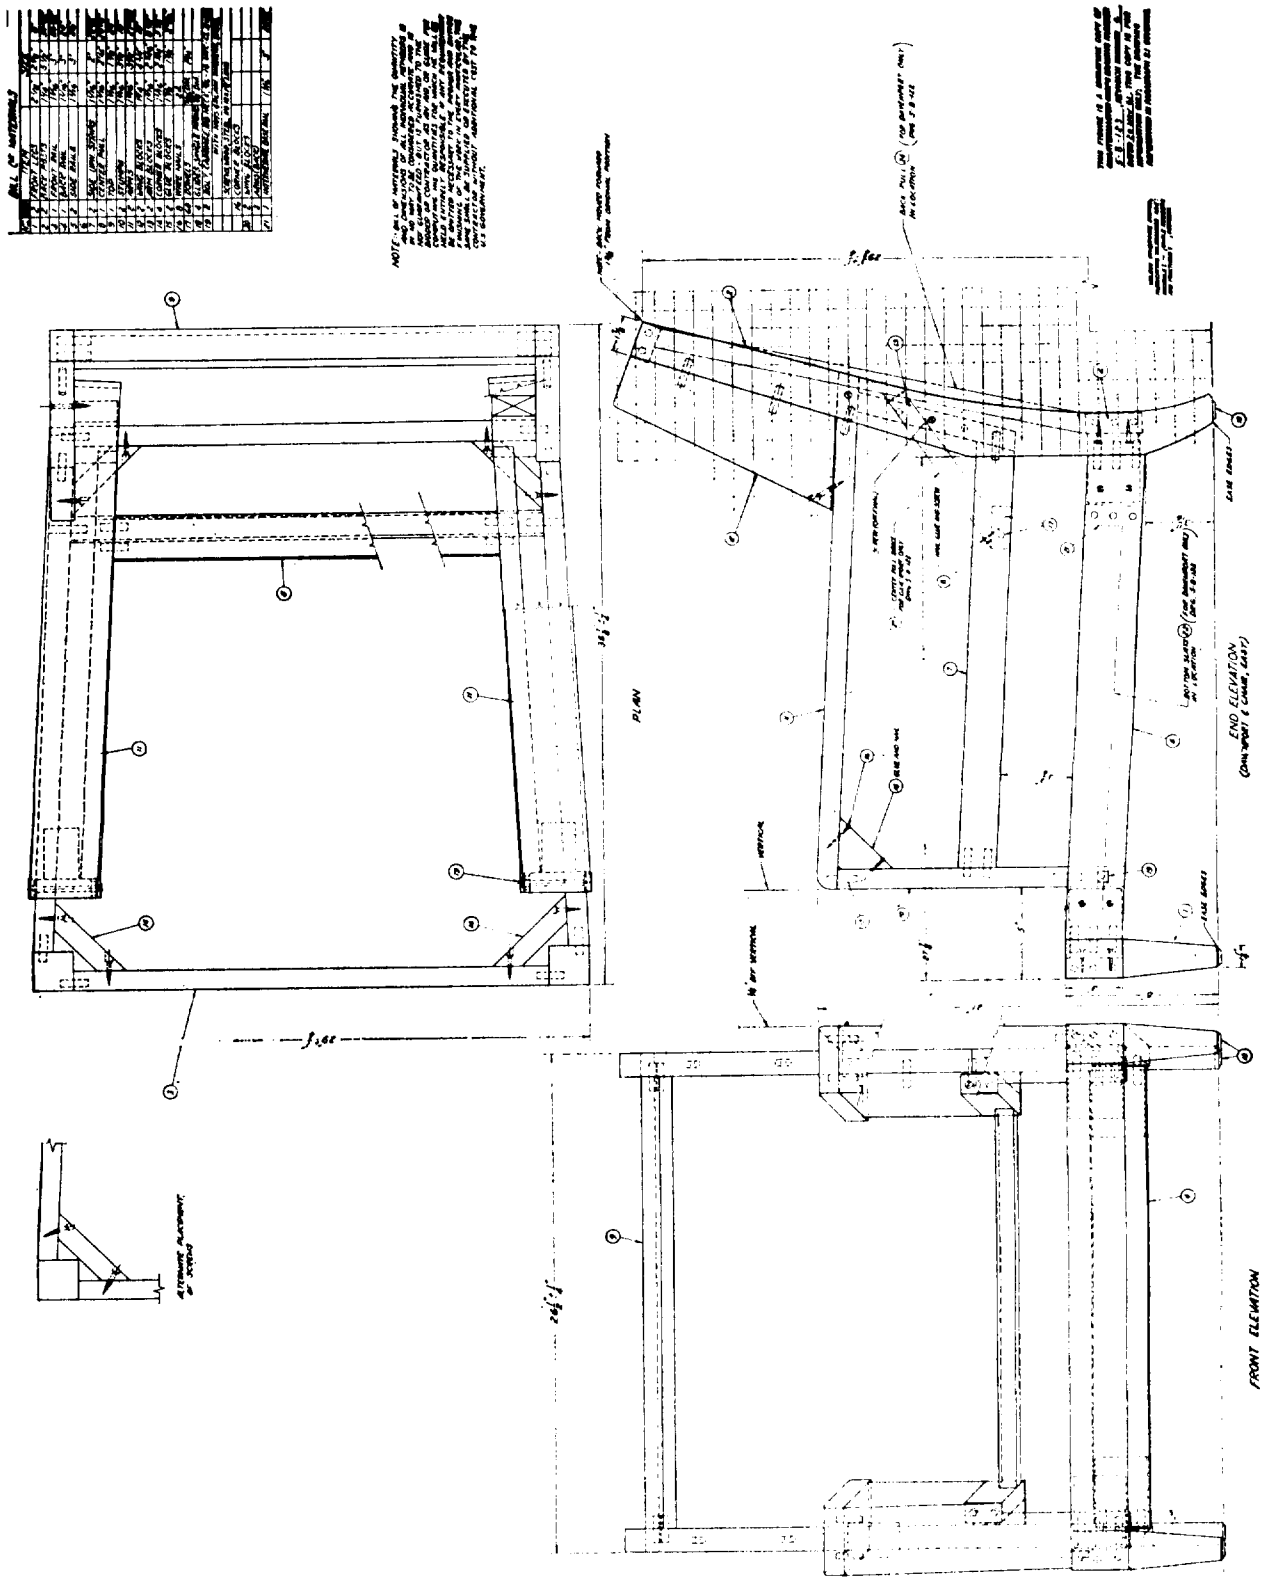


FIGURE 3.—*Household furniture, living room, wood, upholstered, chair, easy. (Quartermaster Corps Drawing No. 5-8-123.)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

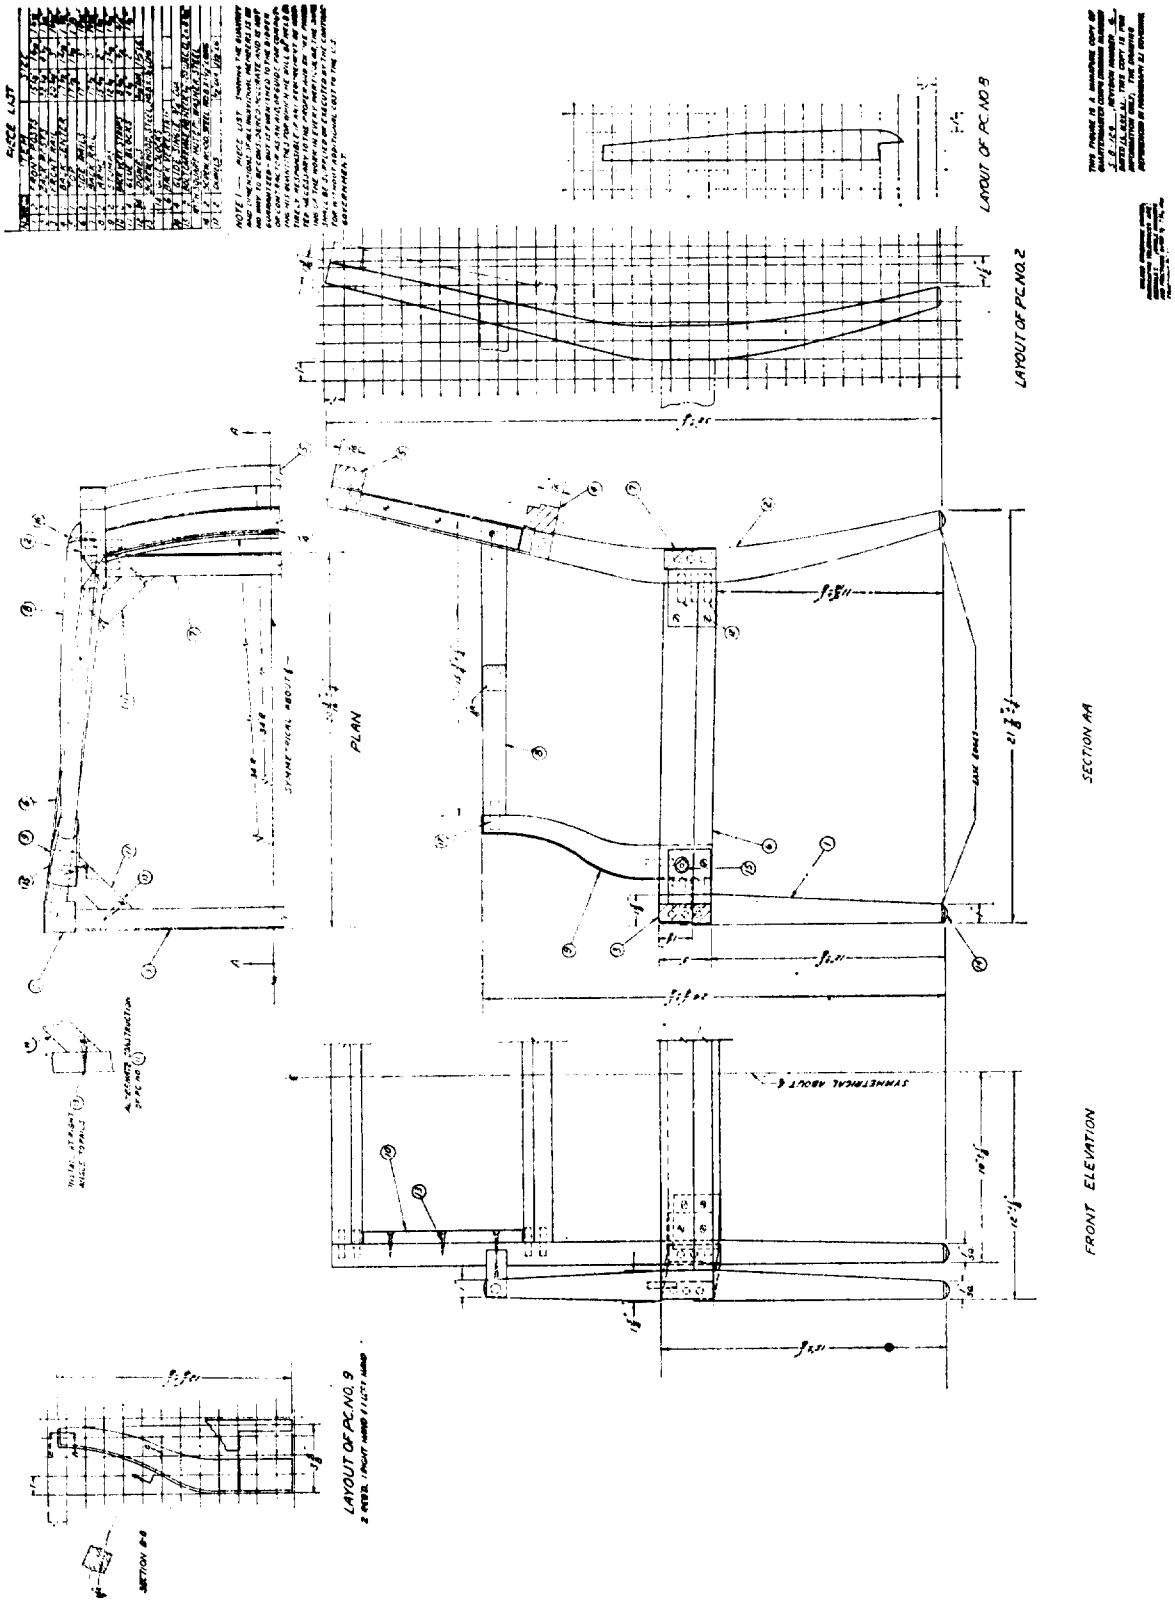


FIGURE 4.—*Household furniture, living room, wood, upholstered, chair, straight, occasional, W/arms. (Quartermaster Corps Drawing No. 5-8-124.)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.