AA-O-00240/2C(GSA-FSS)
September 8, 1970
SUPERSEDING
Int. Fed. Spec. AA-O-00240/2b(GSA-FSS)
April 7, 1967
INTERIM REVISION OF
Fed. Spec. AA-O-240
February 2, 1961

INTERIM FEDERAL SPECIFICATION

FOR

DESK ATTACHMENTS, L-UNIT, TABLES, STEEL, UNITIZED

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-O-240, dated February 2, 1961.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for L-unit desk attachments; the general requirements and other information pertaining to the L-unit desk attachments will be found in AA-O-00240e, Office Furniture, Steel, Unitized (General Specification). The L-unit desk attachments are designed for use with L-unit desks. (see 6.1).

1.2 Classification.

1.2.1 Styles and classes. The L-unit desk attachments shall be of the styles and classes as specified. (see 6.2).

Style A - Clerical table, 66 inches wide, 18 inches deep.

Class 1 - Without back panel.
Class 2 - With back panel.

Style B - Secretarial table.

Size 1 - 66 inches wide, 18 inches deep.

Class 1 - Without stationery compartment.
Class 2 - With stationery compartment in right or left pedestal.
Class 3 - With angled filing-storage unit.

Unit a - Single right pedestal.
Unit b - Single left pedestal.

Size 2 - 72 inches wide, 18 inches deep

Class 1 - With drawer compartment in right or left pedestal (containing 1 letter and 1 storage drawer)

Style C - Filing table, 66 inches wide, 18 inches deep, with filing cabinet in right or left pedestal

Class 1 - Pedestal containing 1 letter drawer and 2 storage drawers
Class 2 - Pedestal containing 2 letter drawers

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Style D - Interview table

Size 1 - 66 inches wide, 24 inches deep

Class 1 - Without drawer pedestal
Class 2 - With drawer pedestal containing 2 letter drawers

Size 2 - 72 inches wide, 24 inches deep

Class 2 - With drawer pedestal containing 2 letter drawers

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

AA-O-00240 - Office Furniture, Steel, Unitized, General Specification
UU-P-268 - Paper, Kraft, Untreated, Wrapping
PPP-B-636 - Box, Fiberboard
PPP-C-843 - Cushioning Material, Cellulosic
PPP-T-97 - Tape, Pressure-Sensitive Adhesive, Filament Reinforced

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies)

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified in the invitation for bids, the requirements of 3.1 of AA-O-00240 shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.2 Material. The material used in the construction of the L-unit tables shall be of the kind and quality specified in 3.2 of AA-O-00240 and as specified herein. The paragraph numbers of the material used in the L-unit table construction are listed in Table I.

TABLE I. Material reference

AA-O-00240 Paragraph Number	Material
3.2.1	Steel
3.2.2	Linoleum
3.2.3	Plastic laminate sheet
3.2.4	Finishing material
3.2.4.1	Primer
3.2.4.2	Enamel
3.2.4.3	Zinc coating
3.2.4.4	Cadmium plating
3.2.4.5	Chromium plating

3.2.5 Face hardware. The face hardware shall be constructed of satin finished anodized aluminum; type 302 corrosion-resistant steel; satin finished chromium on steel, die-cast zinc, brass or bronze, in accordance with 3.2.4.5 of AA-O-00240. Tensile strength of die-cast zinc shall be not less than 40,000 p.s.i. The exposed surfaces of drawer and door pulls used on a single unit shall be of the same material and finish.

3.3 Construction. The construction details of the L-unit tables shall be as specified in the applicable paragraphs of AA-O-00240 and as specified herein. The paragraph numbers of the construction details are listed in Table II.

TABLE II. Construction reference

AA-O-00240 Paragraph Number	Construction
3.3.1	Spot welding
3.3.2	Brazing
3.3.2.1	Fabricating terms
3.3.4	Color
3.3.4.1	Metal finish
3.3.4.2	Linoleum
3.3.4.3	Plastic laminate sheet
3.3.5	Tolerances, Top size and height
3.3.6	Assembly
3.3.7	Top construction
3.3.7.1	Top plate and edge molding
3.3.7.2	Binding strip
3.3.7.3	Linoleum top covering
3.3.7.4	Plastic laminate top covering. When specified in invitation for bids.
3.3.7.4.1	Control samples for plastic covered tops.

3.3.8 Design. The design and dimensions of the L-unit tables shall be as shown in the applicable figures and as specified herein. The tables shall be adjustable in height continuously from 29 inches to 30-1/2 inches. The height of the Style B secretarial tables, having 2-level top surfaces, shall be from 29 inches to 30-1/2 inches at one end and from 26 inches to 27-1/2 inches at the other end. The tables shall withstand the tests specified in 4.4 of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.9 Reversal of pedestals and end panels. The L-unit tables shall be as shown in the applicable figures, however, end panels and pedestals shall be capable of reversal in the field. Holes corresponding to holes used for attachment of back panel shall be provided in the end panels and pedestals as specified herein. Additional holes shall be provided in top reinforcing members to permit reversal of pedestal and end panel.

3.3.10 Clamping. The L-unit tables shall be so constructed as to permit clamping to L-unit desks specified in AA-O-00240/1 by means of the C-Clamp specified in AA-O-00240/1. The C-Clamp is to be attached to the underside edges of the table and L-unit desk and shall be inserted and tightened as shown in Figure 1. The underside of the table shall require no more than 1-9/16 inches of the clamp opening. The single level tables shall accommodate the clamp at any point along the length of the top except for the portion covered by end panels or pedestals. The secretarial tables (2-level tops) shall have a cut-out for clamping as shown in Figure 3.

3.3.11 End panel. The end panel shall be constructed of one piece of 22 gage (0.0299 inch) steel with the ends joined in the center of the kneespace side of the panel. The edges to be joined shall be formed to provide an integral stiffener and securely welded together. Alternatively, a separate stiffener may be applied to the inside of the panel and securely welded to both edges of the end panel. The joinings shall be smooth and even. The top edges of the panel shall be flanges outward for attachment to the reinforcing members in the top by means of bolts, nuts and lockwashers or by clamps designed for the purpose. Any attachment method shall be easily removable and capable of reassembly without the use of special tools. Additional bolt holes shall be provided in the top reinforcing members to accomplish repositioning shown herein. The bottom edges of the end panel shall be flanged inward and shall have a formed spacer of not less than 20 gage (0.0359 inch) steel securely welded to the inside bottom of the panel. The formed spacer shall cover the entire open bottom of the end panel including the radii at each end of the end panel. The formed spacer shall be located not more than 1 metal thickness from the bottom edge of the end panel. Alternatively, the bottom edge of the end panel shall be flanged around its entire perimeter and the formed spacer shall cover the entire open bottom of the end panel except for the radii at the four corners of the end panel, and may be located above the bottom edge of the end panel. The height adjustment support shall incorporate a threaded nut and shall be constructed of not less than 16 gage (0.0478 inch) steel and shall be spot welded to the inside of the end panel. Alternatively, the formed spacer may be not less than 16 gage (0.0598 inch) steel located and attached as specified herein and shall have provisions for attachment of the height adjustment support. The end panel thickness shall be 2-1/2 inches. The four vertical edges shall have not less than 1/4 inch or more than a 3/4 inch radius. The end panels shall be equipped with height adjustment mechanisms in accordance with 3.3.13 and 3.3.13.1. The height adjustment mechanism shall be located within 1/2 inch of the extreme outer edge of the end panel. Except for Style A, Class 1 table, holes corresponding to the holes used for attachment of the back panel shall be provided in the opposite edge of the end panel so that back panel can be attached at either end of the side panel. Holes are to be made in one side of end panel only. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 and 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to secure the back panels specified in 3.3.12, the kneespace shelf of the unitized desk specified in 3.3.23 of AA-O-00240/1 and the center drawer support specified in 3.3.16.5.6 of AA-O-00240/1, when applicable. Plug buttons shall be finished to match the finish of the end panel. One plug button shall be furnished for each hole not used for attachment of back panel.

3.3.12 Back panel. The back panel shall be constructed of not less than 20 gage (0.0359 inch) steel. The side edges and the top edge shall be formed in a 90 degree flange. The bottom edge shall be formed in a return flange. The side flanges of the back panel shall be attached to the end panel or pedestal side by not less than 3 attachments. The height of the back panel shall be as shown in the applicable figures and as specified herein. The back panel shall be located as specified herein.

3.3.13 Height adjustment mechanism. The height adjustment mechanism shall permit continuous height adjustment over a range of 1-1/2 inches minimum, and shall be entirely operable by hand.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

3.3.13.1 One-and-one-half inch diameter type. The height adjustment mechanism shall consist of a metal tube with a diameter of not less than 1-1/2 inches with a 3/8 inch 16-threaded stem. The bearing surface of the tube shall be fully closed and free from roughness or sharp edges. The tube and stem shall operate with a threaded nut incorporated in a support constructed of not less than 18 gage (0.0478 inch) steel. The threaded stem shall not be visible when the mechanism is adjusted to the highest setting. The tube and threaded stem shall be made corrosion resistant by cadmium plating in accordance with 3.2.4.4. The support may be zinc or cadmium plated in accordance with 3.2.4.3 or 3.2.4.4, or enameled in accordance with 3.4. The height adjustment mechanism shall be constructed and attached to the end panel in a manner to prevent loosening or instability.

3.3.13.2 Three-quarter inch diameter type. The height adjustment mechanism shall consist of a metal collar having a diameter of not less than 3/4 inch with a 3/8 inch threaded stem. The collar and stem shall operate with a threaded nut incorporated in a support constructed of not less than 16 gage (0.0478 inch) steel or alternatively, the collar and stem shall operate with a reinforcing plate constructed of not less than 14 gage (0.0747 inch) steel which shall be spot welded to the bottom plate of the pedestal. The reinforcing plate shall have an extrusion which has a minimum depth of 5/32 inch and which shall have a minimum of 3 complete internal threads to accommodate the stem. The collar shall have a metal footing not less than 1-1/4 inches in diameter. The bearing surface of the footing shall be fully closed and free from roughness or sharp edges. The threaded stem shall not be visible when the mechanism is adjusted to the highest setting. The collar, metal footing and threaded stem shall be made corrosion resistant by cadimum plating in accordance with 3.2.4.4. The support may be zinc or cadmium plated in accordance with 3.2.4.3 or 3.2.4.4, or enameled in accordance with 3.4. The height adjustment mechanism shall be constructed and attached to the panel or pedestal in a manner to prevent loosening or instability.

3.3.13.3 Leg. The configuration shall be similar to those shown in Figure 12. The leg shall consist of a cover which conceals the height adjustment mechanism. The cover shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be made corrosion resistant by chromium plating in accordance with 3.2.4.5 or by enameling in accordance with 3.4. Alternatively, the cover may be molded of non-woven fiber-glass-mat filled polyester in a color which matches the enamel color specified in 3.3.4.1. The cover shall be securely attached to the height adjustment mechanism.

3.3.14 Drawer pulls. The design and dimensions of the drawer pulls shall be as shown in Figure 13. The drawer pulls shall be of the materials specified in 3.2.5. Stamped drawer pulls will not be permitted. All surfaces and edges shall be smooth and shall be free from roughness and sharp edges. The pulls shall have 1/4 inch diameter threaded studs and shall be secured with solid nuts and lockwashers. The end of the stud and the nuts and lockwashers shall be recessed. No part of the attachment shall project beyond the inside drawer front. The exposed surfaces of all drawer pulls used on a single furniture unit shall be of the same material and finish.

3.3.15 Drawer construction. The drawer front shall fit square in the drawer opening, horizontally and vertically, and shall show equal opening between the drawer front and pedestal frame, or the sides and top when the drawer is closed. In the closed position, the drawer front shall be flush with the face of the pedestals, or alternatively, shall inset the face of the pedestal not more than 1/16 inch. The drawer fronts shall not touch when drawers are equally extended or during the full course of travel when adjoining drawers are opened or closed at the same time. When fully opened, the inside surface of the back of drawers shall not inset the face of the pedestal more than 1-1/2 inches.

3.3.15.1 Drawer fronts. The drawer front shall be of double wall construction. The outside drawer front shall be not less than 20 gage (0.0359 inch) steel. The top edge of the outside front shall be formed in a return flange to receive the inside drawer front. The side and bottom edges shall be formed in a return flange and an additional 90 degree flange to provide for welding to the drawer body by not less than 2 spot welds to each side and 4 spot welds to the bottom. (See figure 14). The return flange above the drawer side shall be flush with the inside drawer front. The inside drawer front shall be not less than 26 gage (0.0179 inch) steel. The four edges of the inside drawer front shall be formed in a flange or offset formation to fit into the outside drawer front and shall be held in place by spot welding or by the drawer pull fastenings. The bolt fastenings shall be recessed. The recessing may be in the form of a continuous channel across the inside drawer front. Alternatively, the side flanges may be omitted from the inside drawer front provided the latter has a channel formation, not less than 1-1/4 inch wide, extending the full length of the inside drawer front and centered on the attaching point. The four corners shall be neatly closed with no sharp edges and the top

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

corners brazed and ground smooth along the juncture of top and side flanges of the drawer front.

3.3.15.2 Storage drawer body and back. The storage drawer body shall be not less than 24 gage (0.0239 inch) steel. The height of the drawer sides shall be not less than 4 inches. The sides and bottom shall be formed in one piece. The upper edges of the sides shall be formed in a bead or return flange. The back shall be not less than 22 gage (0.0299 inch) steel and the upper edge shall be folded over or formed inward in a 90 degree flange. Alternatively, the back shall be not less than 18 gage (0.0478 inch) steel and the upper edge shall be smooth and without sharp edges. The back shall be securely welded to the sides and bottom of the drawer body, with the flanges on the outside of the drawer body or back. The drawer back shall be the same height as the drawer sides plus 0 inch, minus 1/8 inch.

3.3.15.3 Letter drawer body and back. The letter drawer body shall be not less than 24 gage (0.0239 inch) steel. The sides and bottom shall be formed in one piece. The upper edges of the sides of the drawer body shall be formed in a bead or return flange. Alternatively, the upper edges of the sides may be formed in a flat fold if the upper part of the drawer side is formed in a channel shape. The letter drawer back shall be of not less than 22 gage (0.0299 inch) steel and the top shall have a flat fold. Alternatively, the back shall be not less than 18 gage (0.0478 inch) steel and the upper edge shall be smooth and without sharp edges. The back shall be securely welded to the sides and bottom of the drawer body with the flanges on the outside of the drawer body or back. The back shall be the same height as the drawer sides plus 0 inch minus 1/8 inch. The inside height of the drawer sides shall be not less than 5-3/4 inches. The letter drawer body construction shall provide for the proper operation of the compressor specified in 3.3.15.8. Two openings will be permitted in the rear corners of the drawer body for the purpose of providing drainage for finishing materials. The openings permitted for this purpose shall not exceed 1/2 square inch or 1/2 inch in diameter.

3.3.15.3.1 Provisions for hanging file supports. When specified, the letter drawer shall be furnished with sides which are not less than 9-3/8 inches in height and shall provide for proper use of hanging files specified in 3.3.15.9.

3.3.15.4 Progressive suspension. All drawers shall operate on progressive side arm suspensions or on progressive cradle suspensions of the types specified in 3.3.15.4.1 or 3.3.15.4.2. The drawer suspensions shall withstand the tests specified in 4.5.2 and 4.5.3 of AA-O-00240.

3.3.15.4.1 Progressive suspension, side arm type. The steel used in the construction of the neutral members shall be not less than 16 gage (0.0598 inch) and shall be cadmium or zinc plated in accordnace with 3.2.4.3 and 3.2.4.4 except for areas burned during the welding process. Alternatively, black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. The slides shall travel easily, quietly and smoothly with the drawer. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller. Alternatively, each neutral member may operate on free solid rollers or solid balls. There shall be not less than five balls or rollers to each neutral member. If the design of the suspension is such that a separate housing is required for rollers or balls, the housing shall be not less than 16 gage (0.0598 inch) cold rolled steel, welded to the neutral member at each end by not less than two spot welds. Balls or rollers shall be incapable of dislocation or removal unless the suspension is dismantled.

3.3.15.4.2 Progressive suspension, cradle-type. There shall be two neutral members and not less than two tie members, all of which shall be not less than 16 gage (0.0598 inch) steel. The neutral members and tie members shall be joined by not less than two spot welds at each connection. All members shall be cadmium or zinc plated in accordance with 3.2.4.3 and 3.2.4.4, except for areas burned during the welding process. Alternatively, black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. The slides shall travel easily, quietly and smoothly with the drawer. Each neutral member shall have at least three main bearing rollers which are fixed journal ball bearing rollers and at least one solid stud bearing roller.

3.3.15.5 Drawer and case tracks. The drawer and case tracks shall be hot or cold rolled steel. The case tracks shall be not less than 14 gage (0.0747 inch) steel and the drawer tracks shall be not less than 16 gage (0.0598 inch) steel. After forming to shape, the drawer and case tracks shall have a Rockwell hardness of not less than 70 nor more than 85 on the "B" scale, or equivalent hardness on a comparable scale. The drawer and case tracks shall be finished in accordance with 3.2.4 and 3.4 of AA-O-00240. The case tracks shall be secured to at least the front and rear pedestal interior.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

reinforcing members by inter-locking of lugs on the case tracks into appropriate openings in the interior reinforcing members or by welding or bolting. Any of these attachments shall provide secure connections without vertical or horisontal movement. The drawer tracks shall be attached to the drawer sides by two rows of spot welds on not more than 4 inch centers, or alternatively, by one row of staggered spot welds on not more than 3 inch centers diagonally measured. Alternatively, the drawer tracks may be a Z formation spot welded to the drawer sides and bottom on not more than 3 inch centers.

3.3.15.6 Rollers and ball bearings. Fixed journal ball bearing rollers shall be accurately turned from cold rolled steel and case hardened and shall be not less than 7/8 inch in diameter and not less than 1/4 inch thick and both edges shall be chamfered. Alternatively, fixed journal ball bearing rollers may be cold formed from cold rolled steel and case hardended. Cold formed rollers shall be not less than 7/8 inch in diameter and not less than 1/4 inch wide axially. Cold formed rollers shall be of the unitary type, consisting of a one piece outer and a one piece inner race, with an unbroked smooth surface in the raceway, and a smooth unbroken rolling surface on the outer race, with the edges of the outer race chamfered, or formed with a radius, or a combination of both. The outer and inner races shall be concentric to within plus or minus, .0025 inch, and the entire outer rolling surface shall be parallel to the axis of the bearing to within plus or minus .0025 inch. Free rolling solid balls shall be not less than 3/8 inch diameter, hardened and polished.

3.3.15.7 Drawer stops. Each drawer shall be equipped with a positive stop which will prevent the drawer from falling out when fully extended but will permit easy removal of the drawer when desired. The drawers shall contact bumpers of rubber or other durable energy absorbing material on the inward movement.

3.3.15.8 Compressor. Each letter drawer shall be equipped with a compressor. The compressor shall operate within the letter drawer for front-to-back filing. The compressor shall, be of the friction locking type and shall operate easily within the drawer when released and hold firmly when engaged. The clearance between the compressor and its track or guide shall be kept to a minimum, so as to prevent the compressor from facing off at an angle and out of square with the drawer sides when in operation, and from seating out of square when engaged. Alternatively, the compressor may be the positive locking type and shall be held in place by engaging slots along the drawer side and shall be held securely in a right angle position to the drawer sides at no greater than 1 inch increments except for a maximum of 4 inches at the front of the drawer. The locking method shall prevent disengagement by pressure of filing material in the drawer. The compressor plate shall be not less than 18 gage (0.0478 inch) steel and shall have a roll or bead formation across the top edge. The tension release lever shall be not less than 20 gage (0.0359 inch) steel and shall be smoothly formed and reinforced for strength and convenience of releasing.

3.3.15.9 Hanging file supports. When specified hanging file supports shall be provided for letter drawers. The hanging file supports shall accommodate across-the-drawer filing of letter size hanging folders. The hanging folders are 11-3/4 inches wide by 9-7/8 inches high (9-7/8 inches includes 5/8 inch high tab). The folders are hung by means of arms which end in hooks and which extend 5/8 inch beyond each side edge of the folder. The hanging file supports shall consist of two removable supports and one removable partition. The supports shall be located across the drawer. One support shall be attached not more than 1-1/8 inch from the inside drawer front. The other support shall be located 12 inches, plus or minus 1/8 inch, back of the first support. The removable partition shall be located a sufficient distance from the back support to provide clearance for the folder arm and hook to rest and slide easily on the second support. The upper edges of the file supports shall be the same height as the inside height of the drawer side, 9-3/8 inches. The height of the partition shall be not more than 1 inch lower than the height of the drawer side. The edges of the supports and the partition shall be formed in a bead or fold or smoothly finished to prevent rough or sharp edges. Any bends in the design for the purpose of attachment to the drawer sides shall not interfere with insertion or withdrawal of hanging files. The partition shall be held in a vertical position at all times. The supports shall have sufficient strength and rigidity to hold the full capacity of hanging folders and filing material without sagging.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.16 Apparel hook. A single or double prong hook and mounting screws or bolts shall be furnished with each table. The hook shall be either malleable case iron, die-cast aluminum or zinc alloy. The hook shall be free of flaws, sharp edged and burrs. Hooks constructed of ferrous metals shall have a protective electrodeposited coating of cadmium or zinc. The over-all dimension of the hook measured perpendicular to the mounting surface shall be not less than 2-1/2 inches or more than 4 inches. The prong formation shall have an opening of not less than 1 inch and the prong shall terminate in either a ball, radius, or square with broken outside corners. Provisions for mounting in a vertical plane to the bottom of center top member shall be made 22-1/2 inches, plus or minus 1/8 inch from each end of top, with not less than 2 screws or bolts so that the direction of the prong is parallel with the center top member. Hook shall be shipped disassembled.

3.3.17 Filler strip. The secretarial table shall have a filler strip between the two tops. The design and dimensions of the filler strip shall be as shown in Figure 3. The filler strip shall be constructed of 20 gage (0.0359 inch) steel and shall be 1-1/2 inches in height. The filler strip shall have a 2-1/2 inch wide cut-out on each side located 7-1/2 inches from the end of the top. Each cut-out shall be provided with a removable metal cover plate of 20 gage (0.0359 inch) steel attached to the filler strip by two sheet metal screws. Except for the 2-1/2 inch wide cut-outs, the filler strip shall extend continuously beneath all four sides of the upper level top.

3.3.18 Style A clerical table, Class 1 without back panel, Class 2 with back panel. The design and dimensions shall be as shown in Figure 2.

3.3.18.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from the side edges of the top.

3.3.18.2 Back panel. Class 2 tables shall have a back panel as specified in 3.3.12 which shall be located 1-3/4 inches, plus or minus 1/16 inch, from back edge of top.

3.3.19 Style B secretarial table, Size 1 - 66 by 18 inches, Class 1 - without stationery compartment. The table shall have a two level top. The design and dimensions shall be as shown in Figure 3.

3.3.19.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from the side edges of the top.

3.3.19.2 Back panel. Shall be as specified in 3.3.12 and shall be located 1-3/4 inches, plus or minus 1/16 inch, from back edge of top.

3.3.19.3 Filler strip. Shall be as specified in 3.3.17.

3.3.20 Style B secretarial table, Size 1 - 66 by 18 inches, Class 2 - with stationery compartment, right or left pedestal. The table shall have a two level top. The design and dimensions shall be as shown in Figure 4.

3.3.20.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge of top.

3.3.20.2 Back panel. Shall be as specified in 3.3.12 and shall be located 1-3/4 inches, plus or minus 1/16 inch, from back edge of top and shall be the full height of the pedestal.

3.3.20.3 Filler strip. Shall be as specified in 3.3.17.

3.3.20.4 Stationery pedestal. The stationery pedestal sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the pedestal back; shall be free of burrs and sharp edges; and shall be spot welded on maximum of 4 inch centers. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the pedestal sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than 3/4 inch radius along the four vertical edges. The bottom shall be not less than 20 gage (0.0359 inch) steel, formed from one piece, and shall have a return flange formation on all four sides not less than 1-7/8 inches or more than 2-1/2 inches high, with the flanges facing downward. The return flanges shall be

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

attached to the pedestal 90 degree flanges of the sides and back by spot welding on maximum 4 inch centers. The face of the front return flange shall be flush with and welded to the return flange in the side panels. The pedestal shall have a top front rail constructed of not less than 18 gage (0.0478 inch) steel, incorporating the following 4 bends: A channel form and flanged formation along the front and a 90 degree flange along the back. The face of the front return flange shall be flush with, or shall be inset not more than one thickness of metal, and shall be welded to the return flange in the side panels and shall also be welded to the top flange of the side panels. Exposed joints on the pedestal front shall be free of burrs and rough edges. To provide for attachment of pedestal legs, the under side of the bottom shall be reinforced by means of one or two formed reinforcing members constructed of not less than 18 gage (0.0478 inch) steel placed in a back-to-front position. Flanges shall be provided in the reinforcing member(s) which shall be spot welded to the underside of the pedestal bottom. The legs shall be secured to the reinforcing members. The pedestal shall have two inner side panels of not less than 20 gage (0.0359 inch) steel. The top and bottom of the inner panel shall be flanged inward toward the side panel. The rear of the inner panel shall have a 90 degree flange formed to facilitate welding to the pedestal. The front of the inner panel shall have an off-set and 90 degree flange for intermembering with the return flange of the side panel. Alternatively, the pedestal shall have front and rear vertical reinforcing members constructed of 18 gage (0.0478 inch) steel which incorporate an interlocking arrangement for the inner side panel. The front and rear vertical edges of the inner side panel shall be formed in a 90 degree flange and offset for intermembering with front and rear vertical reinforcing members and to provide a flush fit. Provision shall be made on the inner panel to accommodate adjustable shelves on one inch centers to not more than 2 inches from top and bottom of the cabinet. This provision for shelf adjustment shall be applied to the outside surface of the inner panel, or may be an integral part of the panel. Holes corresponding to the holes used for attachment of back panel shall be provided in the opposite side of the pedestal to permit reversal of the pedestal in the field. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 or 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to properly assemble the item initially. All holes in one side of the pedestal shall be filled with plug buttons which shall be finished to match the pedestal finish. The pedestal shall be securely attached to the top through the front and rear reinforcing members with bolts, nuts and lock-washers or by clips designed for the purpose. Any attachment method shall be easily removable and capable of reassembly without the use of special tools. Additional bolt holes shall be provided in the top to accomplish repositioning of the pedestal as specified herein.

3.3.20.4.1 Shelves. The stationery compartment shall have not less than 5 adjustable shelves. The shelves shall be adjustable to not more than 2 inches from top and bottom of cabinet. The shelf shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be not less than 15 inches or more than 15-7/8 inches deep and shall have a 90 degree, 3/4 inch upward flange at the rear. Alternatively, a 100 degree, 1 inch upward flange at the rear is acceptable. A half-circle cut-out shall be centered on the front edge to permit easy removal of papers. All edges shall be ground smooth. The shelf shall fasten into the provisions in the inner side panels so as to permit easy adjustability and shall remain firmly in place. When in place, the front edge of the shelf shall be 1/2 inch, (plus or minus 1/8 inch) from the front of the compartment.

3.3.20.4.2 Leg. Shall be as specified in 3.3.13.3.

3.3.20.4.3 Height adjustment mechanism. Shall be in accordance with 3.3.13 and 3.3.13.1. The stem and tube shall operate in a manner to prevent the leg cover from contacting the floor when adjusted to the lowest position.

3.3.21 Style E secretarial table, Size 1 - 66 by 18 inches, Class 3 - with angled filing-storage unit, Unit a - right pedestal, Unit b - left pedestal. The design and dimensions shall be as shown in Figures 5 and 6. The table shall have a two-level top and shall be supported at the higher end by an end panel and at the lower end by a filing-storage unit.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.21.1 Table top. The top shall be as shown in Figure 5. The edge of the lower top shall be formed in a 110 degree, plus or minus 1 degree, angle as shown in Figure 5. The filing-storage unit shall be attached to the angled edge. Holes shall be provided in the underside of the edge molding for attachment of the top to the angle on the cabinet side. Attachment shall be by three sheet metal screws.

3.3.21.2 Filler strip. Shall be as specified in 3.3.17.

3.3.21.3 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge (90 degree angle) of top.

3.3.21.4 Back panel. The back panel shall be constructed of not less than 20 gage (0.0359 inch) steel. The top edge shall be formed in a 90 degree flange and the bottom edge shall be formed in a return flange. The side edge which attaches to the end panel shall be formed in a 90 degree flange and the side edge which attaches to the filing-storage unit shall be formed in a 70 degree return flange. The side flanges of the back panel shall be attached to the end panel and filing-storage unit by not less than 3 attachments to each side.

3.3.21.5 Filing storage unit.

3.3.21.5.1 Top Construction. The top shall be constructed in accordance with 3.3.7 (Table II) except the top plate shall be not less than 18 gage (0.0478 inch) steel and shall have one reinforcing member of not less than 18 gage (0.0478 inch) steel formed in a hat section located in the center of the top. The top size shall be 16-3/4 inches wide by 21 inches deep, and when in closed position, shall have 1/4 inch overhang at front and each side and 1-3/4 inch overhang at the back. The top shall be equipped with a drawer pull specified in 3.3.14, except the ends of the stud and the nuts and lockwashers need not be recessed and their projection beyond drawer front is not applicable. The drawer pull shall be located at center of front edge molding. Two rubber bumpers to each side shall be securely attached to the under side of edge molding to prevent top from contacting pedestal in either the open or closed position. The underside of the top shall be equipped with an apron which forms a part of the front of the cabinet when the top is in the closed position. The apron shall be constructed of not less than 20 gage (0.0359 inch) steel and shall have a 1/2 inch flange along the 4 edges and all corner edges shall be brazed and ground smooth along the entire joint. The apron shall be 2 inches in height (minus tolerance 3/32 inch) and shall extend the full width of the cabinet front between side panel front returns and shall be flush with the front returns when in a closed position. The apron shall be mounted to the bottom of the front edge molding with 3 screws. Means shall be provided for holding the top securely in the vertical position with the front edge of the top 5 inches (plus or minus 1 inch) above the top of the cabinet.

3.3.21.5.2 Top operating mechanism. The top shall open by raising in an arc at front and rolling to rest in a vertical position at rear of cabinet. The mechanism which controlls the movement of the top shall incorporate a device which will provide sufficient balance of the top to reduce manual effort in the lowering and raising of the top. The mechanism may incorporate pivot arms, channel runners and nylon rollers. There shall be no metal-to-metal contact. No part of the mechanism shall interfere with the clear filing space. Side-to-side movement of the top in operation shall be controlled so that the apron does not strike or scrape cabinet sides during opening and closing of top.

3.3.21.5.3 Cabinet construction. The cabinet sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the back; shall be free of burrs and sharp edges; and shall be spot welded on maximum of 4 inch centers. The front of the side panels shall be formed inward in a return flange. The bottom edges of the sides and back shall be formed in a 90 degree flange. The cabinet shall have not less than 1/4 inch or more than 3/4 inch radius along the four vertical edges. The cabinet bottom shall be not less than 20 gage (0.0359 inch) steel and shall be attached by spot welding on maximum of 4 inch centers to the bottom flanges of the sides and back. The front of the bottom plate shall be formed upward in a return flange to form the bottom part of the cabinet front section. The front face of this formation shall be flush with and securely welded to the front return flange of the cabinet side panels. Provision shall be made

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

in the four bottom corners for the secure attachment of the height adjustment mechanism. There shall be 4 interior vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel formed with no fewer than 2 bends, located at both front and rear cabinet corners.

3.3.21.5.4 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.2.

3.3.21.5.5 Caps. The top of the cabinet sides and back shall be capped. The caps shall be constructed of not less than 22 gage (0.0299 inch) steel. The caps over the sides and back of the cabinet shall extend down the outer surface of the cabinet sides and back, including the 3/4 inch radius at front and back corners for a distance not less than 1/2 inch. The caps shall extend down the inside of the cabinet sides and back to below the top edge of the vertical filing insert. All joinings shall be brazed and ground smooth, and shaping to proper formation shall be smooth and even. The inside flange of the cap and the return flange of the cabinet side panel shall be flush with each other. The bottom edges of the side and back caps shall be flanged inward and the flanges shall extend to the outer cabinet panels. All exposed surfaces of the caps shall be smooth and unbroken. Alternatively, when top, in open position, rests on a flange at back of cabinet, the back cap may be omitted and a formation consisting of not less than 3 bends may be used. This construction shall be of not less than 18 gage (0.0478 inch) steel and shall extend between the side caps and from the top edge of cabinet to below the top edge of the vertical filing insert. It shall also create a double wall condition at the back of the cabinet with the top surface being not less than 1/2 inch wide, formed in such a manner as to facilitate welding to the back of the cabinet.

3.3.21.5.6 Vertical filing section. The top portion of the cabinet shall consist of a vertical filing section. The cabinet front for this section shall be constructed of not less than 20 gage (0.0359 inch) steel. The top, bottom and side edges of the front section shall be formed in 90 degree flanges. The side edges shall be attached to the return flanges of the front return flanges of the cabinet side panels by not less than 4 sheet metal screws or by spot welding. The top edge of the front section shall be so located as to allow not more than 1/16 inch gap between the top edge and the apron. The bottom edge shall be located so as to provide not more than 1/16 inch gap between the bottom edge and the receding door of the shelf section.

3.3.21.5.7 Vertical filing insert. The filing insert shall be as shown in Figure 6. The filing insert shall fit in the cabinet so as to prevent movement from back-to-front or side-to-side. The front, back and sides of the filing insert shall be constructed of not less than 20 gage (0.0359 inch) steel. The sections shall be joined at edges by spot welding through flanges. The top edges of the back and sides shall be formed outward in a flat fold. The top edge of the front shall be flanged and shall fit under the flange in the cabinet front section. The bottom shall slope upward to the back forming an angle of approximately 84 degrees at front. The back shall be sloped toward the rear at an angle of 101 degrees, plus or minus 1 degree, to the insert bottom. The top of the filing insert shall be located 2 inches below the top of the pedestal. The inside height at the front of the filing insert shall be 9 inches, the inside height at the back of the filing insert shall be 7 inches. The front part of the insert shall rest on reinforcements in the cabinet case and the back part of the insert shall be equipped with legs which rest on the reinforcements. The minimum inside clear dimensions of the filing insert shall be 12-1/4 inches wide and 17-5/8 inches deep.

3.3.21.5.8 Partitions. The filing section insert shall be equipped with 3 fixed partitions 7 inches in height and spaced to provide 4 equal compartments. The partitions shall be not less than 20 gage (0.0359 inch) steel. The 3 partitions shall be sloped toward the rear at an angle of 101 degrees (plus or minus 1 degree) to the insert bottom. The side and bottom edges of the partitions shall be flanged and spot welded to the insert sides and bottom. The top edge shall be formed in a flat fold.

3.3.21.5.9 Stationery storage section. A stationery storage section shall be located immediately below the vertical filing section. The compartment shall contain 5 shelves and shall have a receding door. The storage section sides shall be constructed of not less than 20 gage (0.0359 inch) steel. The front edges shall be formed to the outside in a 90 degree flange and shall inset the face of the cabinet 1/2 inch. The lower portion of the 90 degree

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

flange in the storage section sides shall be cut away to clear the magnetic catches. The storage section top shall be constructed of not less than 20 gage (0.0359 inch) steel, flanged at the sides for attachment to storage section sides and the front edge shall be formed in a flat fold. The storage section bottom shall be constructed of not less than 20 gage (0.0359 inch) steel. The front edge shall be flanged downward 1 inch and the flange shall be formed in a flat fold. The side and rear edges shall be flanged for attachment to the storage section sides and back. The storage section back shall have 90 degree flanges on all four sides for attachment to the sides, top and bottom. The bottom shall be sloped downward to the back of the section at an angle of 3 degrees (plus or minus 1 degree). A magnetic catch shall be attached to the front vertical reinforcing members of the pedestal. The catch shall be located in the cut-out in the lower portion of the return flange in the storage section side. The inside clear dimensions of the storage section shall be 12-1/8 inches wide, 8 inches deep and 7-7/8 inches high with a plus or minus tolerance of 1/8 inch on all dimensions. The stationery storage section shall be supported at the bottom by two angles constructed of not less than 20 gage (0.0359 inch) steel welded to the front and rear pedestal vertical reinforcing members. The stationery storage section shall be secured in the cabinet by not less than 4 flat head (No. 6) self tapping screws.

3.3.21.5.10 Shelves. The storage section shall have 4 shelves constructed of not less than 20 gage (0.0359 inch) steel. Each shelf shall be sloped downward to the back of the section at an angle of 3 degrees (plus or minus 1 degree). The 4 shelves shall be located at 1-1/4 inch (plus or minus 1/8 inch) intervals from the top surface of the bottom. The side and back edges of the shelves shall be flanged for spot welding to section sides and back. The front edge of each shelf shall have a 2-1/2 inch radius cut out in the center. The front edges shall be ground.

3.3.21.5.11 Receding door. The stationery storage section shall be equipped with a receding door which shall entirely cover the stationery storage section when closed. The door shall be constructed of not less than 20 gage (0.0359 inch) steel. The bottom edge shall have a flange and flat fold; the side edges shall be channel formed and shall contact the magnetic catch when in closed position and the back edge shall be flanged. The door shall freely pivot on door support. The door support shall operate in channels constructed of not less than 20 gage (0.0359 inch) steel. The door shall be equipped with a stop which prevents its being pushed in beyond the face of the cabinet when opened or being pulled out beyond the face of the cabinet when closed. When closed the door shall be flush with the outside of the cabinet and shall fit squarely into the opening. The lower face of the door shall be equipped with a recessed hand or finger grip. All surfaces of the grip shall be smooth and without sharp edges.

3.3.21.5.12 Drawer section. The drawer section shall contain one storage drawer. The minimum inside clear dimensions of the drawer shall be 12 inches wide, 4-7/8 inches high and 15-1/4 inches deep. The drawer front shall fit square in the drawer opening, horizontally and vertically, and shall show equal opening between the drawer front and pedestal frame, on the sides and top when the drawer is closed. In the closed position, the drawer front shall be flush with the face of the pedestal, or alternatively, shall inset the face of the pedestal not more than 1/16 inch. When fully opened, the inside surface of the back of the drawer shall not inset the face of the pedestal more than 1-1/2 inches.

3.3.21.5.12.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.21.5.12.2 Storage drawer body and back. Shall be as specified in 3.3.15.2.

3.3.21.5.12.3 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.21.5.12.4 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.21.5.12.5 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.21.5.12.6 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.21.5.13 Apparel hook. Shall be as specified in 3.3.16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.22 Style B Secretarial table, Size 2 - 72 by 18 inches, Class 1 - Pedestal containing 1 letter, 1 storage drawer, right or left pedestal. The design and dimensions shall be as shown in Figure 7. The table shall have a two level top. The number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figure 7.

3.3.22.1 Filler strip. Shall be as specified in 3.3.17.

3.3.22.2 End panel. Shall be as specified in 3.3.11 and shall be located 8 inches, plus or minus 1/16 inch, from the end of the top.

3.3.22.3 Back panel. Shall be as specified in 3.3.12 and shall be located 1-3/4 inches, plus or minus 1/16 inch, from back edge of top and shall be the full height of the pedestal.

3.3.22.4 Pedestal construction. The pedestal sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the pedestal back; shall be free of burrs and sharp edges; and shall be spot welded on 4 inch (maximum) centers. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the pedestal sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than 3/4 inch radius along the four vertical edges. The bottom plate shall be not less than 18 gage (0.0478 inch) steel and shall be attached by spot welding on 4 inch (maximum) centers to the bottom flanges of the sides and back. The front edge of the bottom plate shall be formed upward in a return flange to form the bottom part of the pedestal front section. The front face of this formation shall be flush with and securely welded to the front return flange of the pedestal side panels. The pedestal shall have a top front rail constructed of not less than 18 gage (0.0478 inch) steel, incorporating the following 4 bends: The bends shall incorporate a channel form and flanged formation along the front and a 90 degree flange along the back. The face of the front return flange shall be flush with, or shall be inset not more than one thickness of metal, and securely welded to the return flange in the side panels and shall also be welded to the top flange of the side panels. Exposed joints on the pedestal front shall be free of burrs and rough edges. To provide for attachment of pedestal legs, the inside of the pedestal bottom shall be reinforced by means of one or two formed reinforcing members constructed of not less than 18 gage (0.0478 inch) steel, placed in a back-to-front position. There shall be four interior vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel formed with no fewer than 2 bends located at both front and both rear pedestal corners. The reinforcing members shall be spot welded to the sides of the pedestal. The vertical reinforcing members located at pedestal rear shall be joined at the top by a horizontal reinforcing member constructed of not less than 18 gage (0.0478 inch) steel formed with no fewer than 2 bends securely welded to the vertical reinforcing members. The front and rear vertical reinforcing members shall be punched and slotted for attachment of drawer suspension members. Holes corresponding to the holes used for attachment of back panel shall be provided in the opposite side of the pedestal to permit reversal of the pedestal in the field. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 or 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to assembly the item initially. All holes in one side of the pedestal shall be filled with plug buttons which shall be finished to match the pedestal finish. The pedestal shall be securely attached to the top through the front and rear reinforcing members with bolts, nuts and lock-washers or by clips designed for the purpose. Any attachment method shall be easily removable and capable of reassembly without the use of special tools. Additional bolt holes shall be provided in the top to accomplish repositioning of the pedestal as specified herein.

3.3.22.4.1 Leg. Shall be as specified in 3.3.13.3.

3.3.22.4.2 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.1. The stem and tube shall operate in a manner to prevent the leg cover from contacting the floor when adjusted to the lowest position.

3.3.22.5 Drawer pulls. Shall be as specified in 3.3.14.

3.3.22.6 Drawer construction. Shall be as specified in 3.3.15.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.22.6.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.22.6.2 Storage drawer body and back. Shall be as specified in 3.3.15.2.

3.3.22.6.3 Letter drawer body and back. Shall be as specified in 3.3.15.3.

3.3.22.6.4 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.22.6.5 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.22.6.6 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.22.6.7 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.22.6.8 Compressor. Shall be as specified in 3.3.15.8.

3.3.22.6.9 Hanging file support. Shall be as specified in 3.3.15.9.

3.3.22.7 Apparel hook. Shall be as specified in 3.3.16.

3.3.23 Style C Filing table, 66 by 18 inches, Class 1 - pedestal containing 1 letter and 2 storage drawers, right-or left-hand pedestal. The design and dimensions shall be as shown in Figure 8. The number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figure 8.

3.3.23.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge of top.

3.3.23.2 Back panel. Shall be as specified in 3.3.12 and shall be located 1-3/4 inches, plus or minus 1/16 inch, from back edge of top.

3.3.23.3 Pedestal construction. The pedestal sides and back shall be formed from one piece or from 3 pieces of not less than 22 gage (0.0299 inch) steel. The joinings of the 3 pieces shall be by flush construction at the pedestal back; shall be free of burrs and sharp edges; and shall be spot welded on maximum of 4 inch centers. The front of the side panels shall be formed inward in a return flange. The top and bottom edges of the pedestal sides and back shall be formed in a 90 degree flange. The pedestal shall have not less than 1/4 inch or more than 3/4 inch radius along the four vertical edges. The bottom plate shall be not less than 20 gage (0.0259 inch) steel and shall be attached by spot welding on maximum of 4 inch centers to the bottom flanges of the sides and back. The front edge of the bottom plate shall be formed upward in a return flange to form the bottom part of the pedestal front section. Alternatively, the front edge of the bottom plate may be flanged downward in a return flange. The front face of this formation shall be flush with and securely welded to the front return flange of the pedestal side panels. The pedestal shall have a top front rail constructed of not less than 18 gage (0.0478 inch) steel, incorporating the following 4 bends: The bends shall incorporate a channel form and flanged formation along the front and a 90 degree flange along the back. The face of the front return flange shall be flush with, or shall be inset not more than one thickness of metal, and securely welded to the return flange in the side panels and shall also be welded to the top flange of the side panels. Exposed joints on the pedestal front shall be free of burrs and rough edges. Provision shall be made in the four bottom corners for the secure attachment of the height adjustment mechanism. There shall be four interior vertical reinforcing members constructed of not less than 18 gage (0.0478 inch) steel formed with no fewer than 2 bends located at both front and both rear pedestal corners. The reinforcing members shall be spot welded to the sides of the pedestal. The vertical reinforcing members located at pedestal rear shall be joined at the top by a horizontal reinforcing member constructed of not less than 18 gage (0.0478 inch) steel formed with no fewer than 2 bends securely welded to the vertical reinforcing members. Alternatively, the horizontal reinforcing member, constructed of not less than 18 gage (0.0478 inch) steel, formed with no fewer than 2 bends, may be located at the top rear of pedestal. The horizontal member shall be spot welded to the sides and to the back of the pedestal. The

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

front and rear vertical reinforcing members shall be punched and slotted for attachment of drawer suspension members. Holes corresponding to the holes used for attachment of back panel shall be provided in the opposite side of the pedestal to permit reversal of the pedestal in the field. The holes shall not exceed 1/8 inch in diameter. Size numbers 7 or 8 sheet metal screws shall be used to attach members through the 1/8 inch diameter holes. The number of holes shall be limited to the number necessary to properly assemble the item initially. All holes in one side of the pedestal shall be filled with plug buttons which shall be finished to match the pedestal finish.

3.3.23.3.1 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.2.

3.3.23.4 Drawer pulls. Shall be as specified in 3.3.14.

3.3.23.5 Drawer construction. Shall be as specified in 3.3.15.

3.3.23.5.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.23.5.2 Storage drawer body and back. Shall be as specified in 3.3.15.2.

3.3.23.5.3 Letter drawer body and back. Shall be as specified in 3.3.15.3.

3.3.23.5.4 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.23.5.5 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.23.5.6 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.23.5.7 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.23.5.8 Compressor. Shall be as specified in 3.3.15.8.

3.3.23.5.9 Hanging file supports. Shall be as specified in 3.3.15.9.

3.3.24 Style C Filing table, 66 by 18 inches, Class 2 - pedestal containing 2 letter drawers, right or left hand pedestal. The design and dimensions shall be as shown in Figure 9. The number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figure 9.

3.3.24.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge of top.

3.3.24.2 Back panel. Shall be as specified in 3.3.12 and shall be located 1-3/4 inches, plus or minus 1/16 inch from back edge of top.

3.3.24.3 Pedestal construction. Shall be as specified in 3.3.23.3.

3.3.24.3.1 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.2.

3.3.24.4 Drawer pulls. Shall be as specified in 3.3.14.

3.3.24.5 Drawer construction. Shall be as specified in 3.3.15.

3.3.24.5.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.24.5.2 Letter drawer body and back. Shall be as specified in 3.3.15.3.

3.3.24.5.3 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.24.5.4 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.24.5.5 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.24.5.6 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.24.5.7 Compressor. Shall be as specified in 3.3.15.8.

3.3.24.5.8 Hanging file supports. Shall be as specified in 3.3.15.9.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.25 Style D Interview table, Size 1 - 66 by 24 inches, Class 1 - without drawer pedestal. The design and dimensions shall be as shown in Figure 10.

3.3.25.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edges of top.

3.3.25.2 Back panel. Shall be as specified in 3.3.12 and shall be located 7-1/2 inches and 15-1/2 inches from edges of the end panel. Extra holes shall be provided in the end panel so that the back panel may be located 11-1/2 inches from the edges of the end panel.

3.3.26 Style D Interview table, Size 1 - 66 by 24 inches, Class 2 - with pedestal containing 2 letter drawers, right or left-hand pedestal. The design and simensions shall be as shown in Figure 11. The number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figure 11.

3.3.26.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge of top.

3.3.26.2 Back panel. Shall be as specified in 3.3.12 and shall be located 7-1/2 inches and 15-1/2 inches from outer edges of the end panel. The back panel shall be attached to the cabinet 1-1/2 inches in from the back edge of the cabinet and 15-1/2 inches in from the front edge.

3.3.26.3 Pedestal construction. Shall be as specified in 3.3.23.3 and shall be located to provide a table top overhang of 6 inches at the back of the cabinet. Attachment of pedestal to top may incorporate a plate for attachment to top reinforcing members.

3.3.26.4 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.2.

3.3.26.5 Drawer pulls. Shall be as specified in 3.3.14.

3.3.26.6 Drawer construction. Shall be as specified in 3.3.15.

3.3.26.6.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.26.6.2 Letter drawer body and back. Shall be as specified in 3.3.15.3.

3.3.26.6.3 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.26.6.4 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.26.6.5 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.26.6.6 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.26.6.7 Compressor. Shall be as specified in 3.3.15.8.

3.3.26.6.8 Hanging file supports. Shall be as specified in 3.3.15.9.

3.3.27 Style D Interview table, Size 2 - 72 by 24 inches, Class 2 - with pedestal containing 2 letter drawers, right or left-hand pedestal. The design and dimensions of the table and the number, kind and minimum inside clear dimensions of the drawers shall be as shown in Figure 11, except that the top dimensions shall be 72 inches wide and 24 inches deep.

3.3.27.1 End panel. Shall be as specified in 3.3.11 and shall be located 1-1/4 inches, plus or minus 1/16 inch, from side edge of top.

3.3.27.2 Back panel. Shall be as specified in 3.3.12, and shall be located 7-1/2 inches and 15-1/2 inches from outer edges of the end panel. The back panel shall be attached to the cabinet 1-1/2 inches in from the back edge of the cabinet and 15-1/2 inches in from the front edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.27.3 Pedestal construction. Shall be as specified in 3.3.23.3 and shall be located to provide a table top overhang of 6 inches at the back of the cabinet. Attachment of pedestal to top may incorporate a plate for attachment to top reinforcing members.

3.3.27.4 Height adjustment mechanism. Shall be as specified in 3.3.13 and 3.3.13.2.

3.3.27.5 Drawer pulls. Shall be as specified in 3.3.14.

3.3.27.6 Drawer construction. Shall be as specified in 3.3.15.

3.3.27.6.1 Drawer fronts. Shall be as specified in 3.3.15.1.

3.3.27.6.2 Letter drawer body and back. Shall be as specified in 3.3.15.3.

3.3.27.6.3 Progressive suspension. Shall be as specified in 3.3.15.4.

3.3.27.6.4 Drawer and case tracks. Shall be as specified in 3.3.15.5.

3.3.27.6.5 Rollers and ball bearings. Shall be as specified in 3.3.15.6.

3.3.27.6.6 Drawer stops. Shall be as specified in 3.3.15.7.

3.3.27.6.7 Compressor. Shall be as specified in 3.3.15.8.

3.3.27.6.8 Hanging file supports. Shall be as specified in 3.3.15.9.

3.4 Pretreatment and finishing. Shall be in accordance with 3.4, 3.4.1, 3.4.2, 3.4.3 and 3.4.4 of AA-O-00240.

3.5 Identification marking. Shall be in accordance with 3.5 of AA-O-00240.

3.6 Workmanship. Shall be in accordance with 3.6 of AA-O-00240.

3.7 Knockdown construction. Tables may be shipped knocked down only to the extent that back panels, end panels, tops and pedestals are packaged separately. Back panels, end panels and tops shall be securely bound together so that they can be handled as one item. Style B secretarial tables shall be shipped with double top completely assembled.

3.8 Assembly instructions. The supplier shall furnish printed assembly instructions with each table. The text of these instructions shall be submitted for approval of the contracting officer.

4. QUALITY ASSURANCE PROVISIONS. The requirements of Section 4 of AA-O-00240 and as specified herein shall apply.

4.2.2.1 Visual examination. Examination of the tables shall be in accordance with the classification of defects and acceptable quality levels (AQL's) for general requirements shown in Table II of AA-O-00240 and for specific requirements in Table III shown herein. The lot size shall be expressed in units of tables for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for the examination shall be one complete table.

TABLE III. Classification of defects

Examine	Defect	Classification Major	Classification Minor
End panel	Components less than minimum gages specified.	X	
	Sharp edges at bottom	X	
	Height adjustment wrong type		X
	Holes for attachment of back panel not properly aligned		X

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification Major	Minor
Back panel	Edges not properly formed		
	Not located as specified		X
Height adjustment mechanism	Not continuous adjustment over full range		
	Not finished as specified		
	Not operable by hand		X
	Not closed tube		
Filler strip (2-level top)	Cut-out not properly located		
	Cover plate missing		
	Filler strip not continuous along four edges of top		X
Stationery compartment	Components less than minimum gages specified	X	
	Top and bottom edges not flanged		
	Interior frame not as specified		X
	Bottom not reinforced as specified		
	Flush linings not pierced as specified		
	Holes for attachment of back panel not properly aligned		X
	Holes not size specified		
	Excessive number of holes		
Stationery compartment shelves	Less than number specified		X
	Less than minimum gage specified		
	Outer edges sharp or rough	X	
Leg	Not finished as specified		X
	Less than minimum gage specified	X	
Pedestal	Components less than minimum gages specified	X	
	Top and bottom edges not flanged		
	Interior frame not as specified		X
	Holes for attachment of back panel not properly aligned		
	Holes not size specified		
	Excessive number of holes		X
	Holes for self topping screws not extruded		
Drawer pulls	Not according to design		
	Not secured with solid nuts and lockwashers		X
	Rough or sharp edges	X	
Drawers	Drawer front does not fit square in opening		X
	Components less than minimum gages specified	X	
	Not flanged, channeled, folded or beaded as specified		X
	Letter drawer does not provide for hanging files	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects (con.)

Examine	Defect	Classification: Major	Minor
Drawer suspensions	Less than minimum gages specified Has rough or sharp edges affecting serviceability	X	
	Finish not as specified		X
	Suspensions not rigidly secured to drawer side or pedestal Roller and ball bearings not as specified	X	
Drawer stops	Do not prevent drawer from falling out	X	
	Not equipped with bumpers		X
Compressor	Does not operate smoothly Will not hold firmly in place		X
	Rough or sharp edges that may cause injury	X	
Hanging file supports	Will not accommodate hanging folders	X	
	Not located as specified Partition not maintained in vertical position		X
Workmanship	Legs not securely attached Pedestal not securely attached to top End panel not securely attached to top		X

4.2.2.2 Dimensional examination. Inspection will be made of tables for compliance with dimensions specified including thickness of metal and film thickness of enamel. Any dimensions not within tolerance specified shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The inspection levels and the acceptable quality levels (AQL's) expressed in defects per hundred units, shall be in accordance with MIL-STD-105, and shall be as follows:

	Inspection Levels	AQL's
For examination in Table III major	I	4.0
For examination in Table III total	I	10.0
For examination in 4.2.2.2 (one class)	I	4.0

4.3 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the packaging, packing and marking comply with the requirements in section 5 of this specification. Defects shall be scored in accordance with table IV. For examination of interior packaging, the sample unit shall be one shipping container fully prepared for delivery, selected at random just prior to the closing operations. Sampling shall be in accordnace with MIL-STD-105. Defects of closure listed in Table IV shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; improper size, location, sequence, or method of application.
Materials	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate securing of drawers and doors, contents and padding of perimeter edges. Incomplete closure of container flaps, loose strapping, distortion of container.

4.4 Tests. Tests specified in 4.5.1, 4.5.2, 4.5.3, 4.5.4, 4.5.5, 4.5.6, 4.5.7, 4.5.8, 4.5.9, 4.5.10, 4.5.11, 4.5.14 and 4.5.15 of AA-O-00240 shall apply.

5. PREPARATION FOR DELIVERY

5.1 Setting of height adjustment. Prior to disassembly and packaging the tables shall have the height adjustment set to a 29 inch height.

5.2 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Style A, class 1 or 2 - Clerical table. Each style A, class 1 or 2 table shall be disassembled by removing the back panel when applicable, the end panels and the top. The back panel, the end panels and top shall be slip-sheeted and packaged together with a minimum of 40 pound paper conforming to UU-P-268, grade F. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.2.1.2 Style B, size 1, class 1, 2 or 3, unit a or b. Secretarial table.

5.2.1.2.1 Size 1.

5.2.1.2.1.1 Class 1. Each class 1 table shall be packaged as specified in 5.2.1.1.

5.2.1.2.1.2 Class 2. Each class 2 table shall be disassembled by removing the side panel, back panel and pedestal from the top. The side and back panels and table top shall be slip-sheeted and packaged together as specified 5.2.1.1. The adjustable shelves in the pedestal shall be secured in place with fiberboard inserts, or removed from the pedestal and slip-sheeted with paper as specified in 5.2.1.1. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.2.1.2.1.3 Class 3. Each class 3 table shall be disassembled by removing the end panel, back panel and pedestal from the top. The end and back panels and table top shall be slip-sheeted and packaged together as specified in 5.2.1.1. The top of the filing storage unit shall be secured to the pedestal with tape. The receding door and the storage drawer shall be secured with tape conforming to PPP-T-97 applied over the edges of the door and drawer frame. The drawer pulls shall be covered with paper conforming to PPP-P-291 and secured with tape. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

5.2.1.2.2 Style B, size 2, class 1 - Secretarial table.

5.2.1.2.2.1 Size 2, class 1. Each size 2, class 1 table shall be disassembled by removing the end panel, back panel and pedestal from the top. The end and back panels and table top shall be slip-sheeted and packaged together as specified in 5.2.1.1. All drawers in the pedestal shall be cushioned with material conforming to PPP-C-843. The cushioning material shall be wedged between the drawer and drawer frame. The drawers shall be closed and secured with tape conforming to PPP-T-97 applied over the edges of the drawers and drawer frame. The drawer pulls shall be covered with paper conforming to PPP-P-291 and secured with tape. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.2.1.3 Style C, class 1 or 2 - Filing table. The style C, class 1 or 2 table shall be disassembled by removing the end and back panels and pedestal from the top. The end panel and back panel shall be slip-sheeted and packaged as specified in 5.2.1.1. All drawers in the pedestal shall be cushioned with material conforming to PPP-C-843. The cushioning material shall be wedged between the drawer and drawer frame. The drawers shall be closed and secured with tape conforming to PPP-T-97 applied over the edges of the drawers and drawer frame. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.2.1.4 Style D, class 1 or 2 - Interview table.

5.2.1.4.1 Class 1. The class 1 table shall be disassembled by removing the back and end panels from the top. The back panel, top and end panels shall be slip-sheeted and packaged together with a minimum of 40 pound paper conforming to UU-P-268, Grade B. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.2.1.4.2 Class 2. The class 2 table shall be disassembled by removing the back panel, end panel and pedestal from the top. The back panel, end panel and top shall be slip-sheeted together as specified in 5.2.1.1. All drawers in the pedestal shall be cushioned with material conforming to PPP-C-843. The cushioning material shall be wedged between the drawer and the drawer frame. The drawers shall be closed and secured with tape conforming to PPP-T-97 applied over the edges of the drawers and drawer frame. Loose hardware required to reassemble the table shall be packaged in a bag. The bag shall be closed or sealed.

5.3 Packing. Packing shall be level A B or C as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 Style A, class 1 or 2 - Clerical table. Each complete style A, class 1 or 2 table shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts. The fiberboard shall meet the requirements specified in PPP-F-320. The box shall be closed, waterproofed sealed and strapped in accordance with the appendix to the box specification.

5.3.1.2 Style B, size 1, class 1, 2 or 3, unit a or b - Secretarial table. The side panel, back panel, table top, and loose hardware shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts. The pedestal shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Fiberboard inserts or pads shall be utilized as cushioning. The fiberboard shall meet the requirements of PPP-F-320. The boxes shall be closed, waterproofed, sealed and strapped in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.3.1.3 Style B, size 2, class 1 - Secretarial table. The end panel, back panel, table top and loose hardware shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts. The pedestal shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Fiberboard inserts or pads shall be utilized as cushioning with the fiberboard meeting the requirements as specified in PPP-F-320. The boxes shall be closed, waterproofed, sealed and strapped in accordance with the appendix to the box specification.

5.3.1.4 Style C, class 1 or 2 - Filing table. The side panel, back panel, table top and loose hardware shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts. The pedestal shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Fiberboard inserts or pads shall be utilized as cushioning with the fiberboard meeting the requirements specified in PPP-F-320. The boxes shall be closed, waterproofed, sealed and strapped in accordance with the appendix to the box specification.

5.3.1.5 Style D, class 1 or 2 - Interview table.

5.3.1.5.1 Class 1. The class 1 table shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts. The fiberboard shall meet the requirements as specified in PPP-F-320. The box shall be closed, water proofed, sealed and strapped in accordance with the appendix to the box specification.

5.3.1.5.2 Class 2. The back panel, end panel, table top and loose hardware shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant, style FPF. Contents shall be immobilized within the container as required with fiberboard inserts, the pedestal shall be packed in a close-fitting box conforming to PPP-B-636, class weather-resistant. Fiberboard inserts or pads shall be utilized as cushioning with the fiberboard meeting the requirements as specified in PPP-F-320. The boxes shall be closed, waterproofed, sealed and strapped in accordance with the appendix to the box specification.

5.3.2 Level B. The tables shall be packed as specified in 5.3.1, except the containers shall be class domestic and waterproofing of the container shall not be required. In addition the style FPF shipping containers shall be tape bounded in accordance with the appendix of the box specification.

5.3.3 Level C. The tables shall be packed to insure carrier acceptance and safe delivery at destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.4 Marking.

5.4.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.4.2 Military activities. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The L-unit desk attachments are designed for use with L-unit desks to form an "L" shaped work station. The height of the L-unit desk attachments and the L-unit desks is adjustable from 29 inches to 30-1/2 inches. The position of end panels and pedestals can be reversed in the field. Additional holes are provided in the end panels and pedestals for this purpose. L-unit desk attachments should be selected to perform specific work tasks. Clerical tables are intended for general clerical use and for occasional typing or office machine operation. Secretarial tables have tops with two levels and are intended for full-time typing or machine operation. The lower top height corresponds to that of the typewriter platform of the standard

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

general office desk. The interview table provides a work station when interviewing and conference type work constitutes the major activity and provides the facility of desk and table in space formerly required for desk alone. The filing tables with integral filing cabinets provide additional working top area and additional drawer space.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(a) Title, symbol and date of this specification.
(b) Styles and classes required (see 1.2.1).
(c) Whether preproduction sample is required (see 3.1).
(d) Whether plastic tops are required (see Table II, 3.3.8.4).
(e) Whether hanging file supports are required for Style C filing table (see 3.3.16.5.9 or 3.3.15.3.1).
(f) Whether hanging file supports are required for Style D interview table (see 3.3.16.5.9 or 3.3.15.3.1).
(g) Whether alternate drawer arrangement is required for Style C filing table (see 3.3.16.6).
(h) Whether drawer pedestal is required for Style D interview table (see 3.3.17.4).
(i) Levels of packaging required (see 5.2 and 5.3).
(j) Selection of applicable levels of packing (see 5.3).
(k) Marking requirements (see 5.4).

For civil agency procurements. When level B packaging is required for civil agency procurements, the requirements in 5.2.1, level A packaging shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

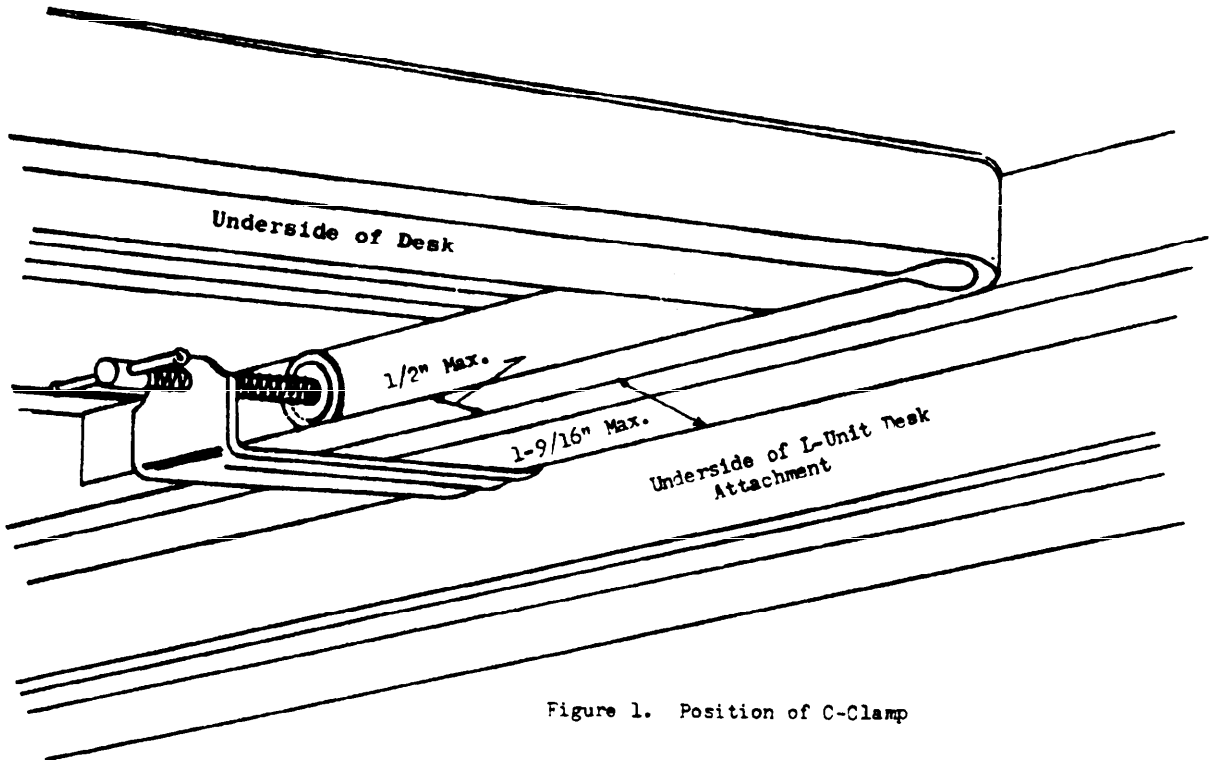


Figure 1. Position of C-Clamp

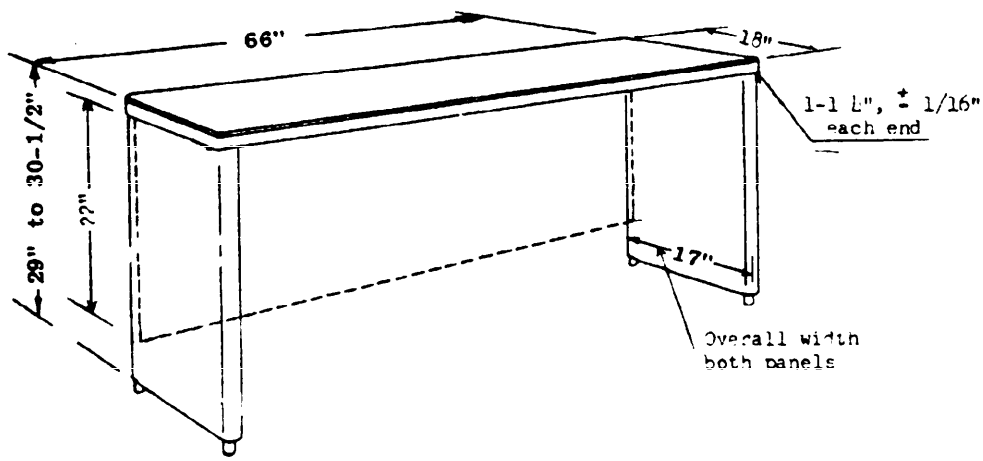


Figure 2. Style A Clerical table
Class 1 without back panel
Class 2 With back panel

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

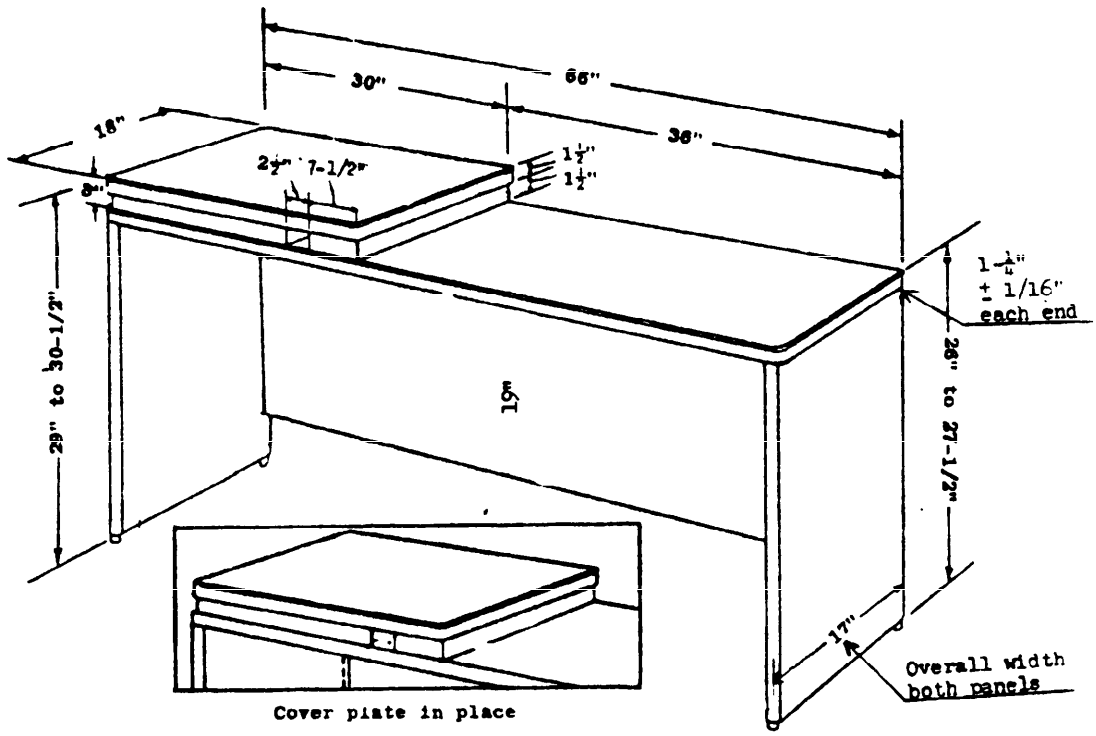


Figure 3. Style B, Secretarial Table
Size 1, 66 by 18 inches
Class 1, Without stationery compartment

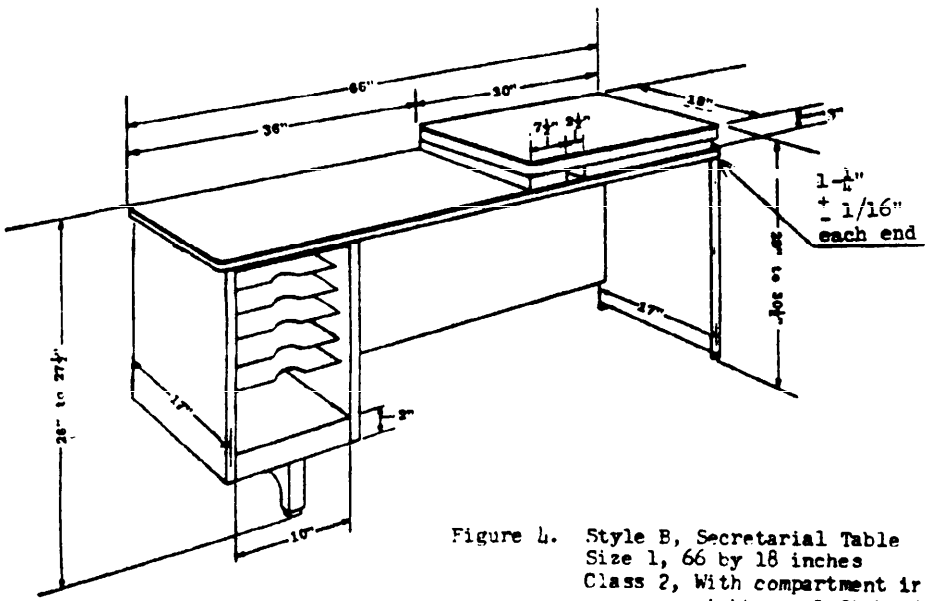


Figure 4. Style B, Secretarial Table
Size 1, 66 by 18 inches
Class 2, With compartment in right- or left-hand pedestal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

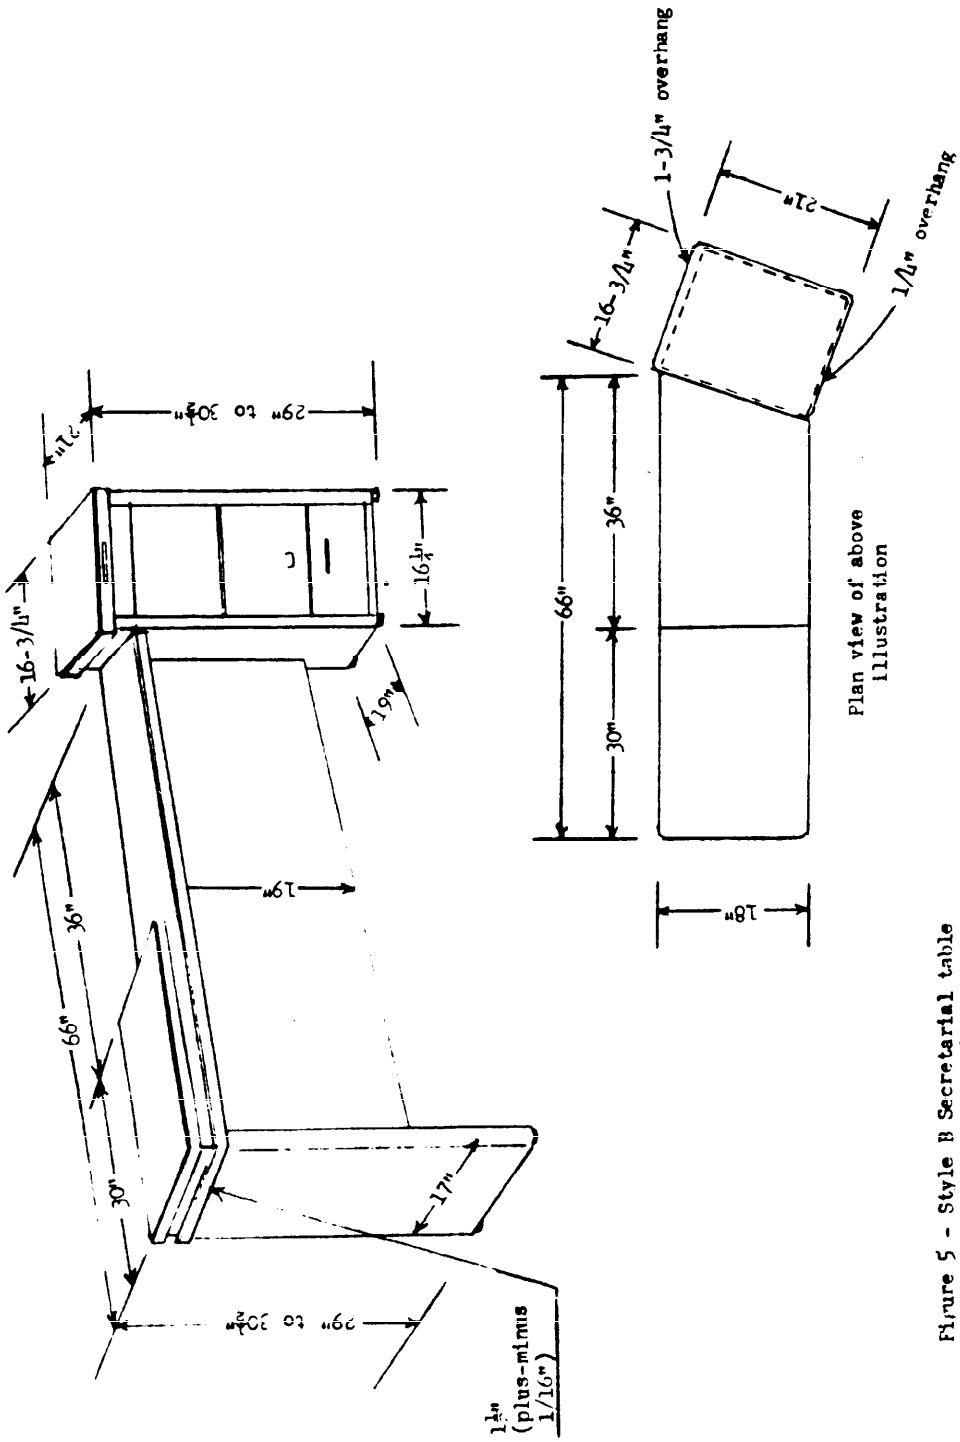


Figure 5 - Style B Secretarial table
Size 1 66 by 18 inches
Class 3 With angled filing-storage unit
Unit a Single right pedestal

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

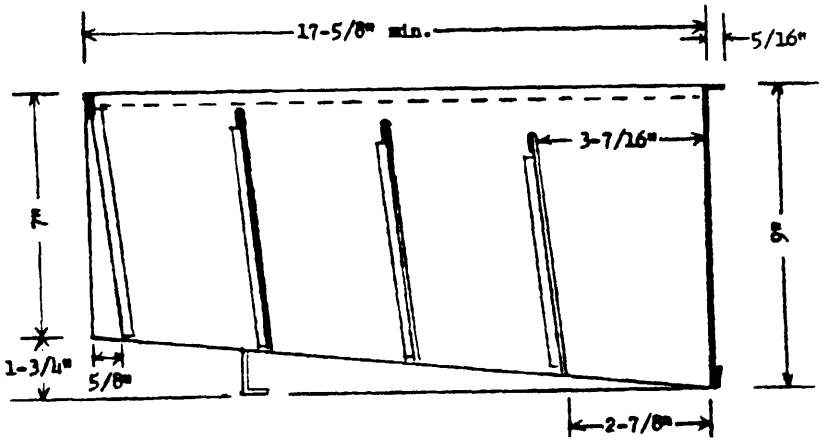


Figure 6. Vertical Filing Insert

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Pedestal contains:

	Minimum inside clear dimensions:
1 letter drawer	12" W x 10-1/2" H x 15-1/4" D
1 storage drawer	12" W x 4-7/8" H x 15-1/4" D

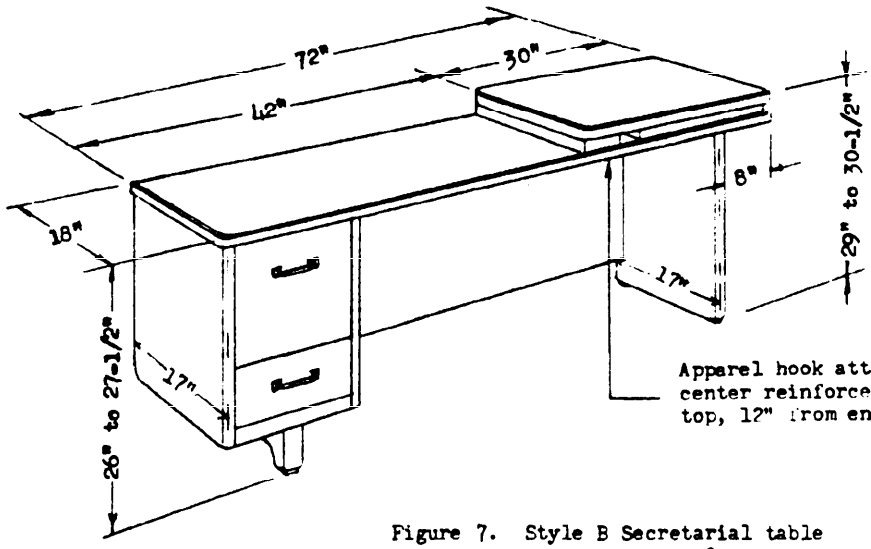


Figure 7. Style B Secretarial table
Size 2, 72 by 18 inches
Class 1, with drawer compartment in right or left pedestal

Pedestal contains:

	Minimum inside clear dimensions
2 storage drawers	12" W x 4-7/8" H x 15-1/4" D
1 letter drawer	12" W x 10-1/2" H x 15-1/4" D

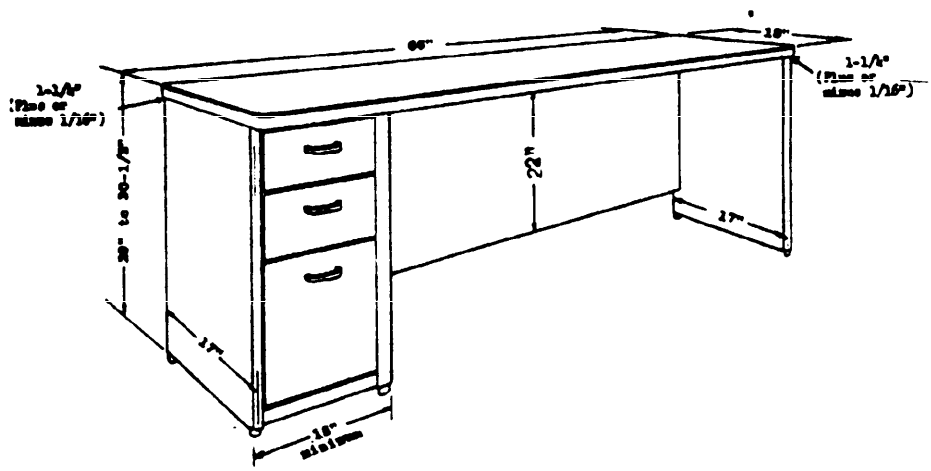


Figure 8. Style C Filing table
Class 1, with pedestal containing 1 letter and 2 storage drawers in right or left pedestal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Pedestal contains:

	Minimum inside clear dimensions:
2 letter drawers	12" W x 10-1/2" H x 15-1/4" D

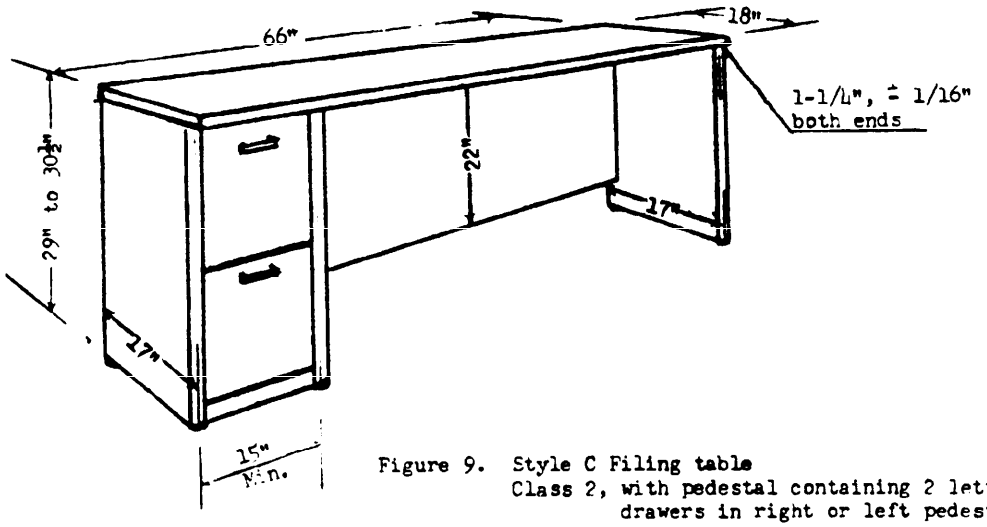


Figure 9. Style C Filing table
Class 2, with pedestal containing 2 letter drawers in right or left pedestal.

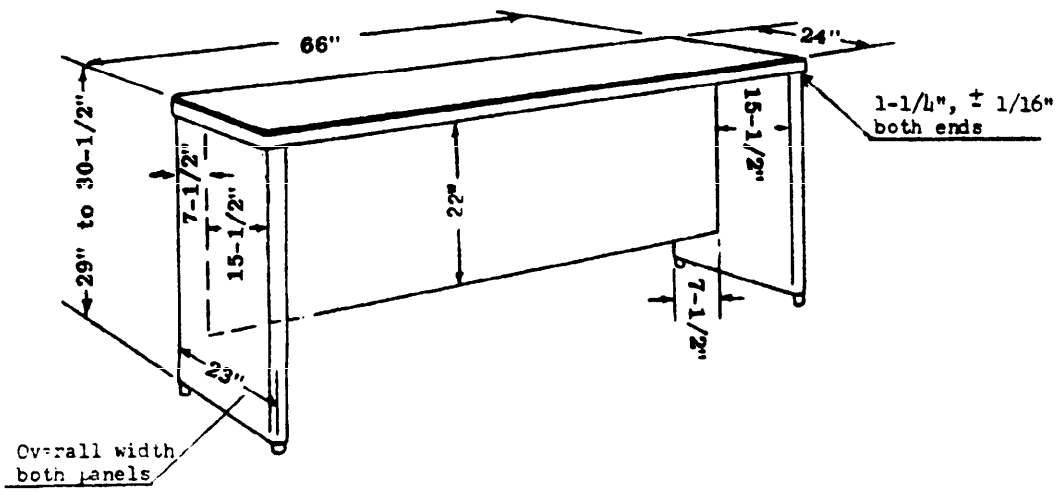


Figure 10. Style D Interview table
Size 1, 66 by 24 inches
Class 1, without drawer pedestal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Pedestal contains:

	Minimum inside clear dimensions:
2 letter drawers	12" W x 10-1/2" H x 15-1/4" D

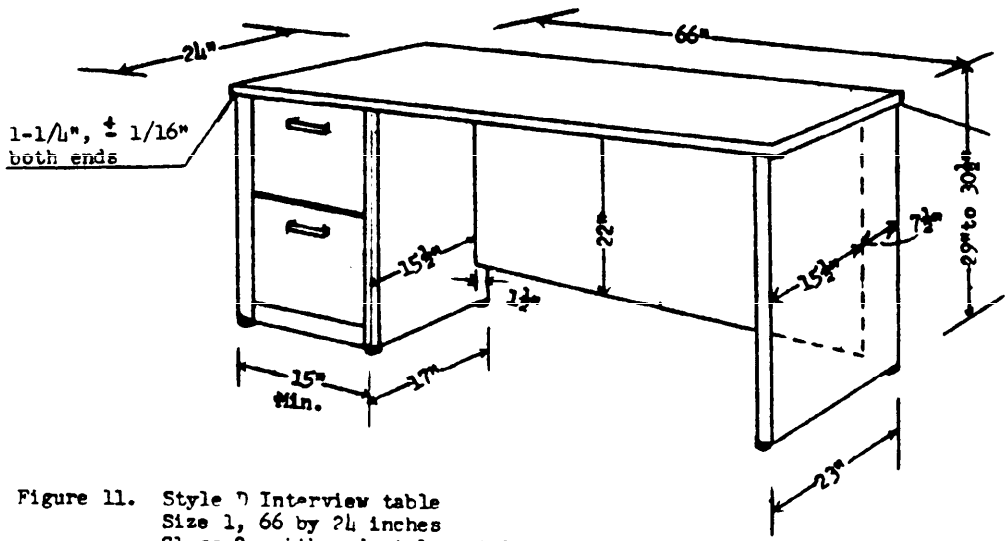


Figure 11. Style D Interview table
Size 1, 66 by 24 inches
Class 2, with pedestal containing 2 letter drawers in right or left pedestal.

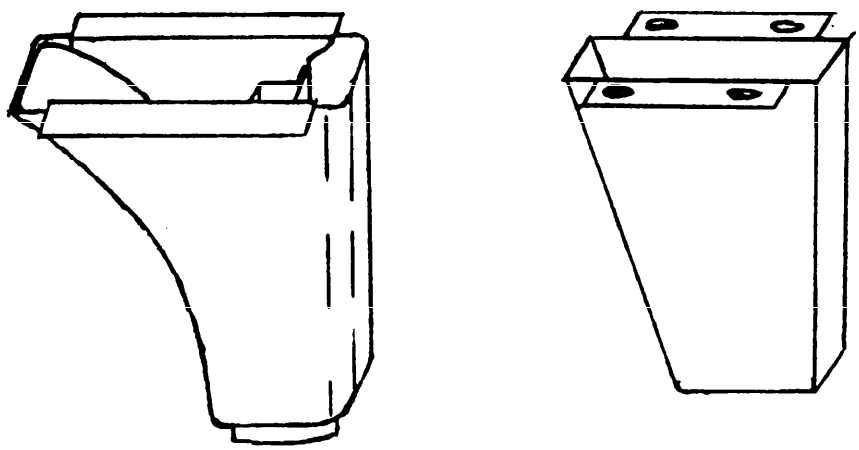


Figure 12. Alternate leg designs
Style B Secretarial table
Class 2 and Class 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

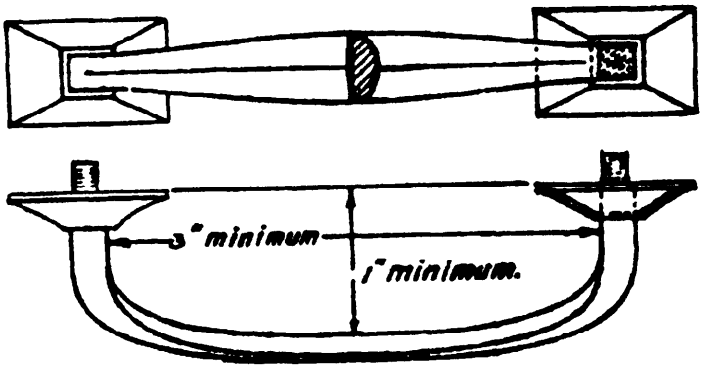


Figure 13. Drawer pull

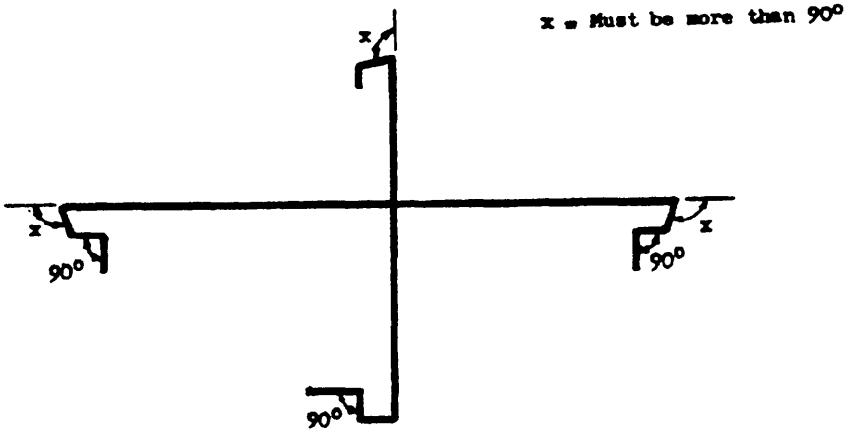


Figure 14. Outside drawer front
Horizontal and vertical sections

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF), Wash., D. C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-O-00240/2C(GSA-FSS) Desk Attachments, L-Unit, Tables, Steel, Unitized

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 68 2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.