
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, EXTRACTOR, MODULE, SINGLE SPAN STYLES I AND II

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the extractors described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

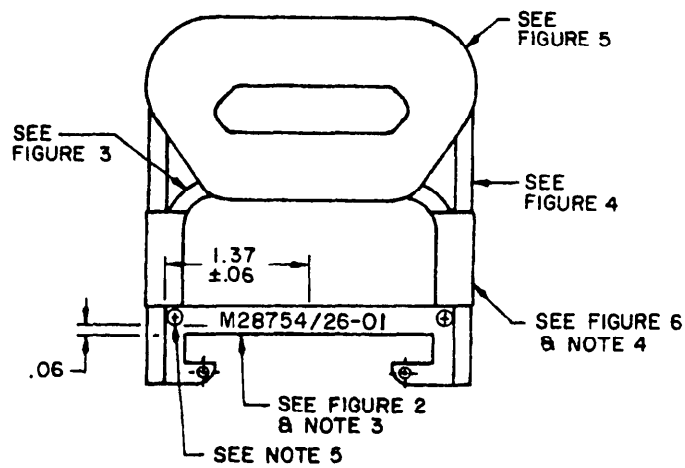

INCHES	MM
.005	.13
.01	.3
.06	1.5
.12	3.0
1.37	34.8


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking per MIL-C-28754, .12 inch high, Gothic or Futura characters, black.
4. Shrink to provide a slip-fit assembly.
5. Ⓐ Screw part number MS51957-2, two places.
6. Ⓐ Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.


FIGURE 1. Module extractor type 1A.

Ⓐ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

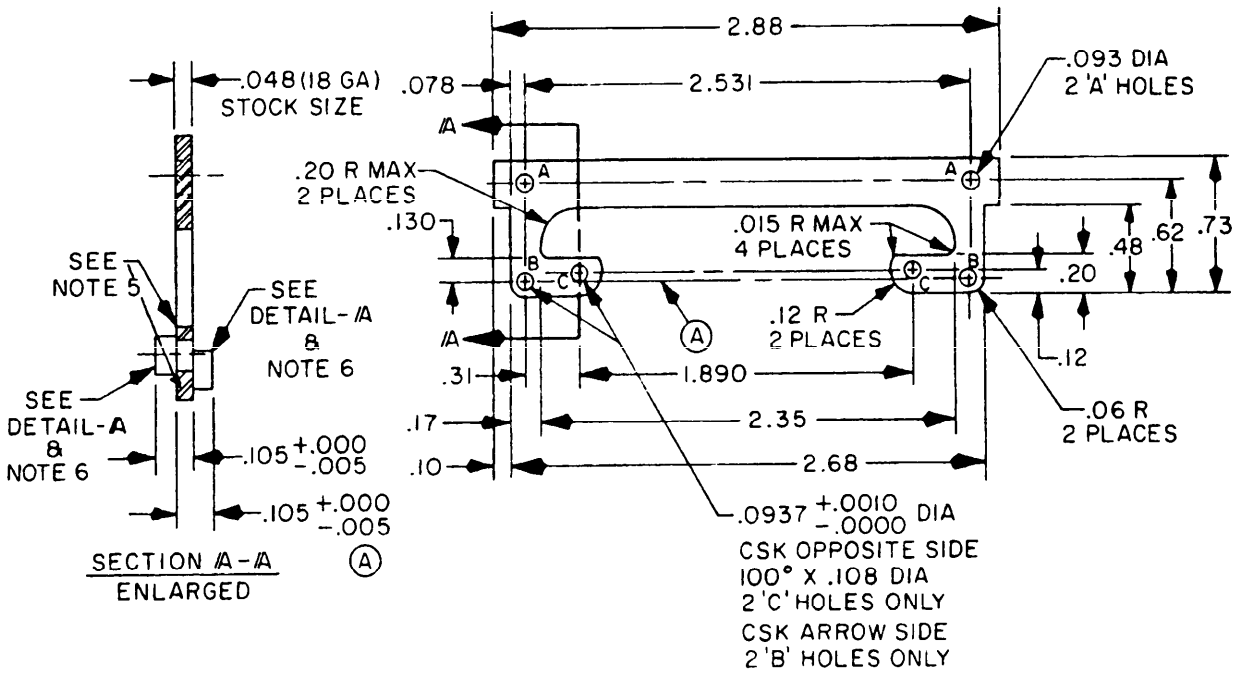

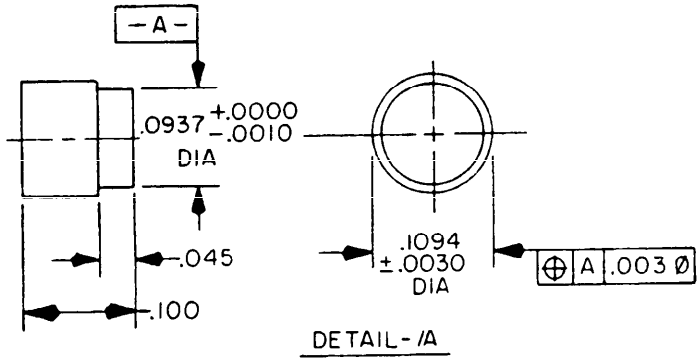


INCHES	MM	INCHES	MM
.0010	.025	.1094	2.779
.0030	.076	.12	3.0
.005	.13	.130	3.30
.01	.3	.17	4.3
.015	.38	.20	5.1
.045	1.14	.31	7.9
.048	1.22	.48	12.2
.06	1.5	.62	15.7
.078	1.98	.73	18.5
.093	2.36	1.890	48.01
.0937	2.378	2.35	59.7
.100	2.54	2.531	64.29
.105	2.67	2.68	68.1
.108	2.74	2.88	73.2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Material: Steel, low carbon, per QQ-S-698, CRCQ, Finish No. 1.
4. Finish: Cadmium plate per QQ-P-416, CL 2, type II, after assembly.
5. Braze per MIL-B-7883 with BRZG ALY. AG, QQ-B-654, GR IV.
6. Material: Detail A steel, tool, drill rod, per QQ-T-580, CLWI-12.
Ⓐ 7. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 2. Plate puller.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T14:38Z
Check the source to verify that this is the currentversion before use.

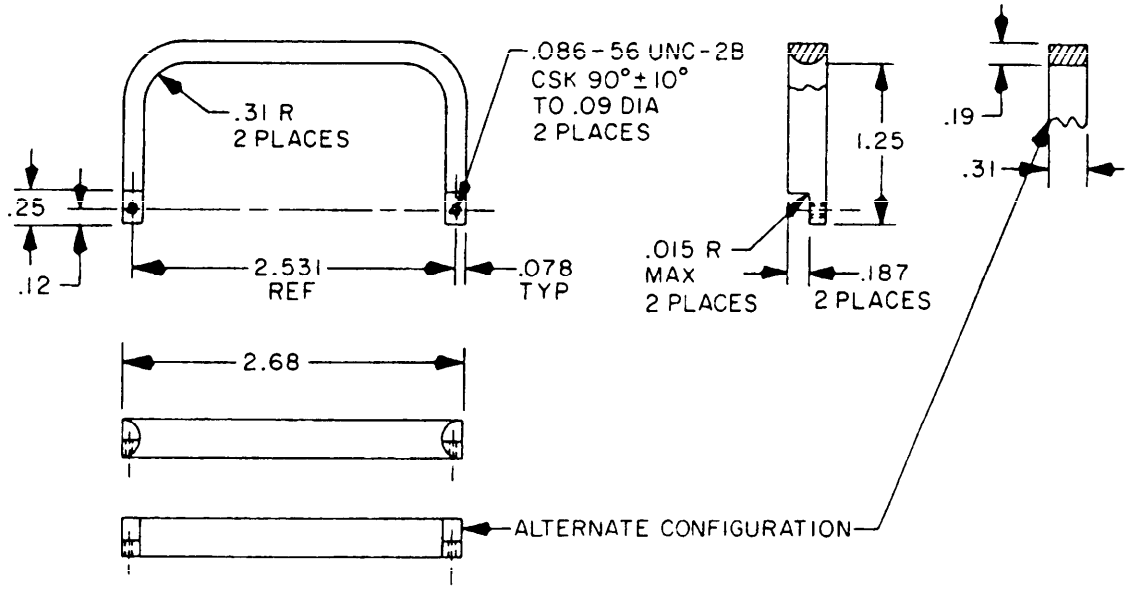


INCHES	MM
.005	.13
.01	.3
.015	.38
.078	1.98
.086	2.18
.09	2.3
.12	3.0
.187	4.75
.19	4.8
.25	6.4
.31	7.9
1.25	31.8
2.531	64.29
2.68	68.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimension limits apply before plating.
4. Material: .31 diameter, half round, low carbon steel, per QQ-S-634 or .31 x .19 flat wire, low carbon steel, per QQ-S-634.
5. Finish: Cadmium plate per QQ-P-416, CL 2, type II.
Ⓐ 6. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 3. Slide.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T14:38Z
Check the source to verify that this is the currentversion before use.

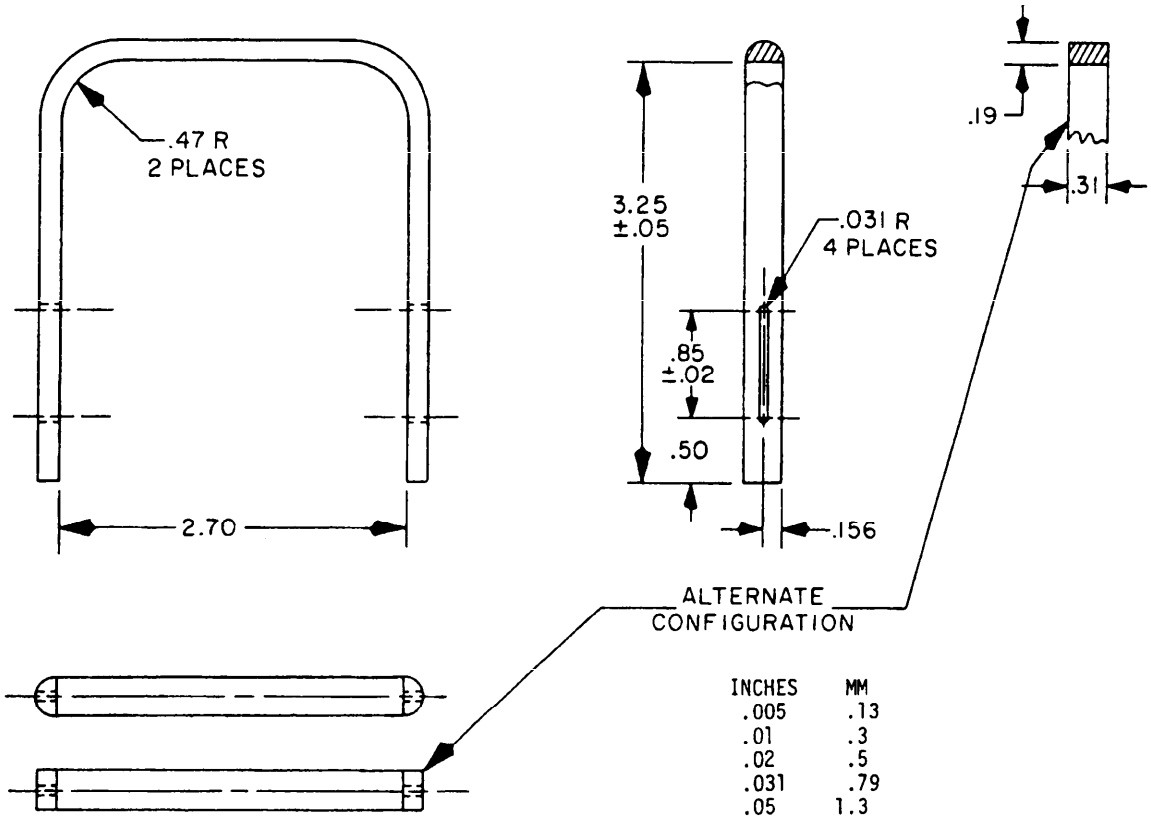


INCHES	MM
.005	.13
.01	.3
.02	.5
.031	.79
.05	1.3
.156	3.96
.19	4.8
.31	7.9
.47	11.9
.50	12.7
.85	21.6
2.70	68.6
3.25	82.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Dimension limits apply before plating.
4. Material: .31 diameter, half round, low carbon steel, per QQ-S-634 or .31 x .19 flat wire, low carbon steel, per QQ-S-634.
5. Finish: Cadmium plate per QQ-P-416, CL 2, type II.
Ⓐ 6. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 4. Handle.


Source: https://assist.dla.mil -- Downloaded: 2026l0-20T14:38Z
Check the source to verify that this is the currentversion before use.

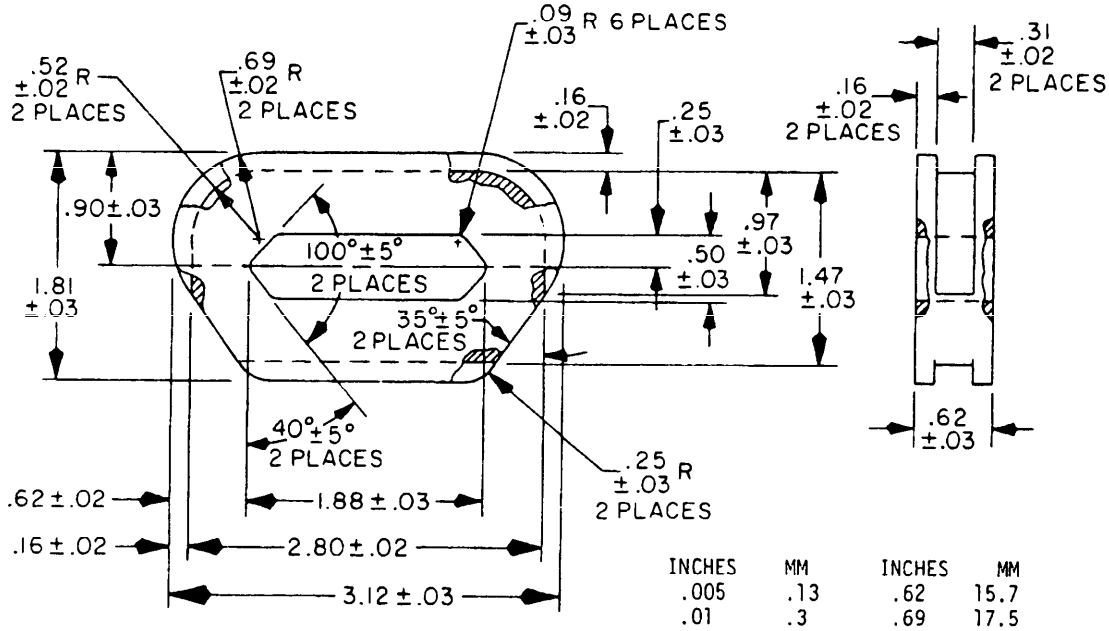

INCHES	MM	INCHES	MM
.005	.13	.62	15.7
.01	.3	.69	17.5
.02	.5	.90	22.9
.03	.8	.97	24.6
.09	2.3	1.47	37.3
.16	4.1	1.81	46.0
.25	6.4	1.88	47.8
.31	7.9	2.80	71.1
.50	12.7	3.12	79.2
.52	13.2		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Material: Rubber, cellular, synthetic per MIL-R-6130, type II, grade A, condition firm.
Ⓐ 4. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 5. Cushion insert.

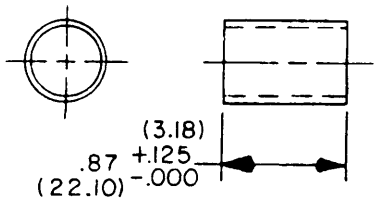

As supplied	After unrestricted shrinkage	
Inside Dia. Min.	Inside Dia. Max.	Wall thickness
Class 1 .500 (12.70)	.250 (6.35)	.034 ±.005 (.86) (.13)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Material: Insulation sleeving per MIL-I-23053/3, class 1, color optional.
4. Metric equivalents are in parentheses.
Ⓐ 5. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 6. Sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 6.

Material: See figures 2 through 6.

Ⓐ Marking: In accordance with MIL-C-28754 and figure 1.

Miliary part number: M28754/26-01.

Supersession data: This specification includes the requirements of drawing number 0102-695, code identification number 28687.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-26)

Source: https://assist.dla.mil -- Downloaded: 202610-20T14:38Z
Check the source to verify that this is the current version before use.