

MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, 100 PIN, DOUBLE SPAN, CONTACT TAILS ON .050 CENTERS

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for acquiring the connector described herein shall consist of this specification and the latest issue of MIL-C-28754.

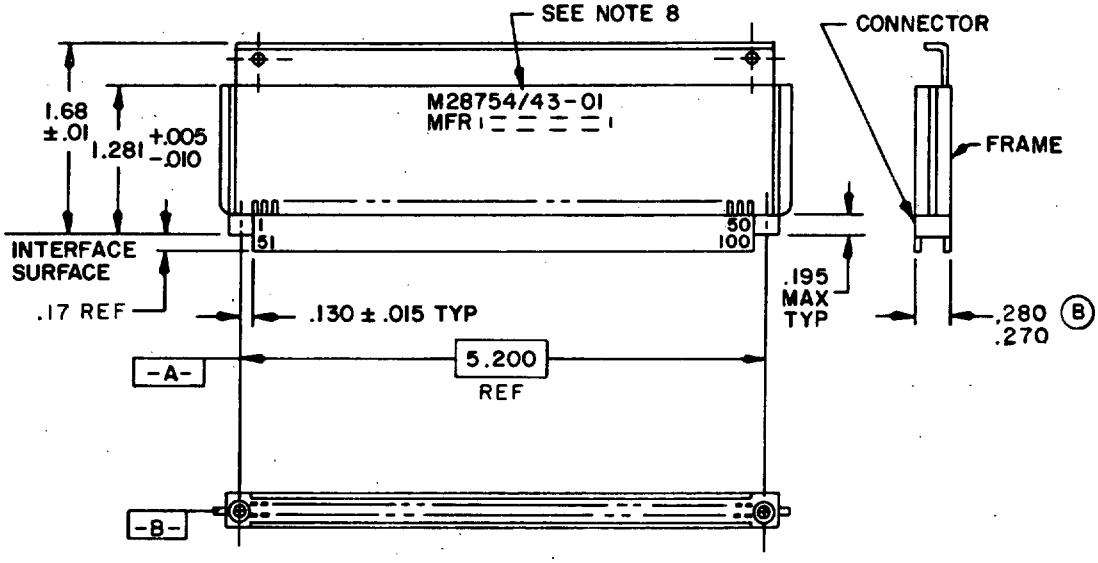





OPTIONAL CONFIGURATION

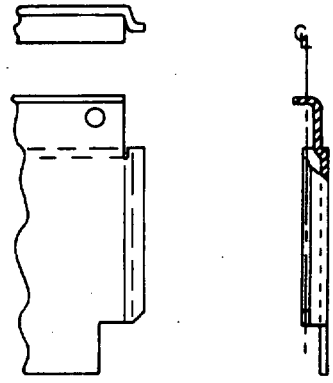

OPTIONAL CONFIGURATION OF ITEM I

VIEW A


INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.085	2.16	.17	4.3	1.281	32.54	5.32	135.1
.010	.25	.100	2.54	.195	4.95	1.286	32.66	5.440	138.18
.015	.38	.12	3.0	.200	5.08	1.68	42.7	5.62	142.7
.02	.5	.128	3.25	.270	6.86	4.89	124.2		
.025	.64	.130	3.30	.280	7.11	4.940	125.48		
.050	1.27	.1475	3.746	.400	10.16	5.200	132.08		

FIGURE 1. Dimensions and configurations.

Ⓑ denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:43Z
Check the source to verify that this is the current version before use.

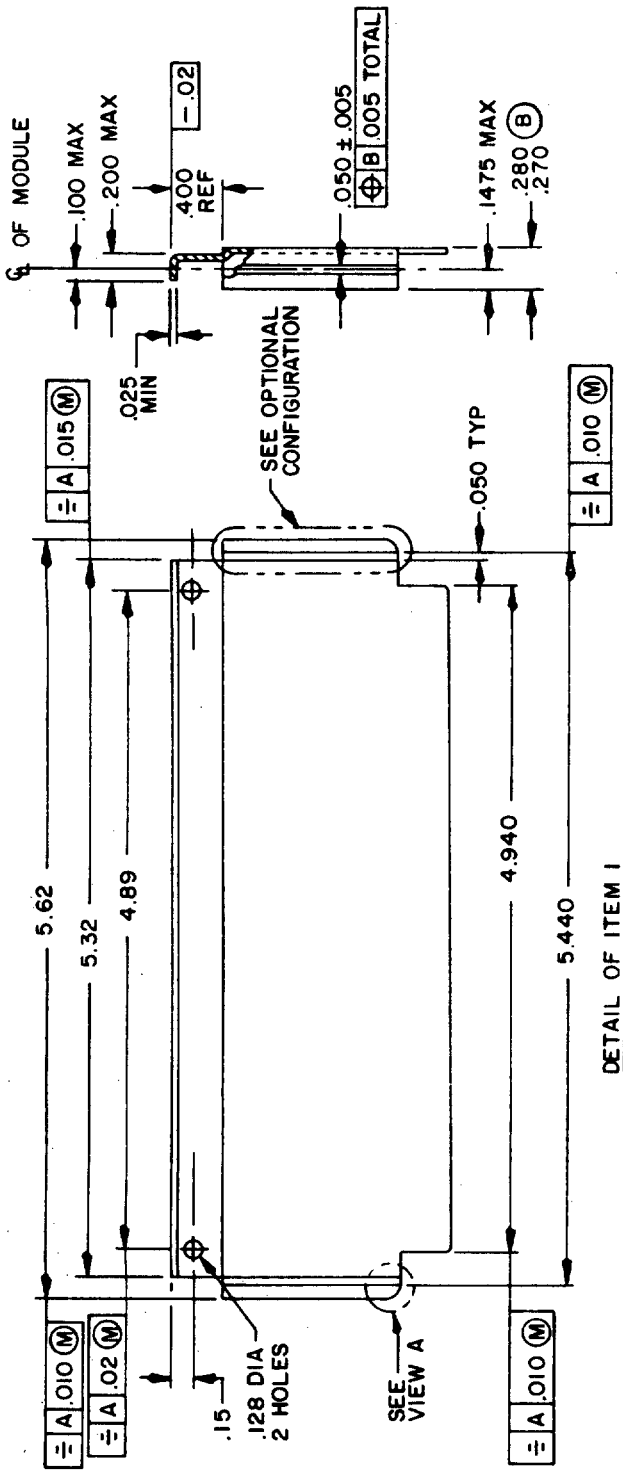

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) on three place decimals, ±.01 (.3 mm) on two place decimals and ±2° on angles.
4. Break sharp edges .03 (.8 mm) maximum.
5. 1.281 $^{+.005}_{-.010}$ dimension applies from the interface surface to the top of the guide rib only.
6. The portion of the module other than the top surface of the guide rib (that is, within the 5.440 dimension) shall be 1.286 maximum.
7. The .1475 maximum indicates the maximum eccentricity allowed on either side of centerline, but not both. The .290 maximum governs.
8. Marking shall be .12 ±.02 inch high white Gothic characters on opposite side of plate. Manufacturer's code identification shall be marked in place of area outlined by phantom lines.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:43Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:

Frame: Aluminum alloy 5052, per QQ-A-250/8, H32 with black anodic coating type III, class 2 per MIL-A-8625.

Pin shield retention: In accordance with MIL-C-28754.

Connector: Use M28754/42-01.

Military part number: M28754/43-01.

Supersession data: Supersedes Naval Electronic Systems Command (28687) drawing number 0102-692.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-38)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

MIL-C-28754/43B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:43Z
Check the source to verify that this is the current version before use.