MIL-C-28754/22G
29 November 1991
SUPERSEDING
MIL-C-28754/22F
7 DECEMBER 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, FRAME, CASTING, TYPE IV, SINGLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the frame described herein shall consist of this specification and the latest issue of MIL-C-28754.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

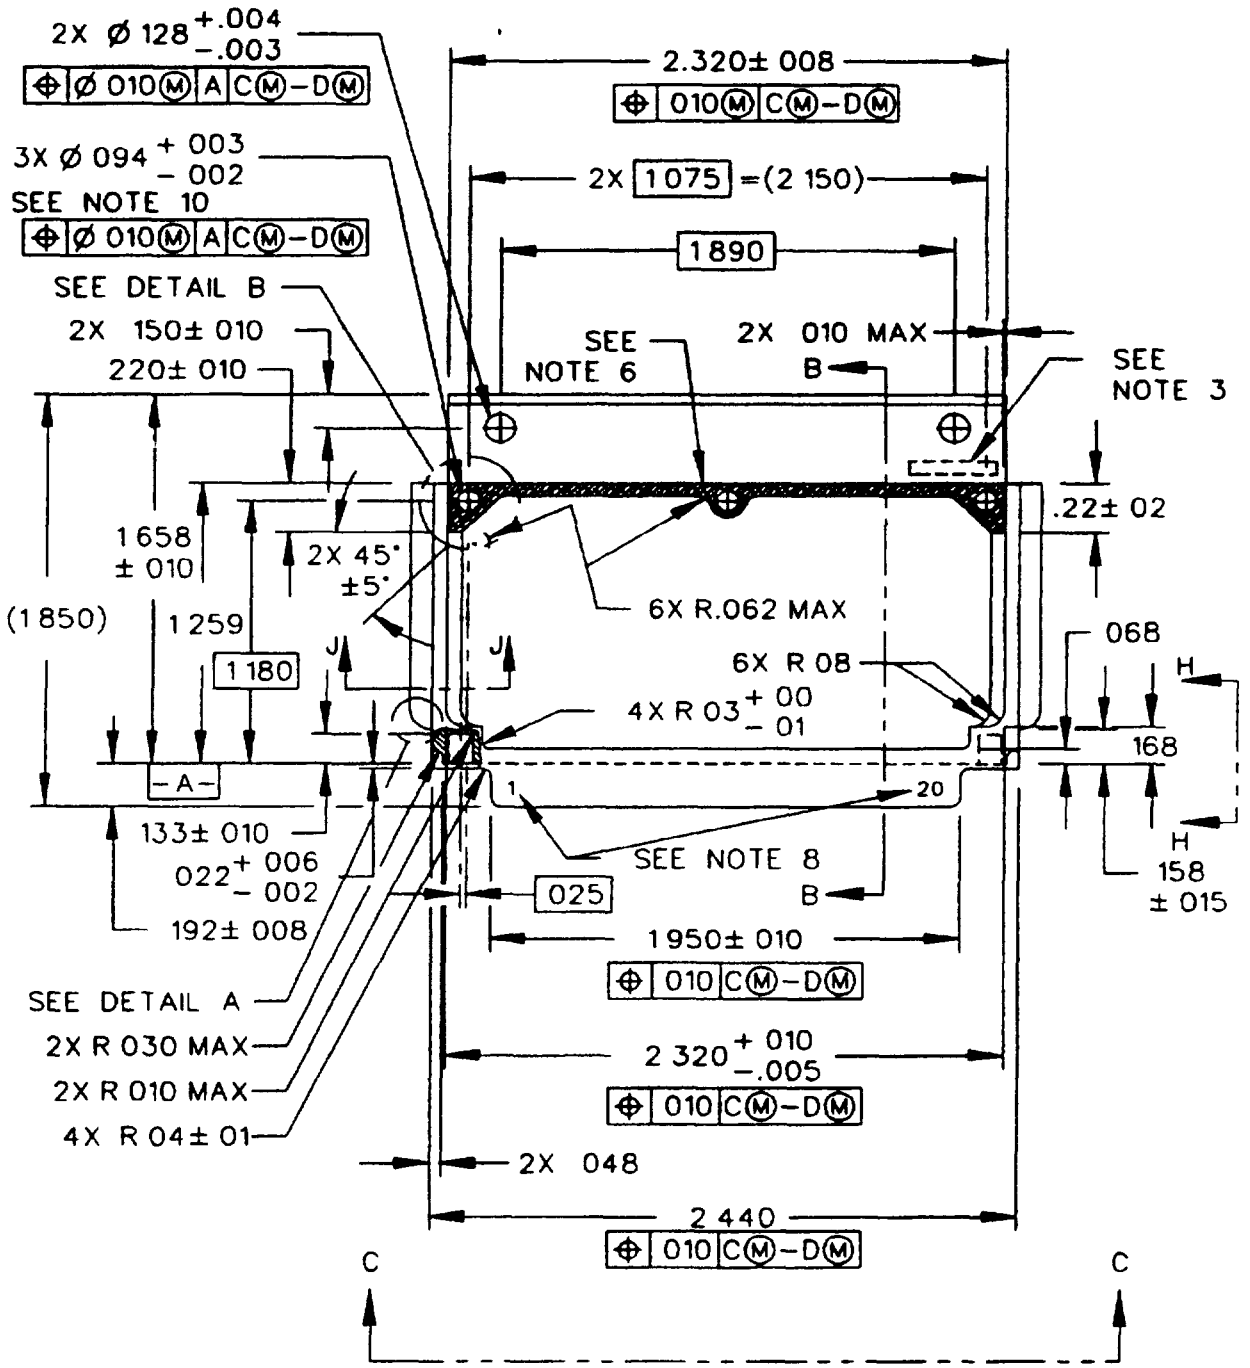


FIGURE 1. Dimensions and configurations. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

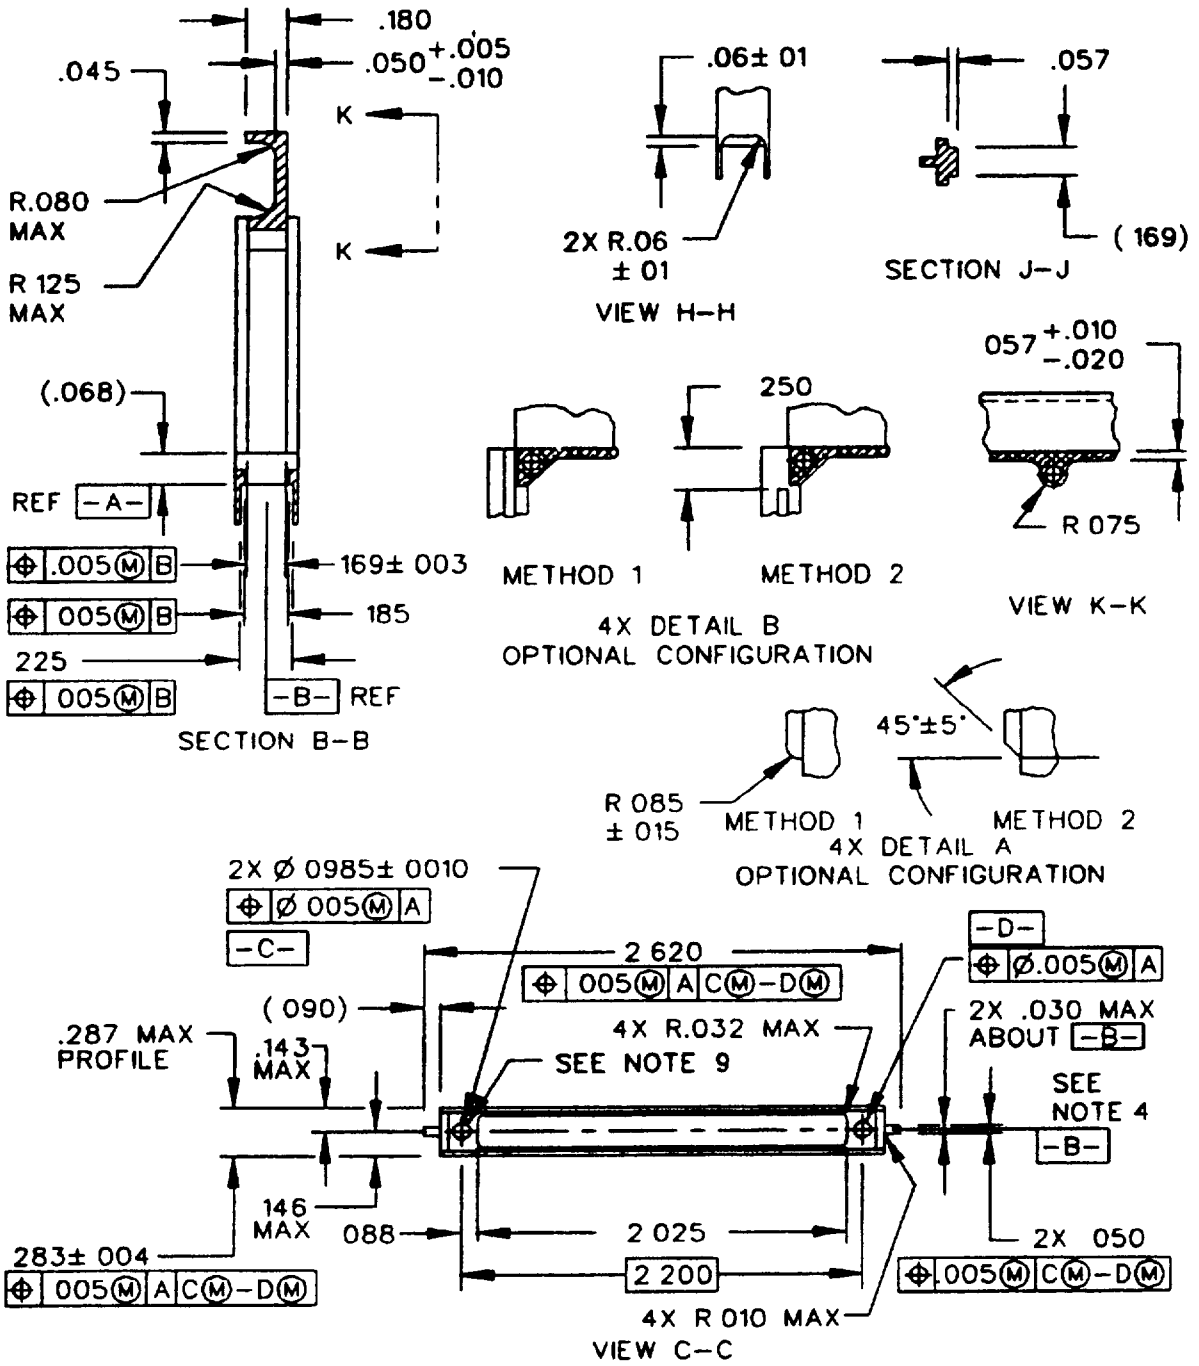


FIGURE 1. Dimensions and configurations - Continued. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0010	0.025	.045	1.14	.128	3.25	1.202	30.53
.002	0.05	.048	1.22	.143	3.63	1.281	32.54
.003	0.08	.050	1.27	.146	3.71	1.680	42.67
.004	0.10	.057	1.45	.150	3.81	1.850	46.99
.005	0.13	.06	1.5	.155	3.94	1.890	48.01
.006	0.15	.062	1.57	.169	4.29	1.950	49.53
.0075	0.190	.075	1.90	.170	4.32	2.025	51.44
.010	0.25	.080	2.03	.180	4.57	2.200	55.88
.015	0.38	.085	2.16	.185	4.70	2.320	58.93
.020	0.51	.087	2.21	.190	4.83	2.440	61.98
.022	0.56	.090	2.29	.220	5.59		
.025	0.64	.094	2.39	.225	5.72		
.030	0.76	.0985	2.502	.250	6.35		
.032	0.81	.110	2.79	.283	7.19		
.04	1.0	.125	3.18	1.075	27.30		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1.0 = 25.4 mm.
3. Mark on this area with white characters or raised cast characters .06 high, raised .01 maximum. No marking but identifying part number.
4. A line passing through the centers of the two .0985 ±.0010 diameter holes establishes -B- .

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

5. All surfaces to have 125 microinch finish unless otherwise specified.

6. Surfaces indicated by  shall be coated with a chemical film on both near and far sides.

7. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

8. Contact numbers 1, 20, 21 and 40 shall be marked on the pin shield in white characters, .06 inch high except as noted in table I.

9. Holes are not drilled through; drill points optional.

10. These 3 holes accommodate insert M28754/41-01 and screw M28754/40-01 which are not furnished with assembly and are applicable to M28754/22-01 through -03 only. For M28754/22-04 there are no holes, and no inserts and screws provided with the assembly.

11. Draft allowances shall remain within specified part tolerances. *

12. All dimensional measurements shall be made with the part in a restrained position. *

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Aluminum alloy, casting, 360 or 380 in accordance with QQ-A-591.

Surface treatment: Anodized parts shall be in accordance with MIL-A-8625, type II, class 2, black except surfaces indicated (see note 6) shall be coated with a chemical film in accordance with MIL-C-5541, class 3. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

Casting: Casting shall not show evidence of flashing or pin ejection marks exceeding above surface.

Marking: In accordance with MIL-C-28754 and figure 1.

Military part number: M28754/22-(dash number from table I).

TABLE I
Dash numbers and characteristics

Dash no	Surface treatment
01	With anodize and chemical film
02	Without anodize, without chemical film, without any marking
03	With anodize, with chemical film, without any marking
04	See note 10.

Supersession data: This specification includes the requirements of drawing number 2316098, code identification number 10001.

QUALIFICATIONS:

Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Extended qualifications: Qualification of M28754/22-01, extends qualifications to other products as specified in the appendix to MIL-C-28754.

The margins of this specification are marked with an asterisk to

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous issue.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity:
Navy - SH

(Project 5935-3813-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.