MIL-C-28754/23F
29 November 1991
SUPERSEDING
MIL-C-28754/23E
7 DECEMBER 1984

MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR ASSEMBLY, TYPE IV, SINGLE SPAN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the frame described herein shall consist of this specification and the latest issue of MIL-C-28754.

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

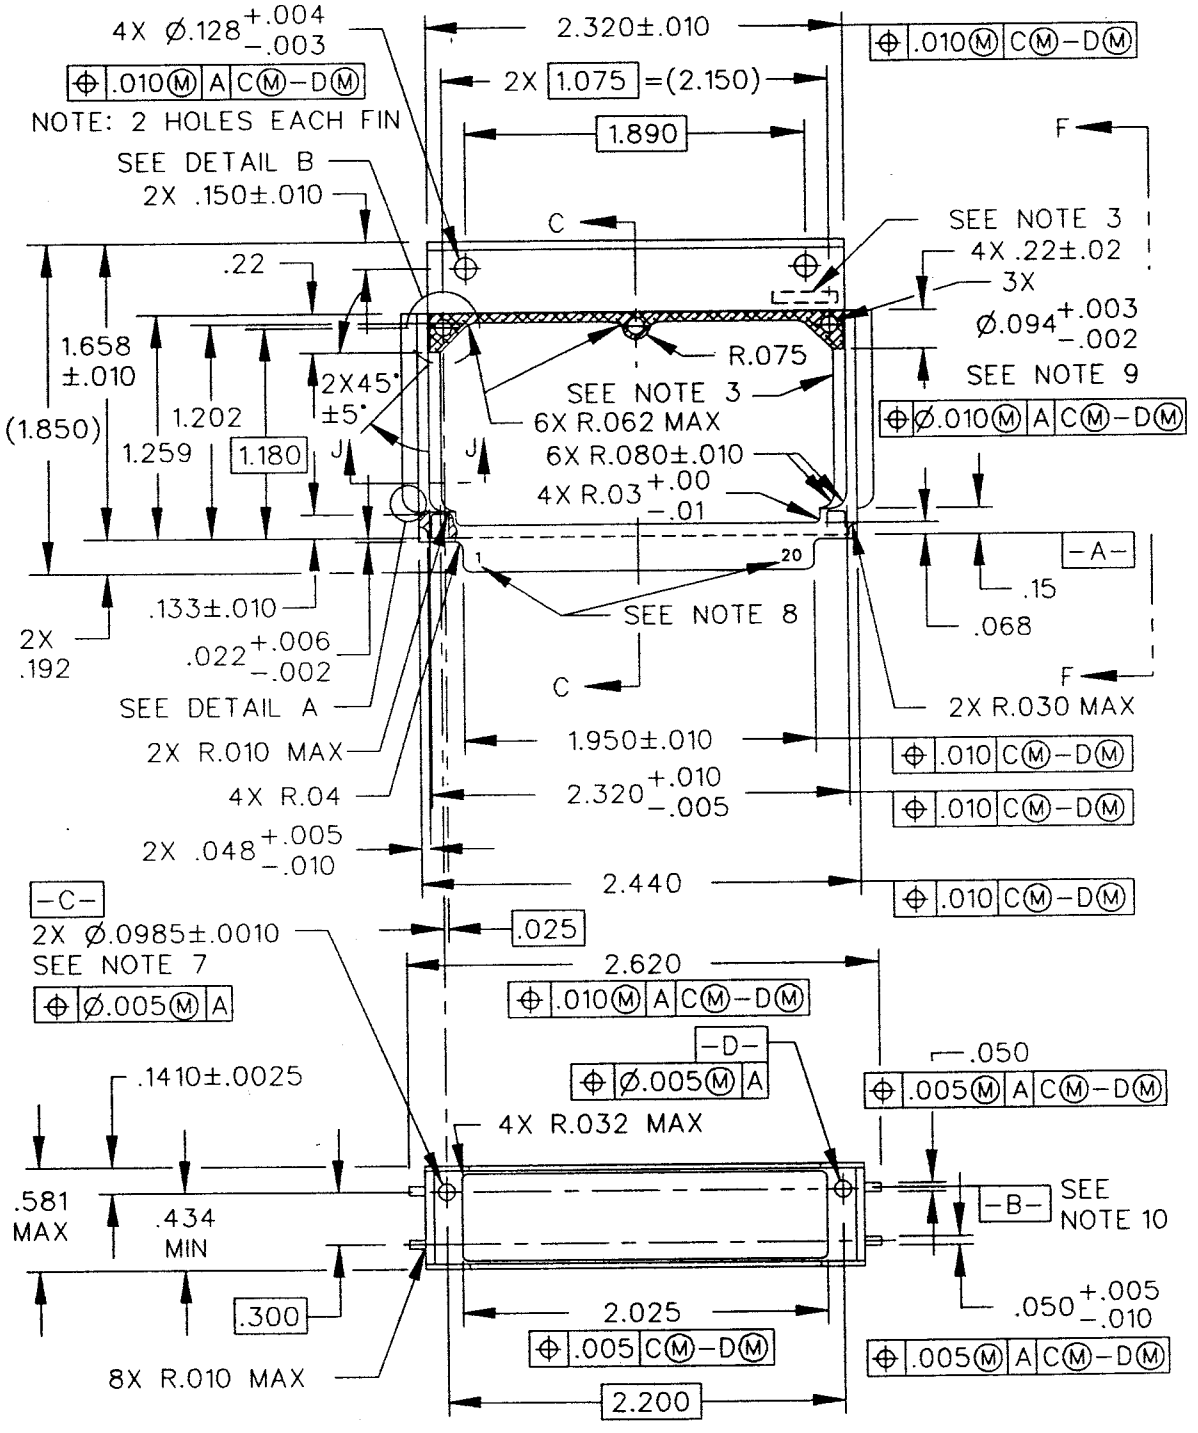


FIGURE 1. Dimensions and configurations. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.



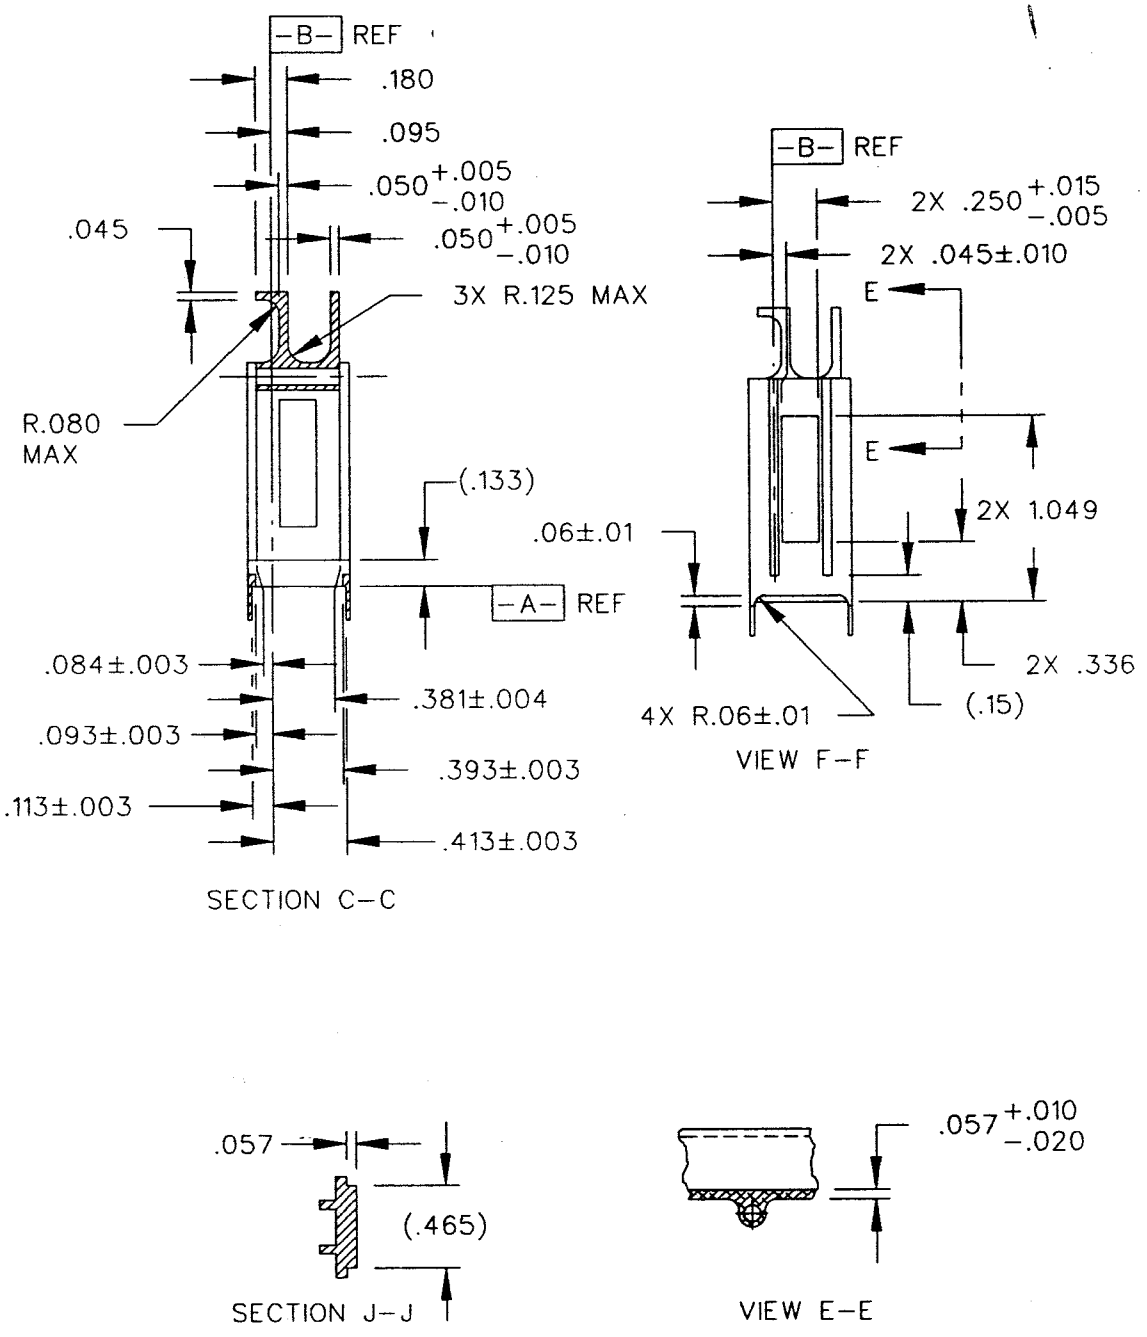


FIGURE 1. Dimensions and configurations - Continued. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

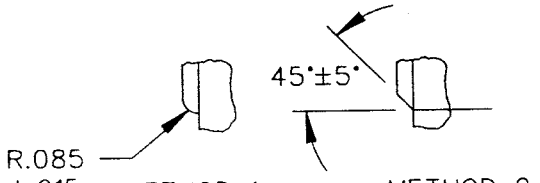

4X DETAIL A
OPTIONAL CONFIGURATION

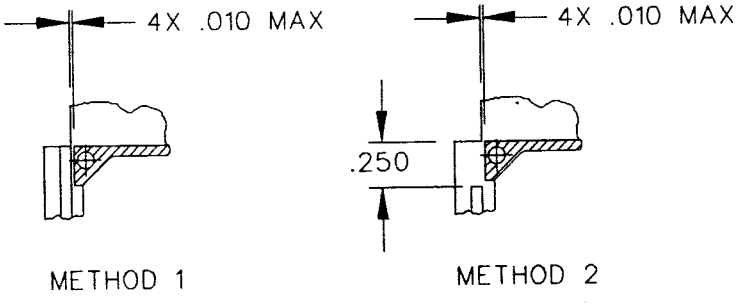

4X DETAIL B
OPTIONAL CONFIGURATION

FIGURE 1. Dimensions and configurations - Continued. *

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.0010	0.025	.04	1.0	.125	3.18	1.071	27.20
.002	0.05	.045	1.14	.128	3.25	1.075	27.30
.0025	0.064	.048	1.22	.1410	3.581	1.202	30.53
.003	0.08	.050	1.27	.150	3.81	1.224	31.09
.004	0.10	.057	1.45	.155	3.94	1.281	32.54
.005	0.13	.06	1.5	.1700	4.318	1.680	42.67
.006	0.15	.062	1.57	.180	4.57	1.850	46.99
.0075	0.190	.075	1.90	.22	5.6	1.890	48.01
.01	0.25	.080	2.03	.250	6.35	1.950	49.53
.010	0.3	.0845	2.146	.300	7.62	2.025	51.44
.015	0.38	.090	2.29	.358	9.09	2.200	55.88
.020	0.51	.093	2.36	.381	9.68	2.320	58.93
.022	0.56	.094	2.392	.393	9.98	2.440	61.98
.025	0.64	.095	2.41	.4250	10.795	2.620	66.55
.030	0.76	.0985	2.502	.434	11.02		
.032	0.81	.1125	2.858	.581	14.76		

NOTES:

1. Dimensions are in inches.

2. Metric equivalents are given for general information only and are based on 1.0 inch = 25.4 mm.

3. Mark on this portion of frame with white characters or raised cast characters .06 high, raised .01 maximum. No marking but identifying part number.

4. All surfaces to have 125 microinch finish unless otherwise specified.

5. Surfaces indicated by  shall be coated with a chemical film on both near and far sides.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T14:37Z
Check the source to verify that this is the current version before use.

6. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

7. Holes shall not be drilled through; drill points optional.

8. Contact numbers 1 and 20 shall be marked on the pin shield in white characters, .06 inch high, on opposite side mark 21 and 40, except as noted in table I.

9. These three holes accommodate insert M28754/41-01 and screw M28754/40-03.

10. A line passing through the center of the two .0985 ±.0010 diameter holes establishes datum -B- . *

11. Draft allowances shall remain within specified part tolerances. *

12. All dimensional measurements shall be made with the part in a restrained position. *

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Aluminum alloy, casting, 360 or 380 in accordance with QQ-A-591.

Surface treatment: Part number M28754/23-01 and 23-03 shall be anodized in accordance with MIL-A-8625, type II, class 2, black except surfaces indicated (see note 5) shall be coated with a chemical film in accordance with MIL-C-5541, class 3. *

Casting: Casting shall not show evidence of flashing or pin ejection marks exceeding above surface.

Marking: In accordance with MIL-C-28754 and figure 1.

Source: https://assist.dla.mil -- Downloaded: 20261-20T14:37Z
Check the source to verify that this is the current version before use.

Military part number: M28754/23- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number 2572613, code identification number 10001.

TABLE I
Dash numbers and characteristics

Dash no	Surface treatment
01	With anodize and chemical film
02	Without anodize, without chemical film, without any marking
03	With anodize, with chemical film, without any marking

QUALIFICATIONS:

Qualifications testing: Perform the applicable tests as specified in MIL-C-28754 and the appendix thereto.

Extended qualifications: Qualification of M28754/23-01, extends qualifications to other products as specified in the appendix to MIL-C-28754.

The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - SH
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS

Agent:
NW

Preparing activity:
Navy - SH

(Project 5935-3813-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:37Z
Check the source to verify that this is the current version before use.