
MILITARY SPECIFICATION SHEET


CONNECTORS, ELECTRICAL, MODULAR, PIN, KEYING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the keying pins described herein shall consist of this specification and the latest issue of MIL-C-28754.

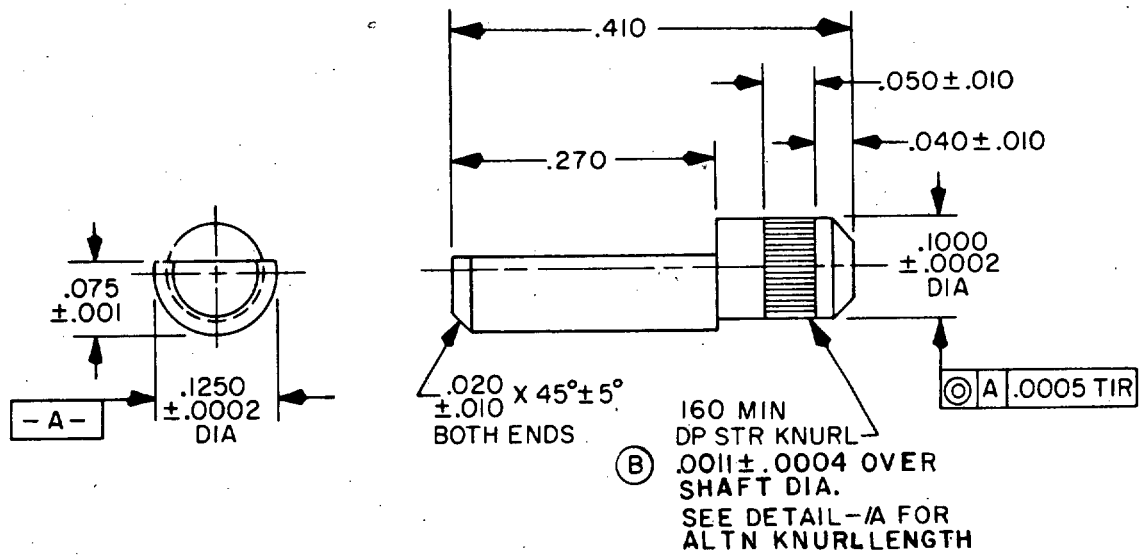

Configuration 1. Keying pin, D shape, flangless.

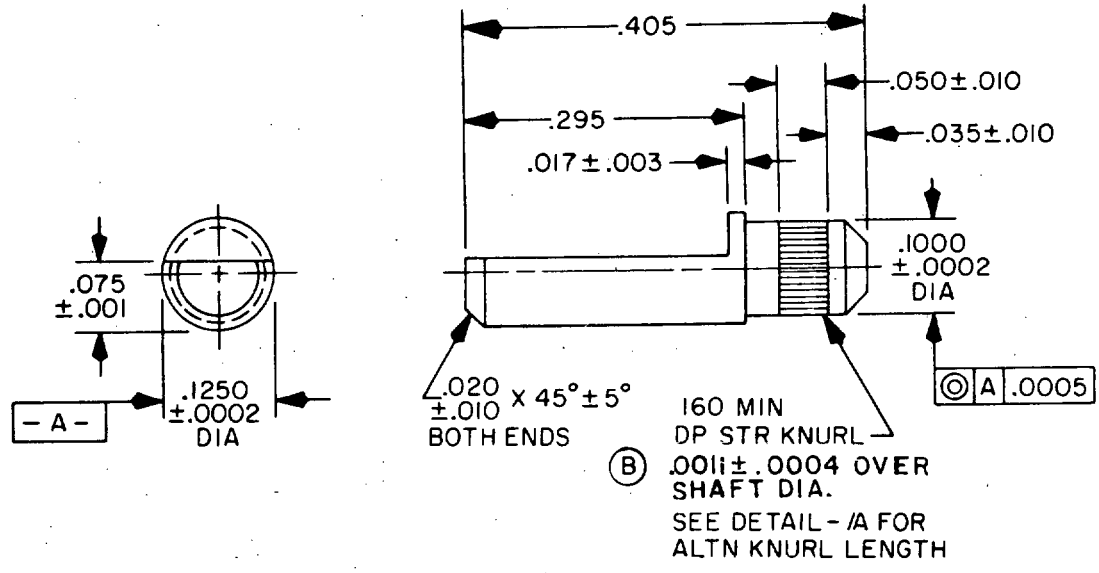


Configuration 2. Keypin pin, D shape, flange D.


FIGURE 1. Dimensions and configurations.

(B) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

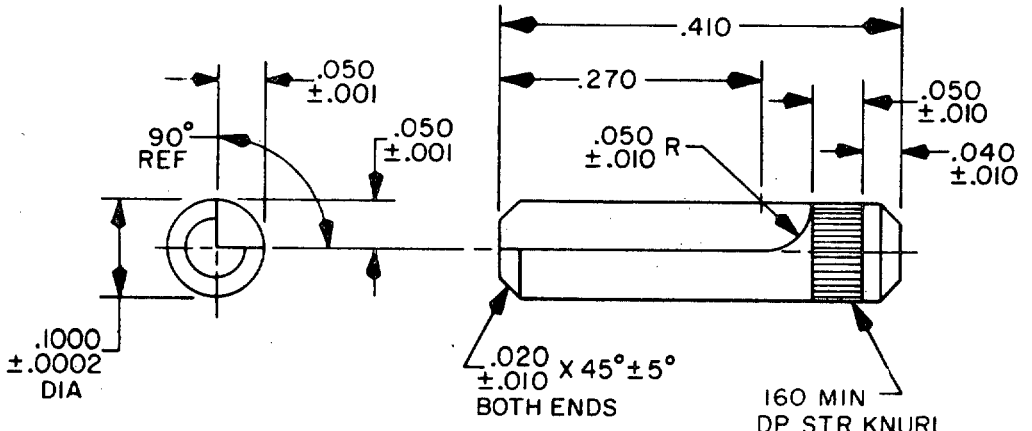

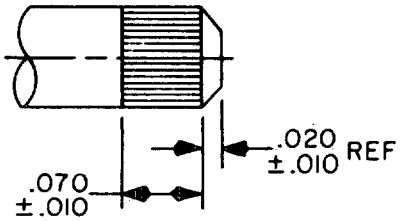

DETAIL-A
ALTN KNURL CONFIGURATION

INCHES	MM	INCHES	MM
.0002	.005	.035	.889
.0004	.010	.040	1.02
.0005	.013	.050	1.27
.001	.025	.075	1.90
.0011	.028	.1000	2.540
.003	.08	.1250	3.175
.005	.13	.270	6.86
.010	.25	.295	7.49
.01	.3	.405	10.29
.017	.43	.410	10.41
.020	.51		

Configuration 3. Keying pin 90°.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Break sharp edges .005 inch maximum.
4. Inside corners .005 inch R maximum.
5. Unless otherwise specified, tolerances are ±.005 on three place decimals and ±.01 on two place decimals and ±2° on angles.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Corrosion resistant steel, ANSI, 303 or 303 SE ANL and CD, or QQ-S-764, CL 303 or 303 SE, condition A. .188 diameter stock for configuration 1, .125 diameter stock for configurations 2 and 3.

Surface treatment: Passivate in accordance with QQ-P-35.

Surface finish: 125 microinches per MIL-C-28754.

Marking: Marking shall be on package and not on pins.

Military part number: M28754/24- (dash number from table I).

TABLE I. Dash numbers and characteristics.

Dash number	Pin configuration	Knurl configuration
01 02 03	1 2 3	Standard
04 05 06	1 2 3	Per detail A

Supersession data: This specification includes the requirements of drawing numbers 2648702, 2648703, and 2672135, code identification number 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3266-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.