
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, GUIDE, RETAINING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the retaining guide described herein shall consist of this document and the latest issue of Specification MIL-C-28754.

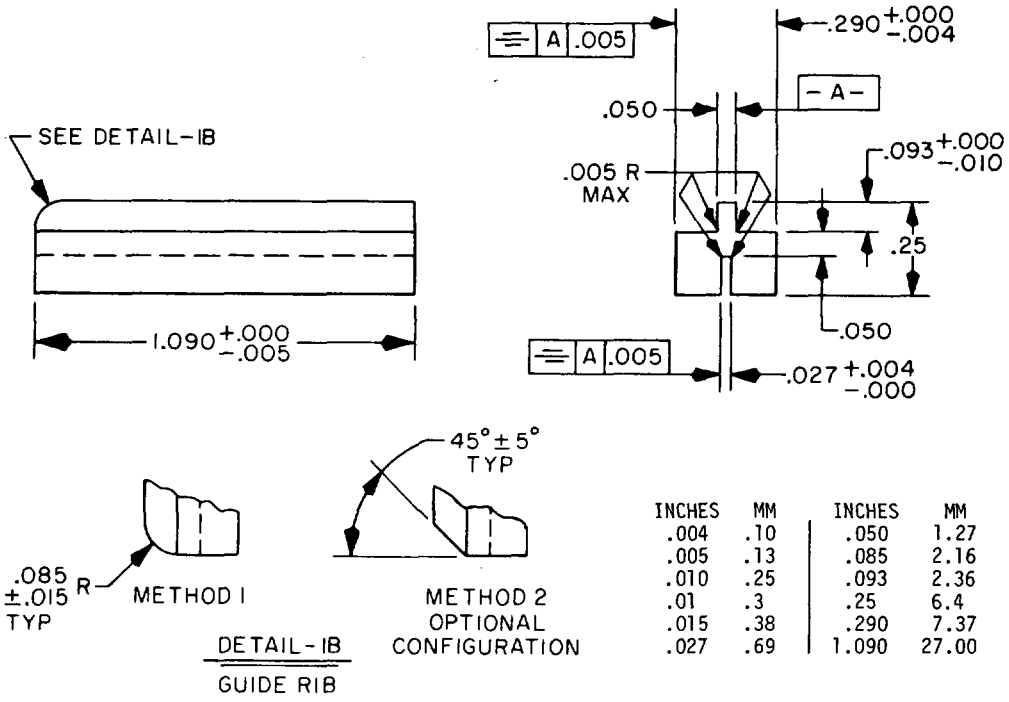

INCHES	MM	INCHES	MM
.004	.10	.050	1.27
.005	.13	.085	2.16
.010	.25	.093	2.36
.01	.3	.25	6.4
.015	.38	.290	7.37
.027	.69	1.090	27.00


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Remove burrs.
4. Break sharp edges .01 inch maximum.
5. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.


FIGURE 1. Single rib guide M28754/25-01, M28754/25-02, M28745/25-03, M28754/25-04, and M28754/25-05.

(A) denotes changes

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

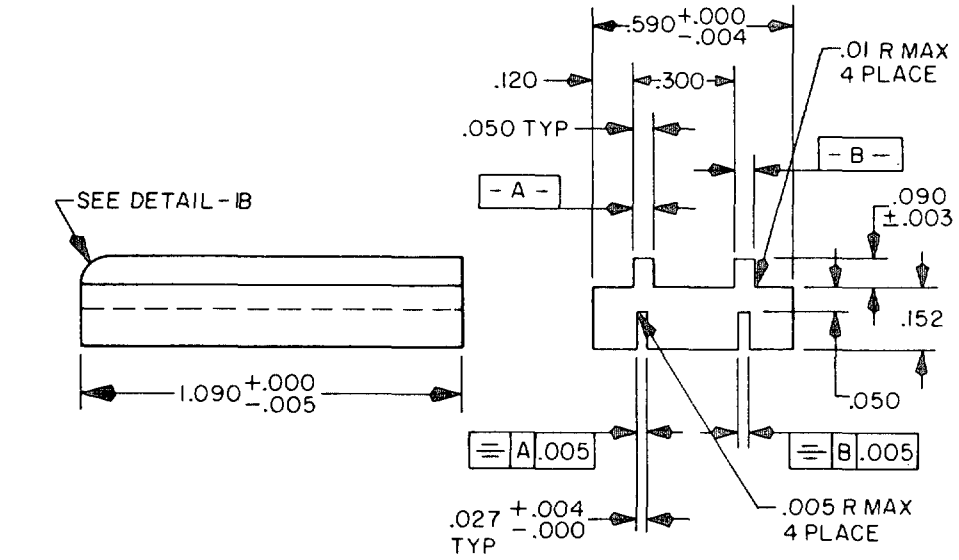

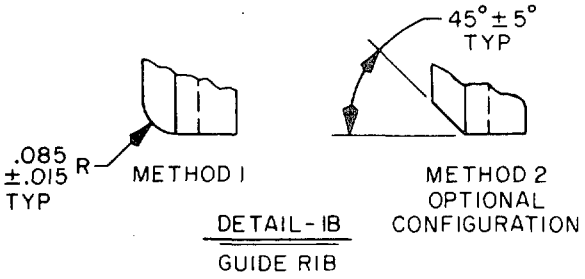

INCHES	MM	INCHES	MM
.003	.08	.085	2.16
.004	.10	.090	2.29
.005	.13	.120	3.05
.010	.25	.152	3.86
.01	.3	.300	7.62
.015	.38	.590	14.99
.027	.69	1.090	27.69
.050	1.27		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Remove burrs.
4. Break sharp edges .01 inch maximum.
5. Unless otherwise specified, tolerance is ±.005 on three place decimals, ±.01 on two place decimals and ±2° on angles.

FIGURE 2. Double rib guide M28754/25-06, M28754/25-07, M28754/25-08, M28754/25-09, and M28754/25-10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Ⓐ Dimensions and configuration: See figures 1 and 2.

Material: See table I.

TABLE I. Dash number and materials.

Dash number	Material
01,06	AL alloy 6061-T6, T6510 or T6511 per QQ-A-200/8, Anodize per MIL-A-3825, type II, clear
02,07	Diallyl phthalate, molded, per MIL-P-19833, type GD1-30F
03,08	Polycarbonate, per L-P-393
04,09	Nylon, per MIL-P-20693, type III, grade E
05,10	Nylon, glass-fiber filled, molded, per L-P-395, type I, nylon 6/6

Military part number: M28754/25- (dash number from table I).

Ⓐ Supersession data: This specification includes the requirements of drawings number 63A49C5 and 63A49C10, code identification number 10001.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army -
Navy - MC
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - YD, AS
Air Force -

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3036-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.