INCH-POUNDS

MIL-DTL-28754/25B
21 November 2014
SUPERSEDING
MIL-C-28754/25A
4 September 1975

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR,
GUIDE, RETAINING

Inactive for new design after 13 December 1982. For new design, use MIL-DTL-28754/7.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-C-28754.

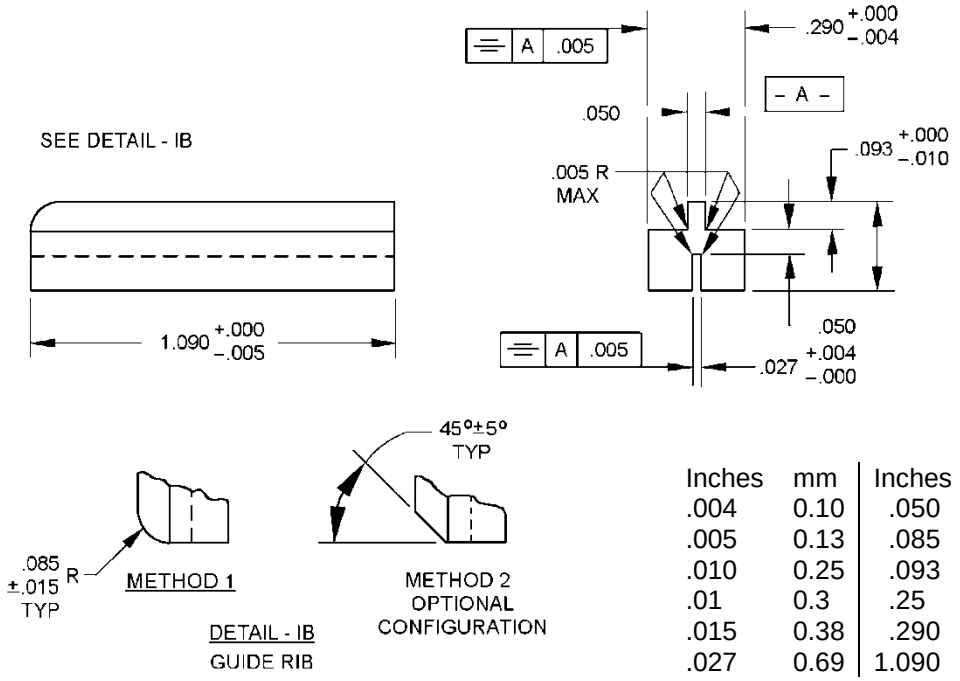

Inches	mm	Inches	mm
.004	0.10	.050	1.27
.005	0.13	.085	2.16
.010	0.25	.093	2.36
.01	0.3	.25	6.4
.015	0.38	.290	7.37
.027	0.69	1.090	27.00

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information.
3. Remove burrs.
4. Break sharp edges .01 inch maximum.
5. Unless otherwise specified, tolerance is ± .005 on three place decimals, ± .01 on two place decimals and ± 2° on angles.

FIGURE 1. Single rib guide M28754/25-01, M28754/25-02, M28754/25-03, M28754/25-04, and M28754/25-05.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

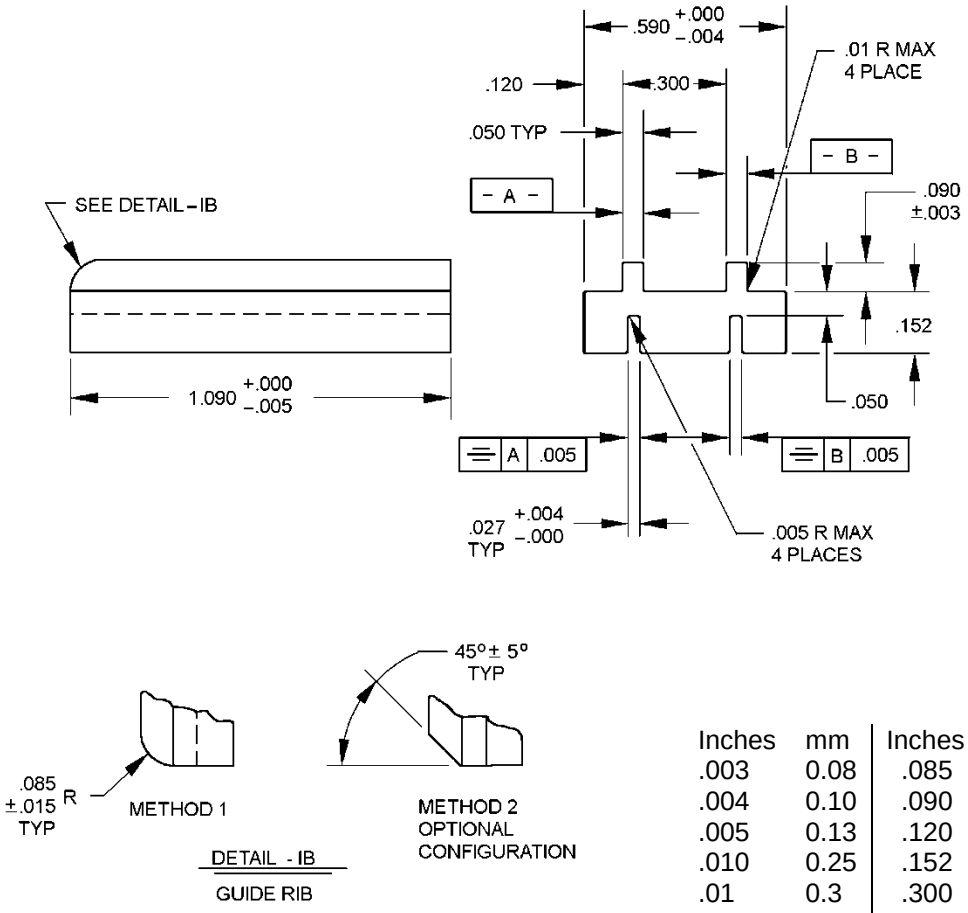

Inches	mm	Inches	mm
.003	0.08	.085	2.16
.004	0.10	.090	2.29
.005	0.13	.120	3.05
.010	0.25	.152	3.86
.01	0.3	.300	7.62
.015	0.38	.590	14.99
.027	0.69	1.090	27.69
.050	1.27		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Remove burrs.
4. Break sharp edges .01 inch maximum.
5. Unless otherwise specified, tolerance is ± .005 on three place decimals, ± .01 on two place decimals and ± 2° on angles.

FIGURE 2. Double rib guide M28754/25-06, M28754/25-07, M28754/25-08, M28754/25-04, and M28754/25-10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Material: See table I.

TABLE I. Dash number and materials.

Dash number	Material
01, 06	AL alloy 6061-T6, T6510 or T6511 in accordance with SAE-AMS- QQ-A-200/8, Anodize in accordance with MIL-A-8625, type II, clear
02, 07	Diallyl phthalate, molded in accordance with ASTM D5948, type GDI-30F
03, 08	Polycarbonate, in accordance with ASTM D3935.
04, 09	Nylon, in accordance with ASTM D4066.
05, 10	Nylon, glass-fiber filled, molded, in accordance with ASTM D4066.

Military part number: M28754/25- (dash number from table I).

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-C-28754, this document references the following:

MIL-A-8625
ASTM D3935
ASTM D4066
ASTM D5948
SAE-AMS-QQ-A-200/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA - CC

Review activities:
Army AR, MI
Navy – MC, YD
Air Force – 99

Preparing activity:
DLA - CC

(Project 5935-2014-077)

NOTE: The activities above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:38Z
Check the source to verify that this is the current version before use.