
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR TYPE III, MALE CONTACT AND INSULATOR BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

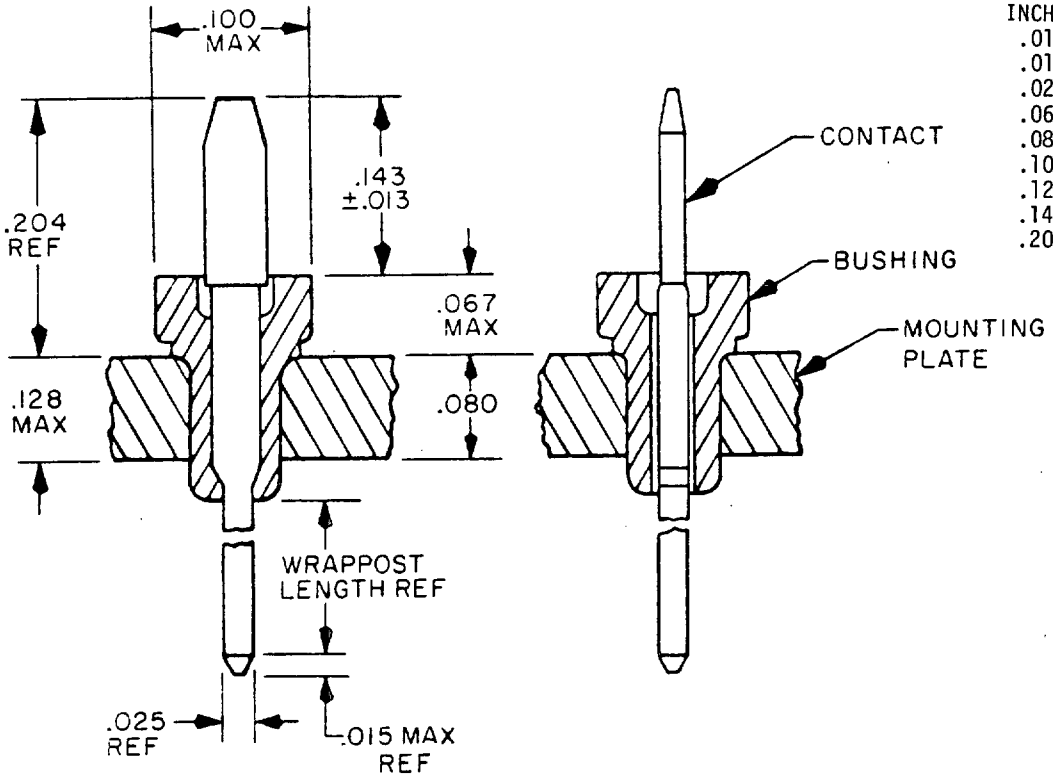

INCHES	MM
.013	.33
.015	.38
.025	.64
.067	1.70
.080	2.03
.100	2.54
.128	3.25
.143	3.63
.204	5.18

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 1. Typical male contact, pushing and mounting plate assembly.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.


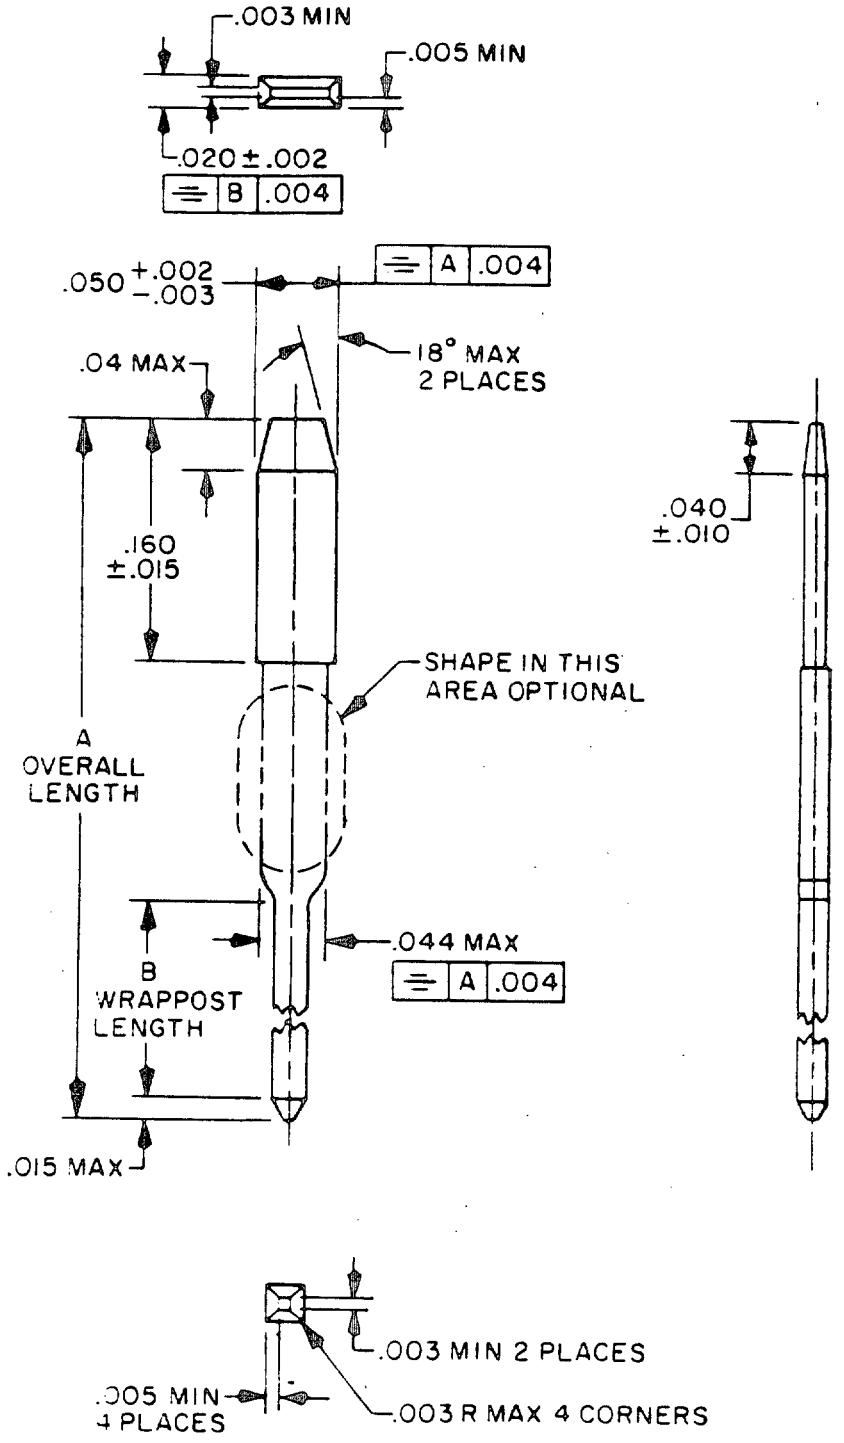


FIGURE 2. Contact, male, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.

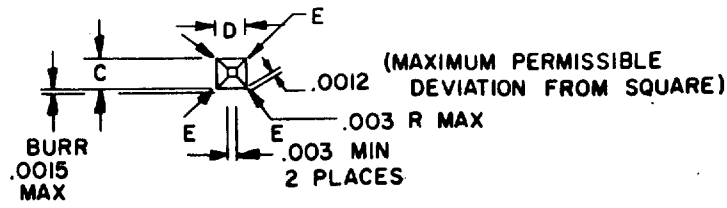

WRAPPOST GEOMETRY


C	D	E	PARALLELISM	STRAIGHTNESS
.025 (NOM) .022 (MIN)	.025 (NOM) .022 (MIN)	.0355 (MAX) .0325 (MIN)	.002	.005 in./in

INCHES	MM
.002	.05
.003	.08
.004	.10
.005	.13
.010	.25
.015	.38
.020	.51
.025	.64
.040	1.02
.044	1.12
.050	1.27
.160	4.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.5 mm) for two place decimals and ±2° on angles.

FIGURE 2. Contact, male, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.

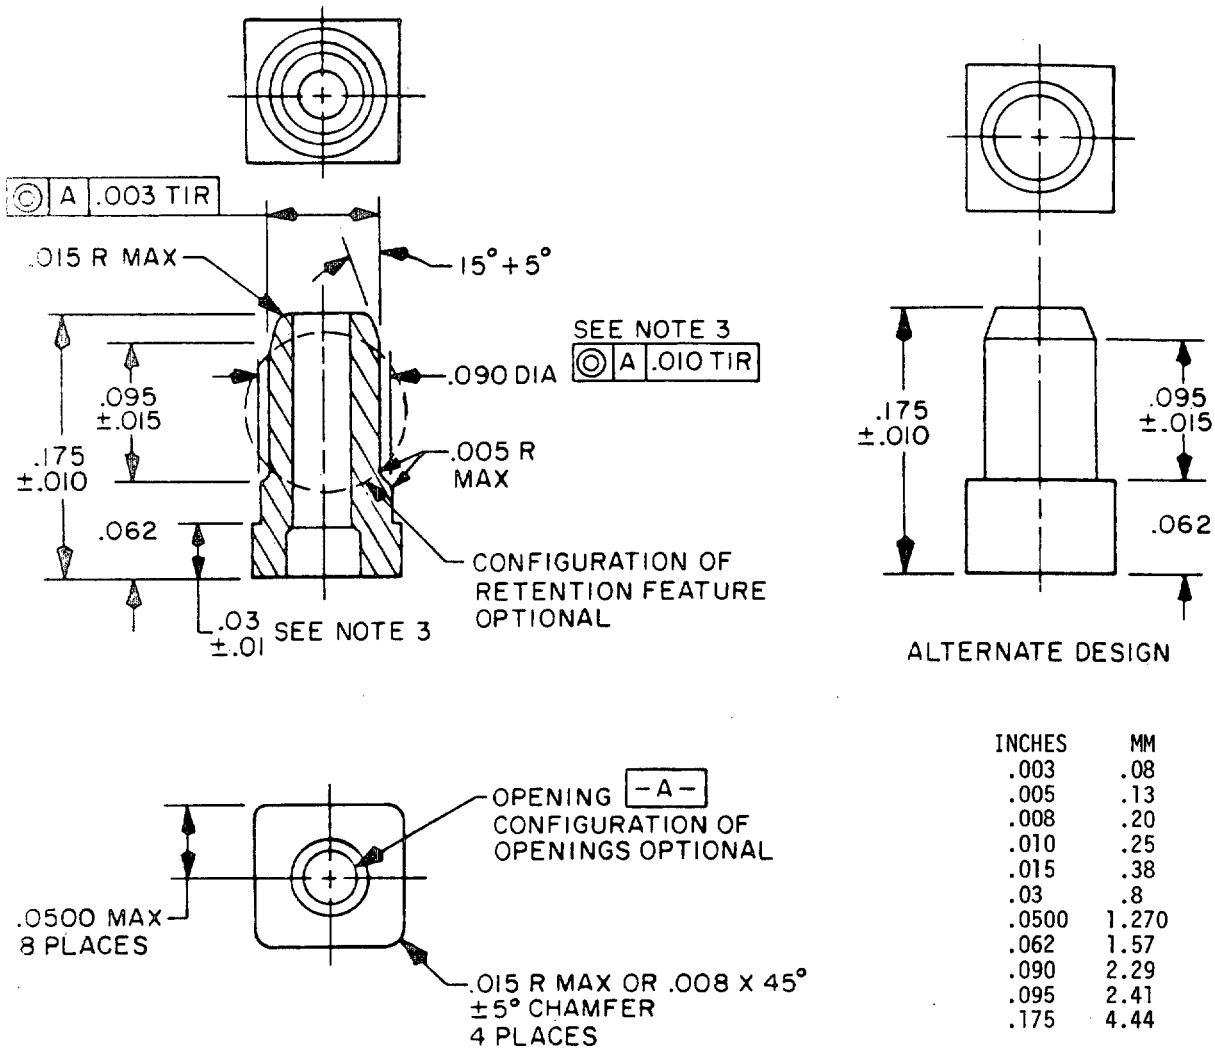


INCHES	MM
.003	.08
.005	.13
.008	.20
.010	.25
.015	.38
.03	.8
.0500	1.270
.062	1.57
.090	2.29
.095	2.41
.175	4.44

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The .03 X .090 diameter feature is optional.
4. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 3. Bushing, insulator, male.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.

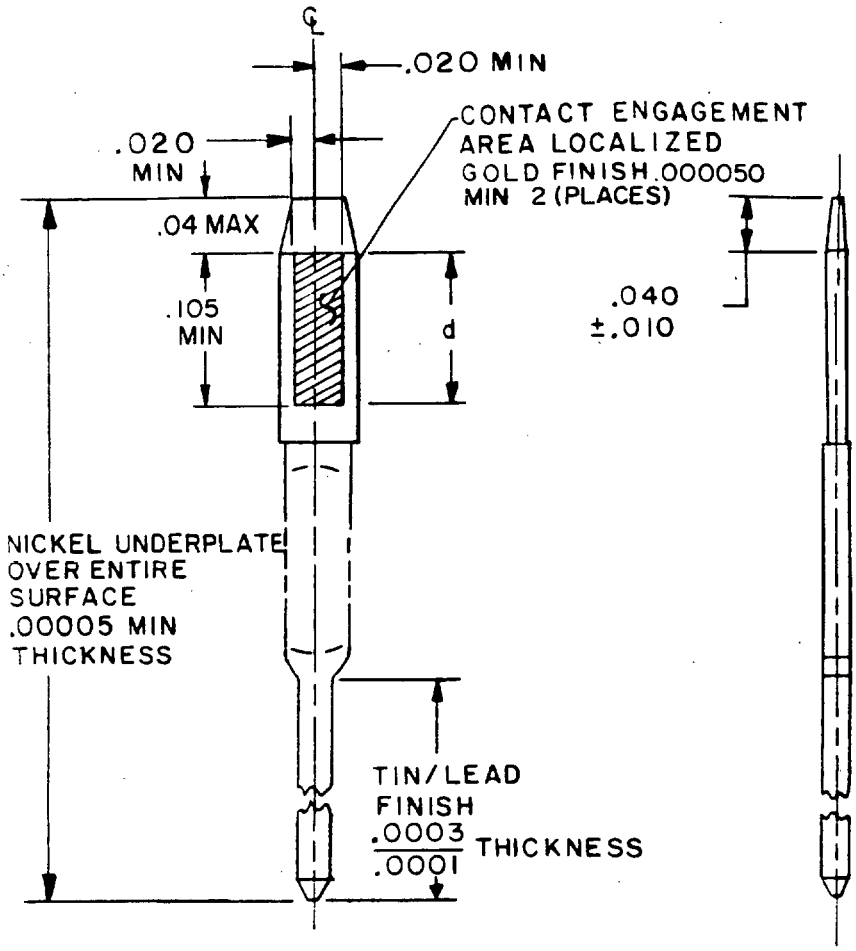

INCHES	MM
.00005	0.0013
.0001	0.003
.003	0.008
.010	0.25
.020	0.51
.040	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Dimensions in this figure are for locating areas and of localized finish only.

FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3, and 4.

Material:

Contacts: See figures 1 and 2. Contacts shall be brass, half hard per QQ-B-626, composition 360 or QQ-B-613, composition 260.

Exposed base material: Exposed base material is permitted in noncritical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

Bushing: Bushing shall be polyamide (nylon) per L-P-410 or ASTM D 4066-82, type I (see figure 3).

Insulator bushing color: The insulator bushing color shall be the natural color of the base material.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 microinches minimum. Area of gold finish shall be as specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Tin-lead finish: Tin-lead finish shall be in accordance with MIL-P-81728 and shall have a tin-composition of 50 to 95 percent. Tin-lead plating thickness shall be .0001 to .0003 inch thick.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Temperature rating: -55°C to +105°C.

Voltage rating: 300 volts, ac (rms) at sea level.

Durability: Voltage drop shall not exceed 20 millivolts.

Military part number M28754/35- (dash number from table I).

TABLE I. Dash numbers and dimensions.

Dash no.	Overall length "A" ±0.010	Wrappost length "B" (Ref)
01	0.513	0.175
02	0.588	0.250
03	0.688	0.350
04	0.838	0.500
05	0.963	0.625
06	1.088	0.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.

Marking: In accordance with MIL-C-28754.

Shipping: Bulk shipment shall be in unassembled condition.

Supersession data: This specification includes the requirements of drawing number WS6157/2, code identification 10001.

QUALIFICATIONS:

Qualification testing: Test plate samples shall be submitted in accordance with MIL-C-28754, type III sample, and shall be pinned in one pin pattern with one style contact from table I, with 9 rows of MIL-C-28754/34 as applicable. Ten of each other wrappost length (see table I) to be qualified shall be submitted as loose parts. The test plates shall be subjected to group A inspection. The loose parts shall be subjected to group A inspection. Loose part qualification is contingent upon satisfactory results from the test plate testing.

Extended qualification: When qualified in accordance with MIL-C-28754/37, ends of all pin patterns shall contain MIL-C-28754/37 pins and polarizing bushings. When qualified with MIL-C-28754/35 only, all pin patterns shall contain MIL-C-28754/35 pins. When qualified in accordance with MIL-C-28754/34 and MIL-C-28754/36 or MIL-C-28754/38, one pin pattern of MIL-C-28754/35 shall be pinned in place of MIL-C-28754/34, and one pin pattern shall be pinned for each MIL-C-28754/36 and MIL-C-28754/38 (in place of MIL-C-28754/34).

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC, TD
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3406-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:40Z
Check the source to verify that this is the current version before use.