
MILITARY SPECIFICATION SHEET

CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III, FEMALE CONTACT AND POLARIZING BUSHING SET, REMOVABLE WIRE WRAPPOST TERMINAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28754.

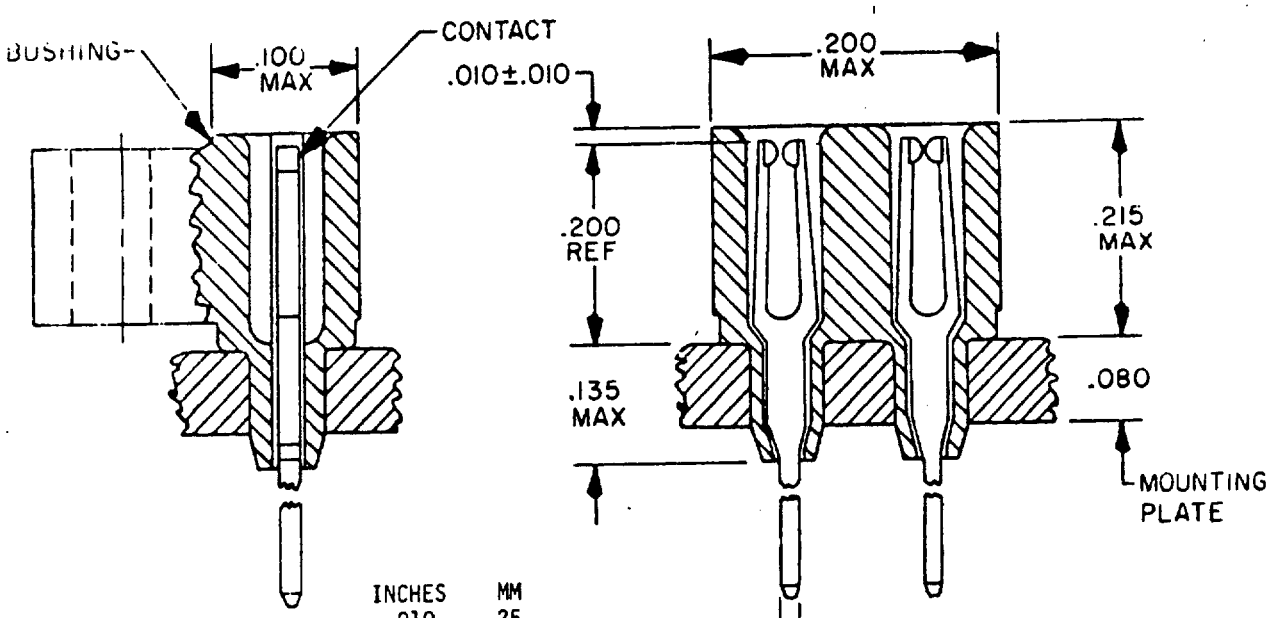

INCHES	MM
.010	.25
.025	.64
.080	2.03
.100	2.54
.135	3.43
.200	5.08
.215	5.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 1. Typical female contact, polarizing bushing and mounting plate assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.


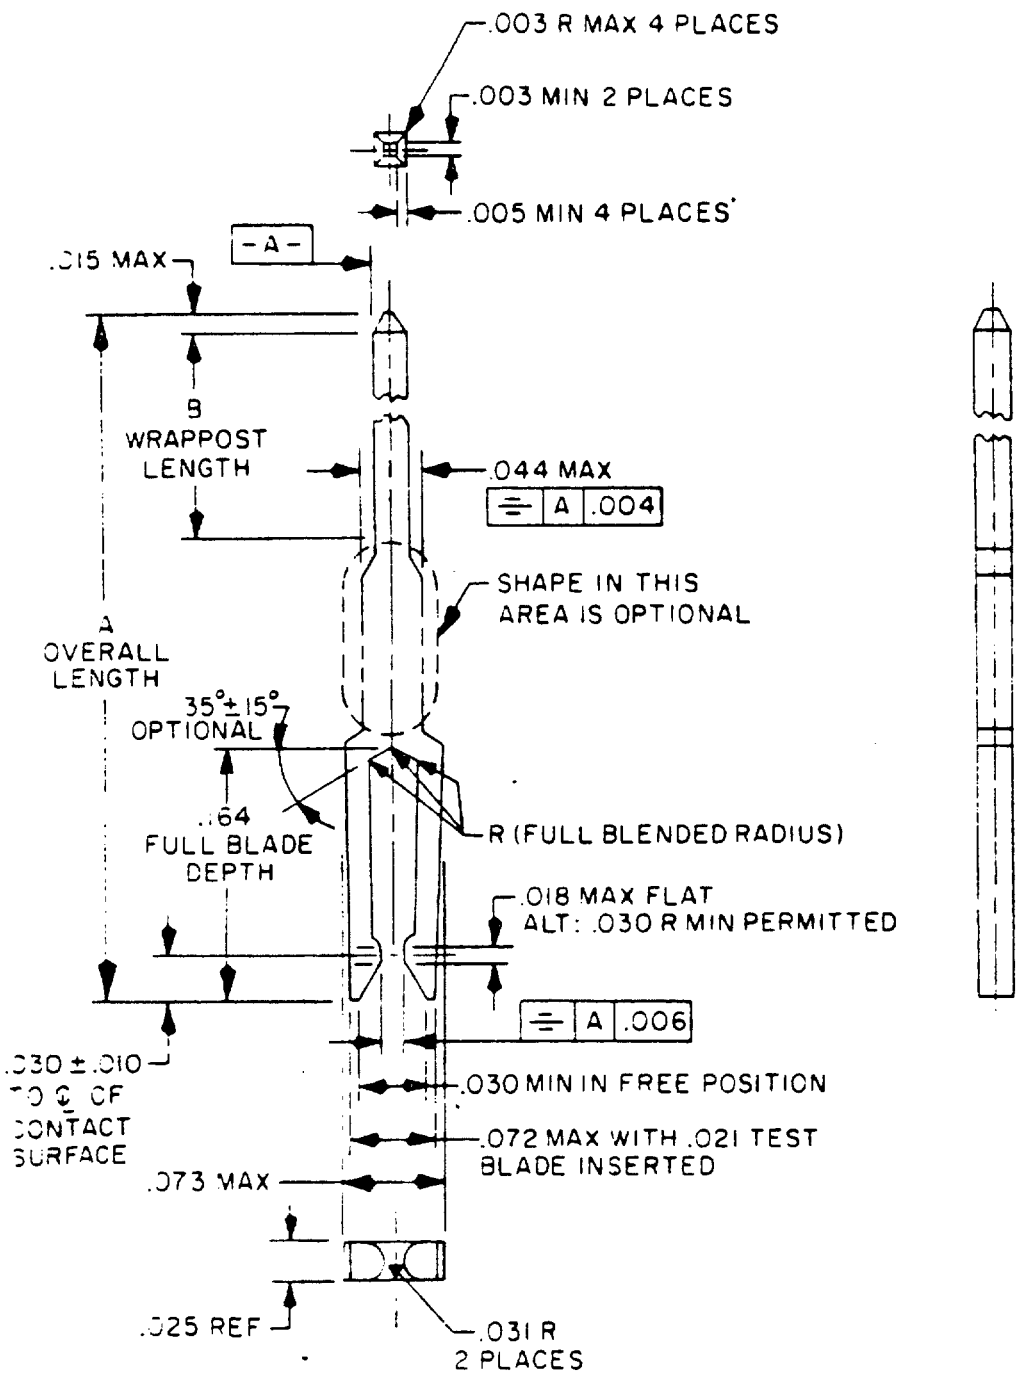


FIGURE 2. Contact, female, wrappost.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

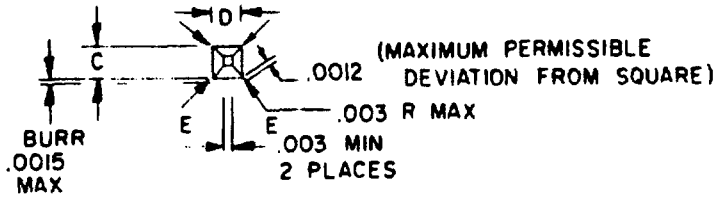

WRAPPOST GEOMETRY


C	D	E	PARALLELISM	STRAIGHTNESS
.025 (NOM) .022 (MIN)	.025 (NOM) .022 (MIN)	.0355 (MAX) .0325 (MIN)	.002	.005 in./in

INCHES	MM
.002	.05
.003	.08
.004	.10
.005	.13
.006	.15
.010	.25
.015	.38
.018	.46
.021	.53
.025	.64
.030	.76
.031	.79
.044	1.12
.072	1.83
.073	1.85
.164	4.17

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. See table I for dimensions A and B.
4. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 2. Contact, female, wrappost - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

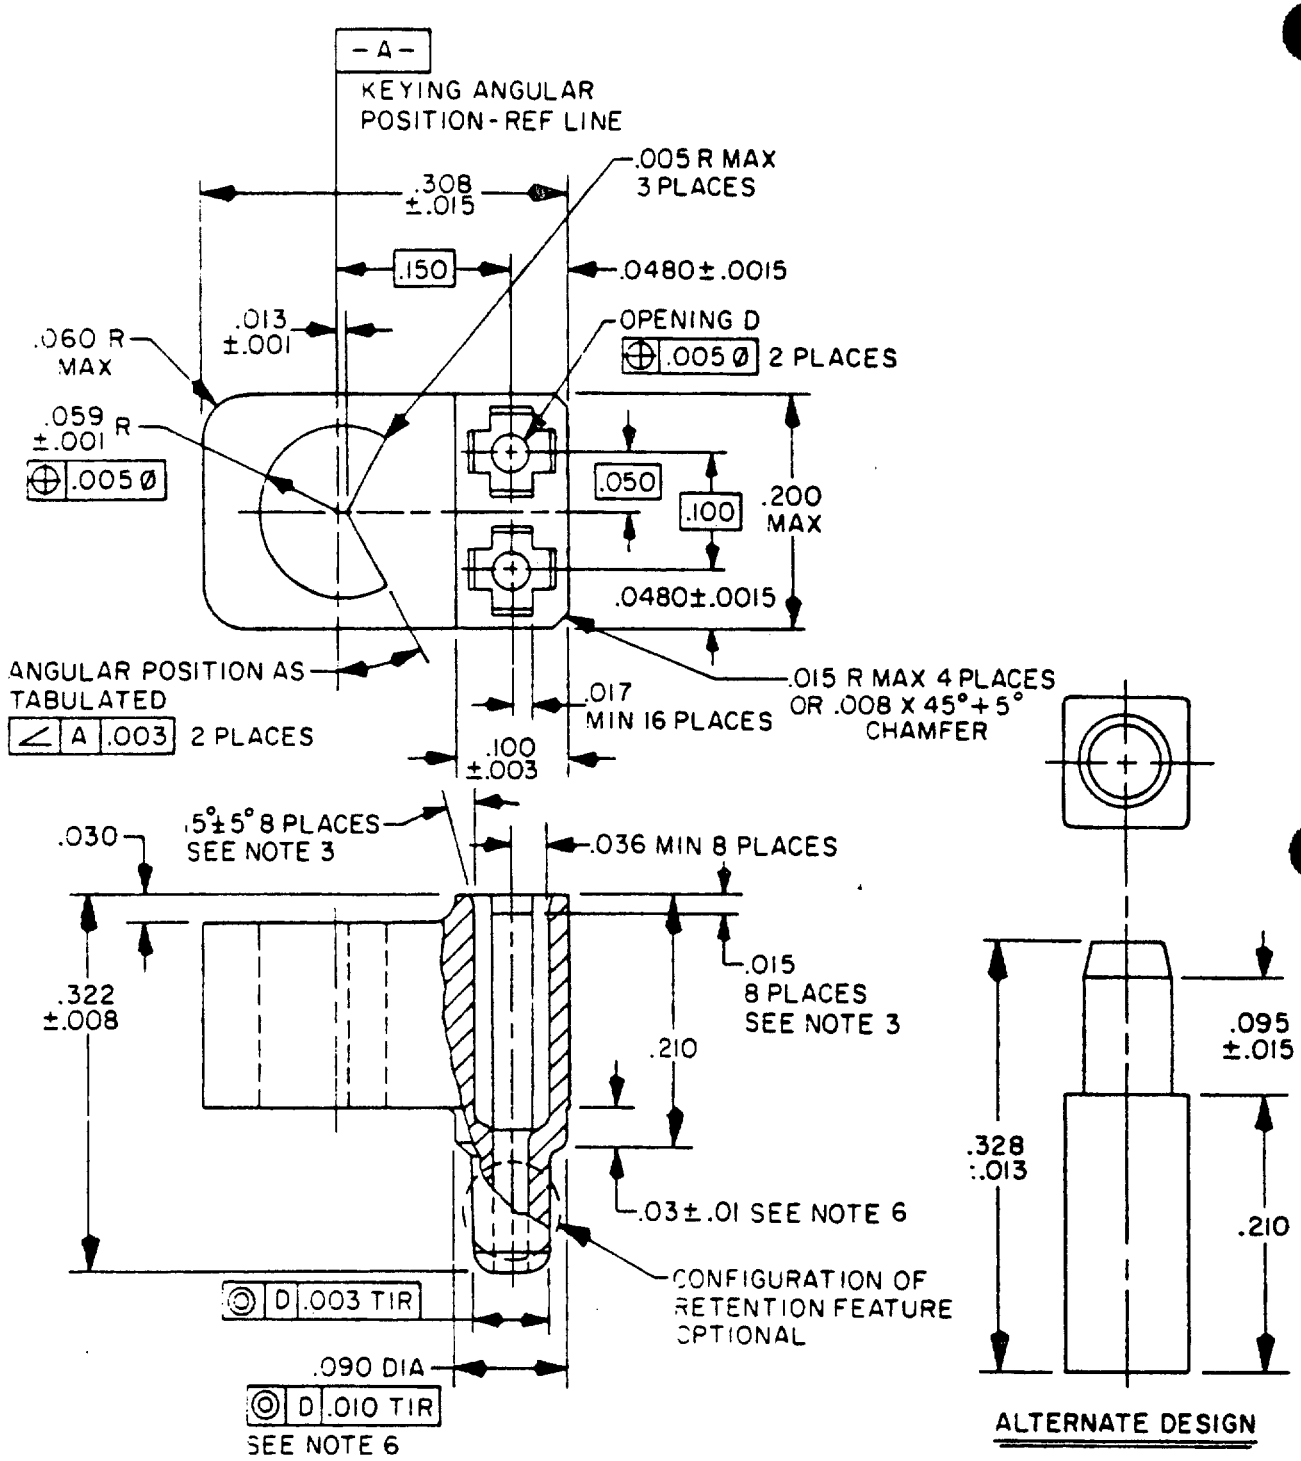

OUTLINE A


INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.010	.25	.036	.91	.090	2.29	.210	5.33
.0015	.038	.013	.33	.0480	1.219	.095	2.41	.308	7.82
.003	.08	.015	.38	.050	1.27	.100	2.54	.322	8.18
.005	.13	.017	.43	.059	1.50	.150	3.81	.328	8.33
.008	.20	.030	.76	.060	1.52	.200	5.08		

FIGURE 3(a). Bushing, polarizing, female.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Radius optional on .015 ±.005 X 15° ±5° chamfer.
4. Dimensions include draft.
5. Inside corners .005 R maximum unless otherwise specified.
6. The .03 X .090 feature is optional.
7. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 3(a). Bushing, polarizing, female - Continued.

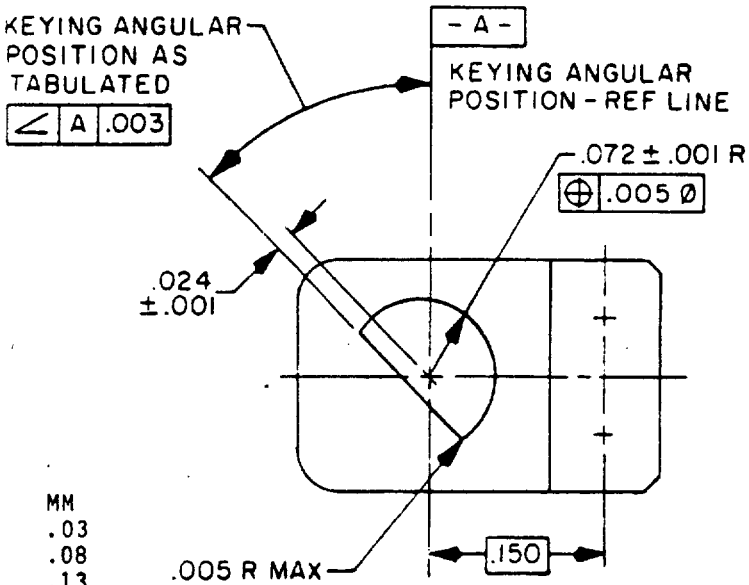


INCHES	MM
.001	.03
.003	.08
.005	.13
.024	.61
.072	1.83
.150	3.81

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±2° for angles.

FIGURE 3(b). Bushing, polarizing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

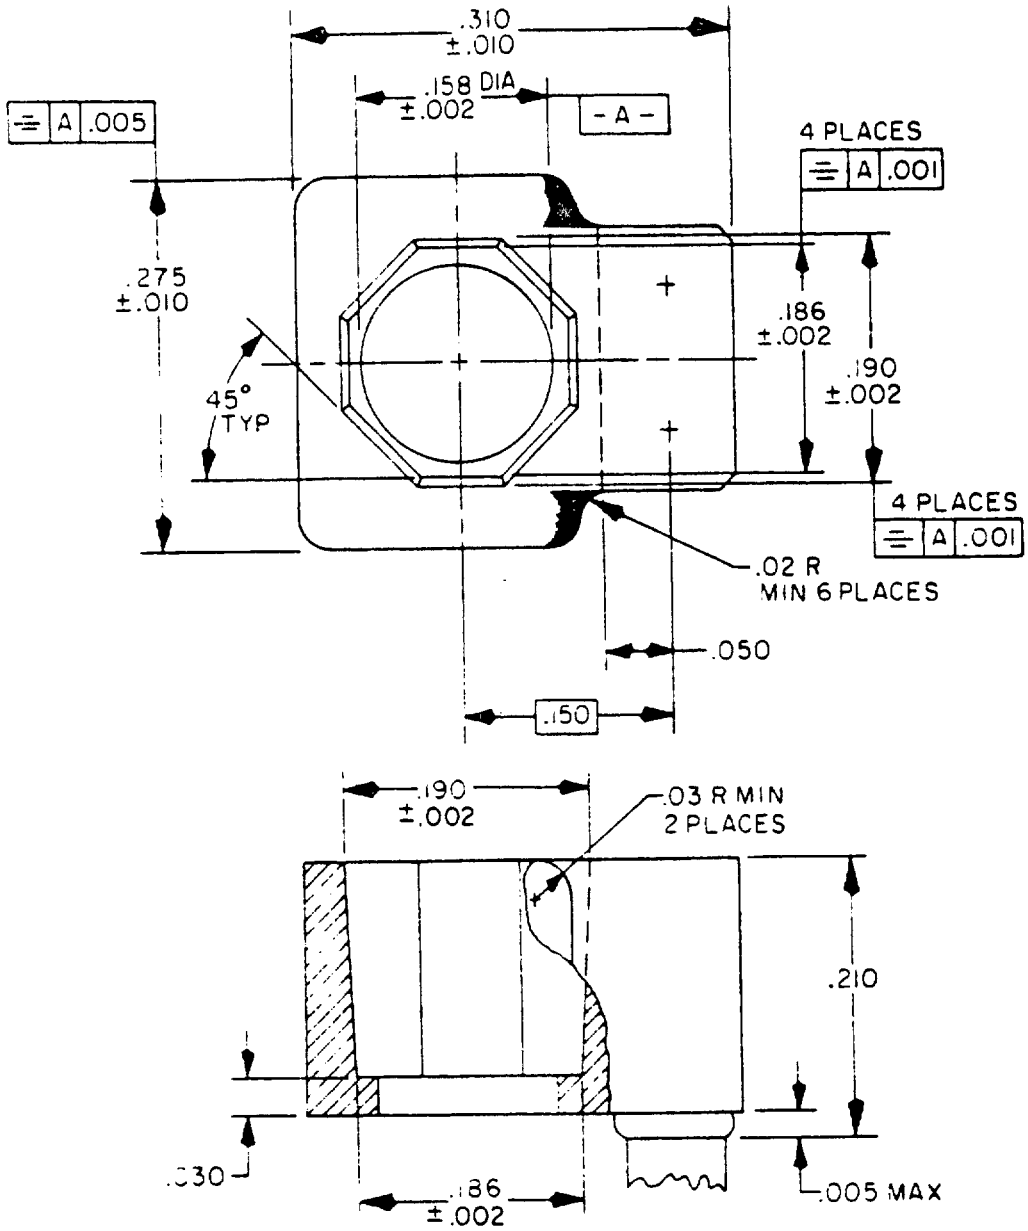

OUTLINE C


OTHERWISE SAME AS OUTLINE A

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.030	.76	.190	4.83
.002	.05	.050	1.27	.210	5.33
.005	.13	.150	3.81	.275	6.98
.010	.25	.158	4.01	.310	7.87
.020	.51	.186	4.72		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals, ±.01 (.3 mm) for two place decimals and ±1° for angles.

FIGURE 3(c). Bushing, polarizing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

Polarizing style	Outline letter	Keying position as viewed at bushings top surface
a	A	0° 
b	A	45° 
c	A	90° 
d	A	135° 
e	A	180° 
f	A	225° 
g	A	270° 
h	A	315° 
j	B	0° 




Polarizing style	Outline letter	Keying position as viewed at bushings top surface
j	B	45° 
k	B	90° 
l	B	135° 
m	B	180° 
n	B	225° 
p	B	270° 
q	B	315° 
r	Same as 'A' except for thru hole as shown	.093 ± .003 Dia. 
s	C	

FIGURE 3(d). Bushing, polarizing, female (keying hole orientation).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

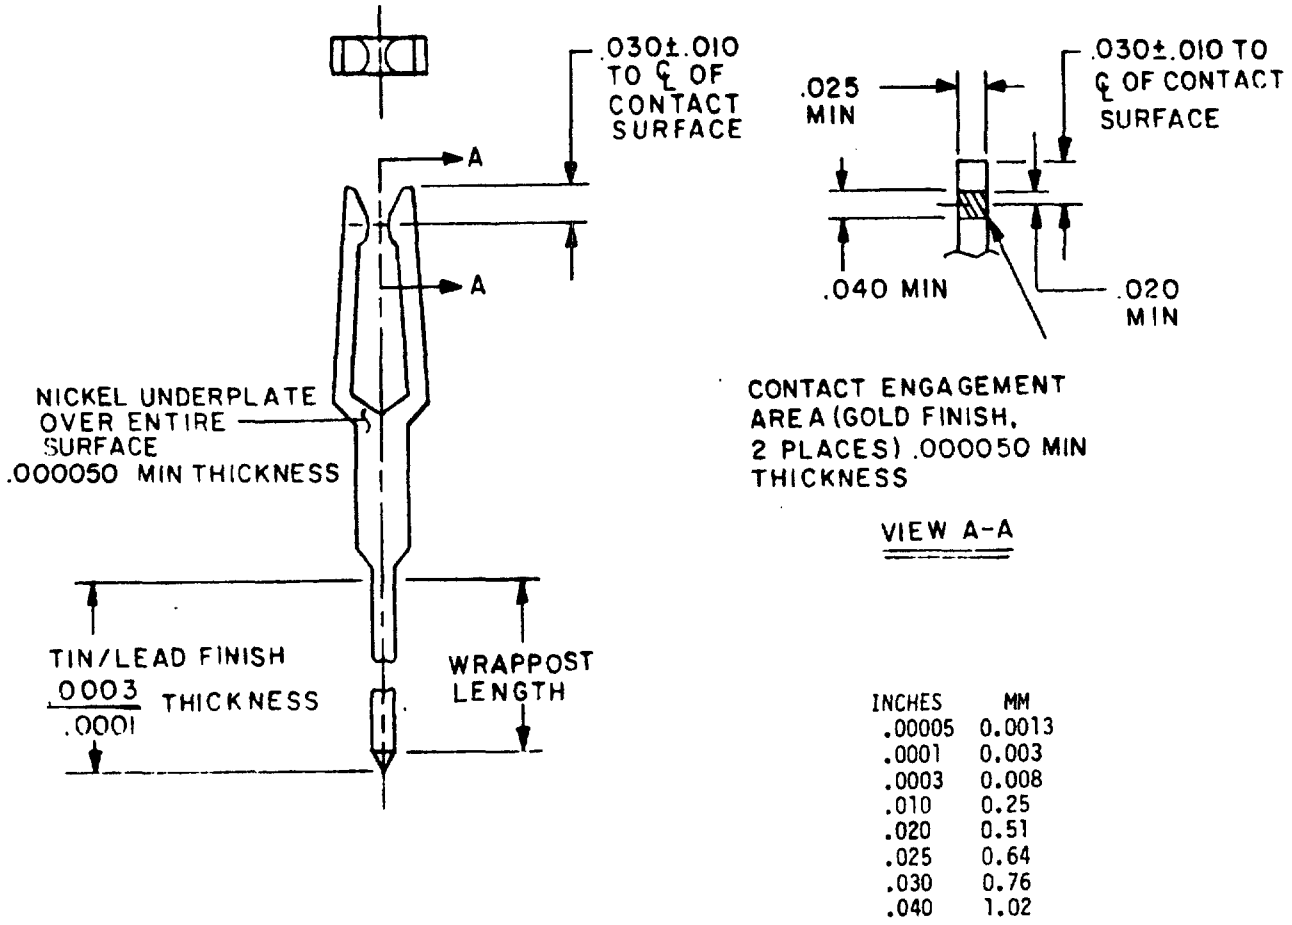

INCHES	MM
.00005	0.0013
.0001	0.003
.0003	0.008
.010	0.25
.020	0.51
.025	0.64
.030	0.76
.040	1.02

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals, ±.01 (0.3 mm) for two place decimals and ±2° for angles.
4. Dimensions on this figure are for locating areas of localized finish only.

FIGURE 4. Localized finish (optional).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See table I and figures 1, 2, 3, and 4.

Material:

Contacts: Contacts shall be beryllium copper per QQ-C-533, minimum hardness of Rockwell 50 on 30N scale.

Exposed base material: Exposed base material is permitted in noncritical breakoff or plating carrier areas of the connector parts providing all performance requirements are maintained with no degradation of critical areas.

Bushing: Bushing shall be polyamide (nylon) per L-P-410 or ASTM D4066-82, type I (see figure 3).

Polarizing bushing color: The polarizing bushing color shall be the natural color of the base material.

Standard contact plating: Standard contact plating shall be in accordance with MIL-C-28754.

Localized contact finish: Contacts may be supplied with a localized finish. Contacts supplied with localized finish shall meet the requirements of MIL-C-28754 and this slash sheet. Contacts supplied with a localized finish shall conform to figures 2 and 4.

Gold finish: Gold shall be in accordance with MIL-G-45204, type II, grade C, class 1, and to a thickness of 50 microinches minimum. Area of gold finish shall be as specified on figure 4.

Nickel finish: Nickel finish shall be in accordance with QQ-N-290, class 1, and to a thickness of 50 microinches minimum over the entire contact surface (see figure 4).

Tin-lead finish: Tin-lead finish shall be in accordance with MIL-P-81728 and shall have a tin-composition of 50 to 95 percent. Tin-lead plating thickness shall be .0001 to .0003 inch thick.

Performance:

Low level (dry circuit): Voltage drop shall not exceed 20 millivolts. Wire size shall be 26 AWG.

Contact resistance: Voltage drop shall not exceed 20 millivolts.

Current rating: 3 amperes.

Voltage rating: 300 volts, ac (rms) at sea level.

Temperature rating: -55°C to +105°C.

Marking: In accordance with MIL-C-28754.

Shipping: Bulk shipping shall be in unassembled condition.

Military part number M28754/37- (dash number from table I).

Supersession data: This specification includes the requirements of drawing number WS6157/4, code identification 10001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions.

Dash no.	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
01	a	0.513	0.175
02	b	"	"
03	c	"	"
04	d	"	"
05	e	"	"
06	f	"	"
07	g	"	"
08	h	"	"
09	i	"	"
10	j	"	"
11	k	"	"
12	l	"	"
13	m	"	"
14	n	"	"
15	p	"	"
16	q	"	"
17	r	"	"
18 1/	s	"	"
19	a	0.588	0.250
20	b	"	"
21	c	"	"
22	d	"	"
23	e	"	"
24	f	"	"
25	g	"	"
26	h	"	"
27	i	"	"
28	j	"	"
29	k	"	"
30	l	"	"
31	m	"	"
32	n	"	"
33	p	"	"
34	q	"	"
35	r	"	"
36 1/	s	"	"
37	a	0.688	0.350
38	b	"	"
39	c	"	"
40	d	"	"
41	e	"	"
42	f	"	"
43	g	"	"
44	h	"	"
45	i	"	"
46	j	"	"
47	k	"	"
48	l	"	"
49	m	"	"
50	n	"	"
51	p	"	"
52	q	"	"
53	r	"	"
54 1/	s	"	"

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions - Continued.

Dash no.	Polarizing style (figure 3d)	Overall length "A" ±0.010	Wrappost length "B" (Ref)
55	a	0.838	0.500
56	b	"	"
57	c	"	"
58	d	"	"
59	e	"	"
60	f	"	"
61	g	"	"
62	h	"	"
63	i	"	"
64	j	"	"
65	k	"	"
66	l	"	"
67	m	"	"
68	n	"	"
69	p	"	"
70	q	"	"
71	r	"	"
72 1/	s	"	"
73	a	0.963	0.625
74	b	"	"
75	c	"	"
76	d	"	"
77	e	"	"
78	f	"	"
79	g	"	"
80	h	"	"
81	i	"	"
82	j	"	"
83	k	"	"
84	l	"	"
85	m	"	"
86	n	"	"
87	p	"	"
88	q	"	"
89	r	"	"
90 1/	s	"	"
91	a	1.088	0.750
92	b	"	"
93	c	"	"
94	d	"	"
95	e	"	"
96	f	"	"
97	g	"	"
98	h	"	"
99	i	"	"
100	j	"	"
101	k	"	"
102	l	"	"
103	m	"	"
104	n	"	"
105	p	"	"
106	q	"	"
107	r	"	"
108 1/	s	"	"

1/ Keying pegs for insertion into the octal hole are covered by MIL-C-28754/39.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

QUALIFICATIONS:

Qualification testing: Test plate samples shall be submitted in accordance with MIL-C-28754, type III sample, and each shall be pinned at the ends of all pin patterns with one style polarizing bushing set as specified in table I. Ten of each style polarizing bushing (see table I, styles a through s) and 10 of each other wrappost lengths (see table I) to be qualified shall be submitted as loose parts. The test plates shall be subjected to group A inspection. The loose parts shall be subjected to group A inspection. Loose part qualification is contingent upon satisfactory results from the test plate testing.

Localized contact finish: The qualification of the contact supplied with the standard finish does not extend qualification to the contact supplied with the localized finish. To be qualified to supply the localized finish in lieu of the standard contact finish, manufacturers shall subject the contact supplied with localized finish to the same qualification procedures as the standard contact finish. Manufacturers that have qualified the localized finish contact will be designated on the Qualified Products List (QPL).

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Navy - MC, TD
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AR, MI
Navy - AS, YD

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5935-3406-24)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-28754/37C	CONNECTORS, ELECTRICAL, MODULAR, CONNECTOR, TYPE III

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for submitting comments and suggestions for improvements. All users of military standardization documents are invited to p suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE* mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretati too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate th problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are beinp considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification o specification requirements on current contracts. Comments submitted on this form do not constitute or imply authoriz to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Naval Electronic Systems Command
Washington, DC 20363

NO P
NEC
IF M
IN
UNITE

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20363
ATTN: ELEX 8111

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:41Z
Check the source to verify that this is the current version before use.